



X*PERT™ THERMO DRAWERS

MODELS: SPTU-30N, SPTU-30, SPTU-50N, & SPTU-50



The X*PERT™ Series Thermo Drawer is the perfect complement to roller grills. Thermo drawers hold hot food products for up to six hours without sacrificing the quality and appearance of the products. With the ability hold products longer, you will reduce waste by moving product from the roller grill to the thermo drawer.

The radiant heating system ensures even heat distributions so all products remain at a consistent temperature. The control system is easy to use, simply set the timer to a specified time and the unit will go into Heat Mode and then automatically enter Hold Mode when the timer hits zero.

OPTIONS & ACCESSORIES

- Optional Wire Rack for heating breaded product
- Divider Bar Kit for keeping product separated for SPTU-50 & SPTU-50N (25000110)
- Divider Bar Kit for keeping product separated for SPTU-30 & SPTU-30N (25000109)

WARRANTY

APW Wyott X*PERT™ Series Thermo Drawers are backed by a 1-year parts and labor warranty, including on-site service calls within 50 miles of authorized service technicians.

CERTIFICATIONS

Certified by the following agencies:




FEATURES AT A GLANCE

- Larger & deeper drawer designed to accommodate both standard size products as well as larger sized items
- Product temperature variance under 10°F while in hold mode
- Drawer is completely removable for easy cleaning
- Drawers utilizes heavy duty bearing/roller design for many years of problem free performance
- The space saver/slim-line design allows for this unit to be used with any roller grill system or as a stand-alone unit
- Increase holding times for up to 6 hours without sacrificing the quality and appearance of the product
- Reduce waste from over-cooked product on the roller grill
- Ensure even heat distribution with innovative radiant heating system
- Heat a variety of items at the same time
- Makes product transfer fast, safe, and sanitary
- Stainless steel construction
- Cool to the touch exterior
- Easy to operate with a simple control system
- Can easily fit under any roller grill to save counter space

2M-Z25185 REV - (11-22)

EQUIPMENT DIMENSIONS

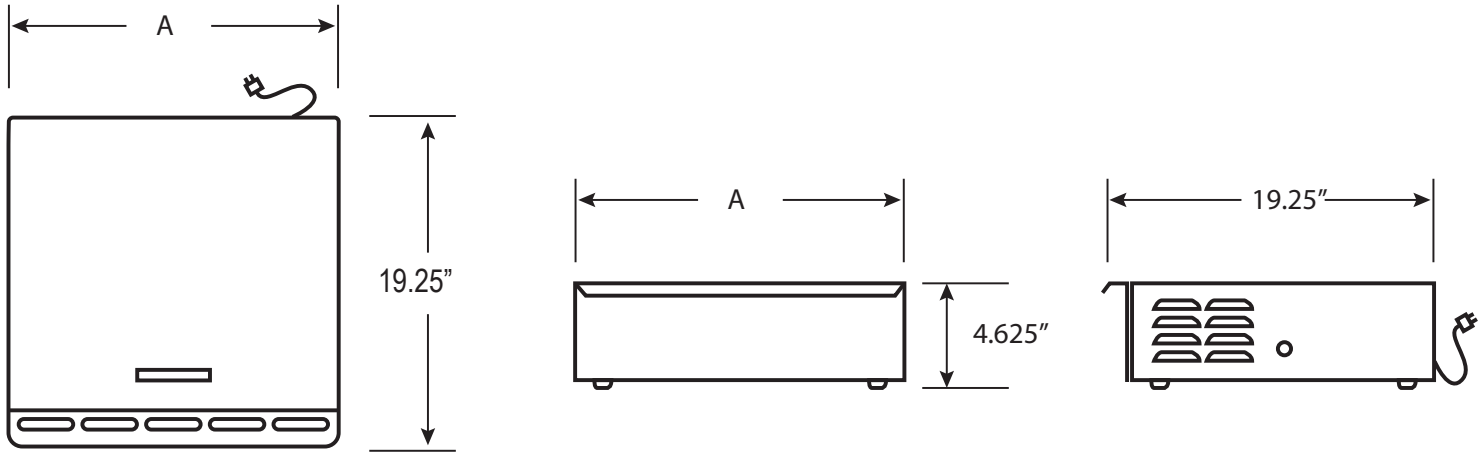

MECHANICAL SPECIFICATIONS

Model #	Watts	Voltage	Phase	Amps	Overall Dimensions Width (A) x Height* x Depth** (inches / mm)	Ship Weight (lbs. / Kilos)
SPTU-30N	365	120	1	3.0	19.25" x 4.625" x 19.25" (489 x 159 x 489)	55 (25 kg)
SPTU-30N	365	208/240	1	1.6/1.8	19.25" x 4.625" x 19.25" (489 x 159 x 489)	55 (25 kg)
SPTU-30	495	120	1	4.125	23.75" x 4.625" x 19.25" (603 x 159 x 489)	55 (25 kg)
SPTU-30	495	208/240	1	2.1/2.4	23.75" x 4.625" x 19.25" (603 x 159 x 489)	55 (25 kg)
SPTU-50N	700	120	1	5.8	30.25" x 4.625" x 19.25" (768 x 159 x 489)	80 (36.3 kg)
SPTU-50N	700	208/240	1	3.0/3.5	30.25" x 4.625" x 19.25" (768 x 159 x 489)	80 (36.3 kg)
SPTU-50	700	120	1	5.8	34.75" x 4.625" x 19.25" (883 x 159 x 489)	80 (36.3 kg)
SPTU-50	700	208/240	1	3.0/3.5	34.75" x 4.625" x 19.25" (883 x 159 x 489)	80 (36.3 kg)

*Height includes legs. **Depth includes handle.

REQUIRED CLEARANCES

	Combustible
Left	N/A
Right	N/A
Back	N/A

ELECTRICAL INFORMATION

Each unit is equipped with at least a 66", three wire grounded power cord, which terminates with a standard three-pronged male plug. The U.S. 120V units utilize a NEMA 5-15P plug, the U.S. 208/240V units utilize a NEMA 6-15P plug.

Freight Class: 100
FOB: Smithville, TN 37166

APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.