

## Pampa Chair

SKU:CHMORE-401-Pampa S



Black, white or brick powder-coated steel frame. Upholstered seat and back with recycled fabric.

Width: 63 cm - 25 in

Height: 81 cm - 32 in

Seat height: 48 cm - 19 in

Depth: 55 cm - 21.5 in

Weight: 8 kg - 17.5 lb

Packaging: 0,31 mq

Pieces per box: 1



white



brick red



black

# Pampa CounterStoolounte

SKU:CHMORE-403--Pampa SG-65G-65



Black, white or brick powder-coated steel frame. Upholstered seat and back with recycled fabric.

Width: 56 cm - 22 in

Height: 89 cm - 35 in

Seat height: 65 cm - 25.5 in

Depth: 53 cm - 21 in

Weight: 8,8 kg - 19.5 lb

Packaging: 0,37 mq

Pieces per box: 1



white



brick red



black

# Pampa Barstoolstool

SKU:CHMORE-403-Pampa SG-80



Black, white or brick powder-coated steel frame. Upholstered seat and back with recycled fabric.

Width: 56 cm - 22 in

Height: 105 cm - 41.5 in

Seat height: 81 cm - 32 in

Depth: 53 cm - 21 in

Weight: 9,5 kg - 21 lb

Packaging: 0,36 mq

Pieces per box: 1



white



brick red



black

## Secret

1003	1025	1016	1017
			
1027	1012	1014	1009
			

**FEATURES**  
76% PVC 22% PES 2% PU

**LIGHTFASTNESS**  
6/7 ISO 105 B 02

**FASTNESSTORUBBING**  
DRY 5, WET 5, ISO 1050X12

**ABRASION RESISTANCE**  
60.000 CYCLES ISO 5470-2

**FIRE RESISTANCE**  
UNI 9175 classe 1M  
BS 5852-1 cigarette test  
BS 5852-1 match test

Cat. A

## Caliente

400	606	406	200
			
500	309	801	706
			

**FEATURES**  
52% POLIPRO, 48% PL

**LIGHTFASTNESS**  
4/5 ISO 105 B 02

**FASTNESSTORUBBING**  
DRY 4/5, WET 4, ISO 1050X12

**ABRASION RESISTANCE**  
40.000 CYCLES UNI EN ISO 12947-2

**FIRE RESISTANCE**  
1IM - UNI 9175  
EN 1021 part 1/2  
NFPA 260 Class 1  
California TB 117:2013  
IMO MED - Ftp 307 part 8  
IMO MED - Ftp 307 part 7

Cat. A

## Angel

56/201	57/200	20/406	53/401
			
35/305	39/700	41/502	38/002
			

**FEATURES**  
100% POLIPRO

**LIGHTFASTNESS**  
5/6 ISO 105 B 02

**FASTNESSTORUBBING**  
DRY 5, WET 4/5, ISO 1050X12

**ABRASION RESISTANCE**  
100.000 CYCLES  
UNI EN ISO 12947-2

**FIRE RESISTANCE**  
1IM - UNI 9175  
EN 1021 part 1/2  
BS 5852 crib 5

**NFPA 260 Class 1**  
California TB 117:2013  
IMO MED - Ftp 307 part 8

Cat. A

## Angel combo

600	203	702	404
			
301	308	302	701
			

**FEATURES**  
100% POLIPRO

**LIGHTFASTNESS**  
5 ISO 105 B 02

**FASTNESSTORUBBING**  
DRY 5, WET 4/5, ISO 1050X12

**ABRASION RESISTANCE**  
50.000 CYCLES UNI EN ISO 12947-2

**FIRE RESISTANCE**  
1IM - UNI 9175  
EN 1021 part 1/2  
BS 5852 crib 5  
NFPA 260 Class 1  
NFPA 260 Class 1  
California TB 117:2013  
IMO MED - Ftp 307 part 8

Cat. A

## Magnum tex

501	300	806	601
			
803	706	901	902
			

**FEATURES**  
88% PVC 7% PL 4% CO 1% PO

**LIGHTFASTNESS**  
> 7 ISO 105 B 02

**FASTNESSTORUBBING**  
DRY 5, WET 5, ISO 1050X12









**ABRASION RESISTANCE**  
> 100.000 CYCLES  
UNI EN ISO 12947-2

**FIRE RESISTANCE**  
1IM - UNI 9175  
EN 1021/1/2  
BS 5852 part 1, is 0 and 1  
NFP 92 503 M3  
NFPA 260 Class 1  
California TB 117-2013

**IMO FTP Code 307 part 8**  
ÖNOM B 3825 - schwer brennbar

Cat. B

## Opera

101	600	201	200
			
402	800	305	700
			

**FEATURES**  
100% WO

**LIGHTFASTNESS**  
5 ISO 105 B 02

**FASTNESSTORUBBING**  
DRY 4/5, WET 4, ISO 1050X12

**ABRASION RESISTANCE**  
50.000 CYCLES UNI EN ISO 12947-2

**FIRE RESISTANCE**  
1IM - UNI 9175  
EN 1021 part 1/2  
BS 5852 part 1, is 0  
BS 5852 crib 5  
NFD 60013 - AM.18

**California TB 117-2013**  
IMO FTP Code 307 part 8

Cat. C

Tailor

Cat. B



<b>FEATURES</b> 100% PES <b>LIGHTFASTNESS</b> 6 ISO 105 B02	<b>FASTNESSTORUBBING</b> DRY 4/5, WET 4/5, ISO 1050X12 <b>ABRASION RESISTANCE</b> 100.000 CYCLES UNI EN ISO 12947-2	<b>FIRE RESISTANCE</b> UNI 9175 classe 1IM
--	--	---

Aida

Cat. C



<b>FEATURES</b> 100% PL <b>LIGHTFASTNESS</b> 5 ISO 105 B02	<b>FASTNESSTORUBBING</b> DRY 4/5, WET 4, ISO 1050X12 <b>ABRASION RESISTANCE</b> 150.000 CYCLES UNI EN ISO 12947-2	<b>FIRE RESISTANCE</b> 1M - UNI 9175 class 1 - UNI 9177 class 1 - EN 13773 EN1021 part1/2 BS 7176 + A1 medium hazard BS 5852 crib 5	<b>NF - P 92503 - M1</b> <b>DIN 4102 - B1</b> <b>NFPA 260</b> <b>NFPA 701 pass</b> <b>California TB 117-2013</b> <b>IMOMED - Ftp 307 part 8</b> <b>ÖNOM B 3825 - schwer b rennbar</b>
---	--	---	---

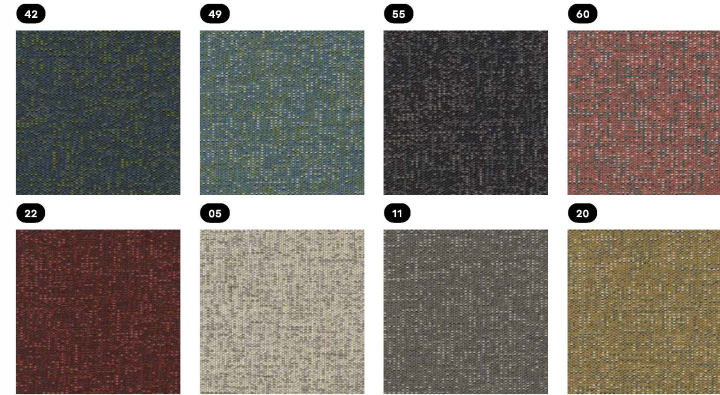
Lani

Cat. D



Galaxy

Cat. D



<b>FEATURES</b> 58% WO 19% PP 17% PES 6% CO <b>LIGHTFASTNESS</b> 5/6 ISO 105 B02	<b>FASTNESSTORUBBING</b> DRY 4/5, WET 4, ISO 1050X12 <b>ABRASION RESISTANCE</b> 35.000 CYCLES UNI EN ISO 12947-2	<b>FIRE RESISTANCE</b> BS 5852 0/1 BS 7176 Low hazard California TB 117-2013 NFPA 260-2013, CLASS 1 UNI 9175 Class 3IM
---	---	---