

Electronic Heavy Duty Throttle Pedal 962 000 series



3. Options:

A/ CAN J1939

J1939 Parameters:

- J1939 Messages and signals can be activated according to MCS Throttle default values or customer specifications.
- J1939 Parameters like SA (Source Address) or NAME fields can be set according to MCS Throttle default values or customer specifications.
- Optional messages such as DTC (DMx, FMI, MIL, ...) can be activated upon customer request.


Electrical specifications:

Power Supply	+8 .. 32VDC
Current consumption	40mA max.
J1939 Connector	Deutsch #DT06-3S (J1939/11)



B/ 4-20mA current output signals

Power Supply	+8 .. 32VDC
Current output signal	4 - 20mA

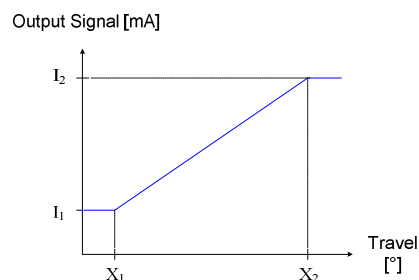

C/ Customized parts available



With wire harness and special mounting plate



With a swivel arm



With a rubber cover



With twin sensor
(up to 4 output signals)

5. Typical Applications:



6. Compatible with the following engines:

- | | | |
|------------------|-----------------|-------------------|
| • CATERPILLAR | • JCB | • PERKINS |
| • CUMMINS | • JOHN DEERE | • RENAULT |
| • DACHAI | • KUBOTA | • SCANIA |
| • DEAWOO | • LIEBHERR | • SHANGHAI DIESEL |
| • DAF | • LOVOL | • SISU DIESEL |
| • DETROIT DIESEL | • MAN | • VOLKSWAGEN |
| • DEUTZ | • MERCEDES-BENZ | • VOLVO |
| • HINO | • MTU | • WEICHAI |
| • ISUZU | • NAVISTAR | • YANMAR |
| • IVECO | • NISSAN | • YUCHAI |