

ITEM NO:	
PROJECT:	
DATE:	

Refrigerated Self-Service Single Deck Case



	Lengths include 1-1/8" end panels
□ GLDSS4R	51"L x 47-7/8"D x 35"H
□ GLDSS5R	62-7/8"L x 47-7/8"D x 35"H
□ GLDSS6R	75-3/8"L x 47-7/8"D x 35"H
□ GLDSS8R	99-3/4"L x 47-7/8"D x 35"H

STANDARD FEATURES

- Breeze w/EnergyWise s/c refrigeration
- Compressor air intake from rear and out front panel at toe kick. Front panel cannot be blocked.
- Corrosion resistant stainless steel tub & fan shroud
- Integrated average product temperature of 40°F or less
- One year parts & labor; 5 year compressor warranty

Features	Standard	Options						
EXTERIOR COLOR	□ Laminated (non-premium) Confirm pattern/grain direction	□ Laminated (premium) Confirm pattern/grain direction □ Painted (stock colors, specify RAL#) □ Stainless steel						
INTERIOR COLOR	□ Black	□ Stainless steel						
REAR EXTERIOR COLOR	□ Stainless steel	□ Painted - Black □ Painted - White						
BASE	□ Casters w/ levelers (n/a w/ remote ref.)	□ 6"H legs (n/a w/ remote ref.)						
END PANEL LEFT	□ Full end panel w/mirror interior	 □ Cutaway w/acrylic end panel □ No end panel w/ synchronized defrost 						
END PANEL RIGHT	□ Full end panel w/mirror interior	 □ Cutaway w/acrylic end panel □ No end panel w/ synchronized defrost 						
LOWER FRONT PANEL	□ Painted - Black	□ Stainless steel						
UPPER REAR LEDGE	□ Black Sanalite®	 □ Solid surface (specify color) □ Stainless steel □ White Sanalite® 						
ELECTRICAL CONNECT	□ 6' Straight blade power cord (self-cont.)	□ 6' Locking power cord (self-cont.)□ Electrical leads (remote)						
REFRIGERATION	□ Breeze w/EnergyWise s/c refrigeration	 □ NOTE: Remote only available w/rail base w/shims. N/A w/ levelers, casters or legs. □ Note: Remote doesn't incl Conds unit. Floor drain reqd. □ Remote w/thermostat, solenoid & TXV 						
MISCELLANEOUS		 □ Refrigerated rear storage (remote only) w/ sneeze guard □ Second year parts & labor warranty (excludes compressor) 						
ACCESSORIES		□ 2"H Full depth display riser(s) □ Clean Sweep® coil cleaner (n/a w/remote)						





Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.


Intended Product To Be Displayed Warmest Avg Prod Temp ° F Zone Packaged refrigerated products

PLAN VIEW

SIDE VIEW

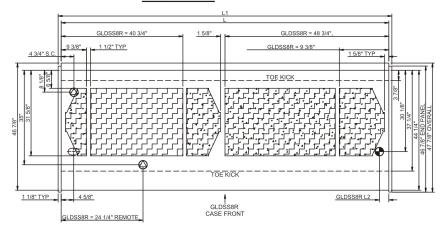





NOTE: ALL DIMENSIONS APPROXIMATE

© ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD). REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 11/2" PVC TUBE).

SELF-CONTAINED CASE SERVICE ACCESS AREA.

REFRIGERATION LINE CONNECTION.

DRY CASE SERVICE ACCESS AREA.

	OAGET ROTT						<u> </u>									
Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
GLDSS4R	48.75	51.00	3.50	Optional Skirt Light	Circuit #1	110-120	1	60	0.70	6	2+G	Leads Multiple	N/A	N/A	N/A	700
				Remote(Type I)	Circuit #1	110-120	1	60	0.48	36	2+G	Leads Multiple	20.00	2333	2160	
				Self-Contained	Circuit #1	110-120	1	60	12.00	1,016	2+G	5-20P or L5-20P	N/A	N/A	N/A	
GLDSS5R	60.63	62.88	3.50	Optional Skirt Light	Circuit #1	110-120	1	60	0.70	8	2+G	Leads Multiple	N/A	N/A	N/A	950
				Remote(Type I)	Circuit #1	110-120	1	60	0.71	42	2+G	Leads Multiple	20.00	3020	2796	
				Self-Contained	Circuit #1	110-120	1	60	15.07	1,385	2+G	5-20P or L5-20P	N/A	N/A	N/A	
GLDSS6R	73.13	75.38	3.50	Optional Skirt Light	Circuit #1	110-120	1	60	0.70	10	2+G	Leads Multiple	N/A	N/A	N/A	1,000
				Remote(Type I)	Circuit #1	110-120	1	60	0.89	63	2+G	Leads Multiple	20.00	3499	3240	
				Self-Contained	Circuit #1	110-120	1	60	15.25	1,405	2+G	5-20P or L5-20P	N/A	N/A	N/A	
GLDSS8R	97.50	99.75	3.50	Optional Skirt Light	Circuit #1	110-120	1	60	0.70	13	2+G	Leads Multiple	N/A	N/A	N/A	1,100
				Remote(Type I)	Circuit #1	110-120	1	60	1.33	115	2+G	Leads Multiple	20.00	4709	4360	
				Self-Contained	Circuit #1	110-120	1	60	15.69	1,458	2+G	5-20P or L5-20P	N/A	N/A	N/A	

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

Accordance with AHRI Std 1200

ETL Listed to UL 471

ETL Listed to CAN/CSA 22.2 No. 120

ETL Sanitation to NSF 7

AHRI Std 1200



Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Units are supplied with levelers. They must be adjusted during installation to ensure units is level and plumb. Dimensions reflect levelers extended 1 1/4"

MARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.