



MBBB69-G



Approved to NSF standard for packaged food products.

## MBBB-G SERIES

### Glass Door Back Bar Refrigerators

#### MODELS

- MBBB59-G
- MBBB69-G
- MBBB79-G
- MBBB95-G

### FEATURES

#### CONSTRUCTION

- Stainless steel top
- Black steel finish on front, door, sides and back
- Galvanized steel interior with stainless steel floors
- Foamed-in-place with low ODP polyurethane insulation
- Wall thickness: 1 1/2"
- Two adjustable shelves per section
- Interior LED lighting
- Adjustable temperature control
- Internal height capacity allows stacking of three "tall boy" beers

#### DOORS

- Standard door locks on each door
- Magnetic door gaskets, removable without tools
- Door openings have plastic breaker strips to reduce condensation

#### REFRIGERATION

- Self-contained refrigeration system metered by capillary tube
- Front breathing compressor on left side
- Evaporator coils are epoxy-coated to resist corrosion
- Condensate evaporator
- Slide-out condensing unit for easy cleaning and service

- Refrigerant: R290
- Temperature range: 34° to 38°F (1° to 3°C)

#### WARRANTY

- **Standard limited three year parts and labor**
- **Additional two year coverage on compressor part**

#### OPTIONS

- Shelves with bottle dividers
- 4" plate casters
- Floor protector kits
- Solid doors

### BID SPECIFICATIONS

Item no. MBBB\_\_\_\_-G. Provide \_\_\_\_\_ Glass Door Back Bar Refrigerator, Master-Bilt® model no. MBBB\_\_\_\_-G.

Back bar refrigerator will feature stainless steel top with black finish on front, door, sides and back. Interior will be galvanized steel with stainless steel floors. Door openings will have plastic breaker strips to

reduce condensation. Adjustable epoxy-coated shelves and interior LED lighting will also be standard.

The refrigeration system will be self-contained and use R290 refrigerant. The temperature range will be 34° to 38°F (1° to 3°C). System will be equipped with coated evaporator coils and a condensate

evaporator. Condensing unit will be slide-out type for easy cleaning and service.


Refrigerator to have standard limited 3-year parts and labor warranty with additional 2-year coverage on compressor part.

Refrigerator to be UL, C-UL and ETL Sanitation listed as well as approved to NSF standard for packaged food products.


### TECHNICAL SPECIFICATIONS

MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF DOORS	NO. OF SHELVES	CAPACITY 12 OZ. CANS/ 12 OZ. BOTTLES	SHIP CU. FT.	SHIP WT. (LB/KG)
	L	D*	H	L	D*	H								
MBBB59-G	59	29 <sup>5</sup> / <sub>8</sub>	37	1499	752	940	115	3.5	3/8	2	4	1084/498	47.0	256/116
MBBB69-G	69 <sup>1</sup> / <sub>8</sub>	29 <sup>5</sup> / <sub>8</sub>	37	1756	752	940	115	3.5	3/8	2	4	1299/594	55.0	287/130
MBBB79-G	80 <sup>3</sup> / <sub>4</sub>	29 <sup>5</sup> / <sub>8</sub>	37	2051	752	940	115	3.5	3/8	3	6	1566/714	64.0	331/150
MBBB95-G	95 <sup>1</sup> / <sub>4</sub>	29 <sup>5</sup> / <sub>8</sub>	37	2419	752	940	115	3.5	3/8	3	6	1875/858	75.0	370/168


\* Depth includes door handles and back bumper.




MBBB59-G PLAN VIEW




MBBB59-G ELEVATION VIEW




ALL MODELS SIDE VIEW




MBBB69-G PLAN VIEW




MBBB69-G ELEVATION VIEW

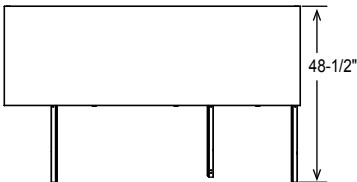


MBBB79-G PLAN VIEW



MBBB79-G ELEVATION VIEW

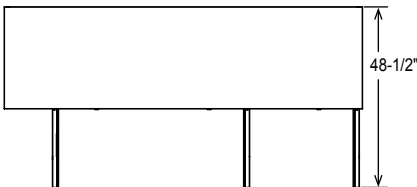

MBBB95-G PLAN VIEW

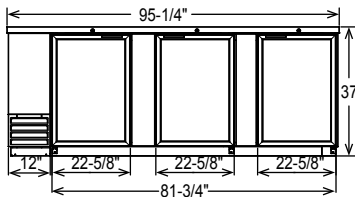

MBBB95-G ELEVATION VIEW


### LISTINGS



Approved to NSF standard for packaged food products.

### HOOKUP

All models via plug in, 9 foot long flexible three wire 14 gauge cord with molded plug.



NEMA 5-15P

**NOTE:** Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.