

Models

☐ IDT1900WM

☐ IYT1900WM


IT1900WM series ice machine

Stainless Steel:

Top Cover
Side Panels
Back Panel
Bulkhead
Brackets
Fasteners



Stainless Steel Bulkhead

New Marine model features the Indigo NXT platform, providing 10-15 % reductions in energy usage, 10 % reduction in potable water usage and 23 % reduction in condenser water usage from model.

- **Isolation switch** immediately cuts power to the entire unit.
- **Indigo NXT feature set** including automatic cleaning that returns to the ice making process without manual intervention.
- **Cupra-nickel condenser** adds protection from salt water.
- **Completely sealed unit:** front, back, top and sides.
- Meets **USPHS** specifications.
- All exterior panels made from **High Grade Stainless Steel**.



Need a Marine Bin?

Please contact the Manitowoc Ice sales department for details.



Model Shown
IBW-M5 Marine Bin



Isolation switch

Ice Shape




Half Dice
3/8" x 1 1/8" x 7/8"
(0.95 x 2.86 x 2.22 cm)



Dice
7/8" x 7/8" x 7/8"
(2.22 x 2.22 x 2.22 cm)



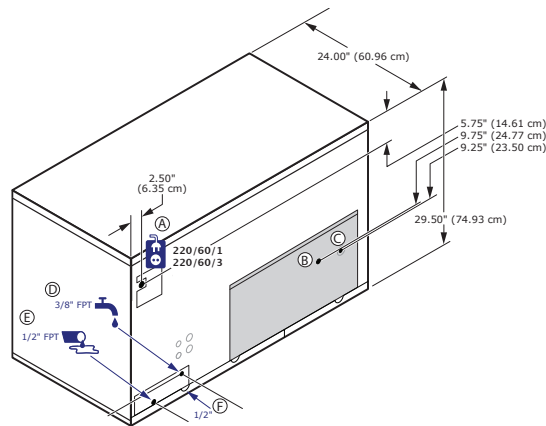

- Ⓐ Electrical Entrance (2) Options
- Ⓑ 1/2" (1.27 cm) F.P.T. Water Condenser Outlet (water-cooled units)
- Ⓒ 3/8" (0.95 cm) F.P.T. Water Condenser Inlet (water-cooled units)
- Ⓓ 3/8" (0.95 cm) F.P.T. Ice Making Water Inlet
- Ⓔ 1/2" (1.27 cm) F.P.T. Ice Making Water Drain
- Ⓕ 1/2" (1.27 cm) Auxiliary Base Drain Socket

Series iT1900 Operating Limits:

- Ambient Temperature Range:
40 to 110°F (4.4 to 43.3°C)
- Water Temperature Range:
Potable water: 40 to 90°F (4.4 to 32.3°C)
- Water Pressure Ice Maker Water In:
Min. 20 psi (137.9 kPa), Max. 80 psi (551.1 kPa)
- Condenser Inlet Water In:
Min. 20 psi (137.9 kPa), Max. 276 psi (1902.95 kPa)

Series 1900
29.50" H x 48.00" W x 24.50" D
74.9 cm x 121.9 cm x 62.2 cm
Order ice storage bin separately.
Note: Placing iT1900 on a non-Manitowoc ice bin or "F" Model Manitowoc Ice bin requires installation of ice deflector K-00349

Electric: 208-230/60/1 available in Dice and Half dice.

Half dice also available in 208-230/60/3.

Min. circuit ampacity:

15 1ph, 12.8 3ph

Max. fuse size:

25 amps 1ph

20 amps 3ph

Refrigerant:

R410A CFC Free

BTU per Hour:

26,100 (average) 30,500 (Peak)

Specifications

Model	Ice Shape	Ice Production 24 Hours		Power Usage kWh/100 lbs. @90°F Air/70°F F	Potable Water Usage/100 lbs. 45.4 kgs. of Ice
		70°F Air/ 50°F Water	90°F Air/ 70°F Water		
IDT-1900WM	dice	1900 lbs.	1666 lbs.	3.51	20 Gal.
		862 kgs	756 kgs		75.7 L
IYT-1900WM	half-dice	1960 lbs.	1759 lbs.	3.44	20 Gal.
		889 kgs	797 kgs		75.7 L

Water-cooled Condenser water usage 100lbs/45.4kg of Ice: 140gal/530L

Add an E after the 261 and 263. Example IYT1900W-261EM

Accessories

LuminIce® II Virus and Bacteria Inhibitor

controls viruses and
bacteria inside the ice
machine



Arctic Pure® Water Filters

reduces sediment
and chlorine odors
for better tasting ice.



iAuCS®

schedules and
performs routine ice
machine cleaning
automatically.



Welbilt reserves the right to make changes to the design or specifications without prior notice.