

Project Name _____
 Date _____ Part Number _____

PRODUCT



SKU	CLT-SEN-INT-MMT-2
Item Number	CLT-40012
Color	White

PARAMETER


Input	Operating Voltage Range	108-305V AC, 50/60Hz
	DC Input Voltage	-
	Rated Voltage	120-277V AC, 50/60Hz
	No-load Power	-
	Stand-by Power	<0.5W
Output	Working Mode	ON/OFF Function, 1-10V dimming
	Type of Load	Inductive or resistive load
	Load Capacity	120Vac: 3.6A; 270Vac:3/4A
	Current of Load	-
	Max Surge Capacity	30A (50% Ipeak, twidth=500uS, 230Vac full load, cold start); 60A (50% Ipeak, twidth=200uS, 230Vac full load, cold start)
Dim Interface	1-10V Dimming	Yes
Sensor Parameters	Operating Frequency	5.8 Ghz +75 MHz
	Transmitting Power	0.5mW Max
	Hold Time	5S/1min/5min/10min/15min/30min
	Stand-by DIM Level	10%-20%-30%-50% (set via 2 DIP switch)
	Stand-by Period	0S/10S/1min/10min/30min/1hr/
	Detection Sensitivity	100%-75%-50%-25% (set via 2 DIP switch)
	Daylight Sensor	5lux-15lux-30lux-50lux-100lux-15-lux-disable (set via 4 DIP switch)
	Daylight ON/OFF	-



DIMENSION

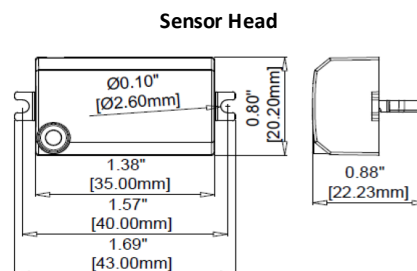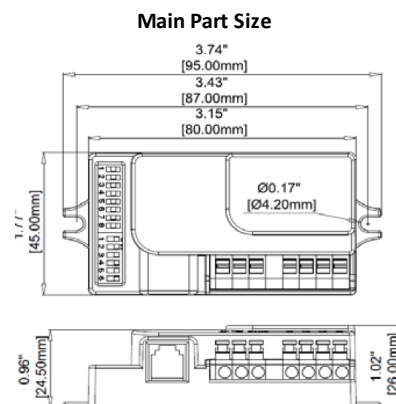

WIRING DIAGRAM

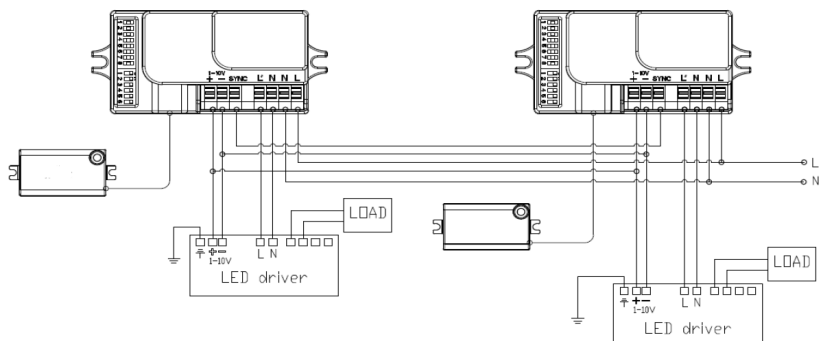

Structure

