
GLOBAL™ INDUSTRIAL
We can supply that.®

User Manual	Manual de Usuario	Manuel de l'Utilisateur
Customer Service US: 1-800-645-2986	Servicio de atención al Cliente US: 1-800-645-2986	Service à la clientèle Canada: 888-645-2986


Steel Safety Floor Curb

Models:
670812 670813,
670814, 670815,
670816, 670817


670812: 5/16" Thick, 48" Length
670813: 3/8" Thick,48" Length

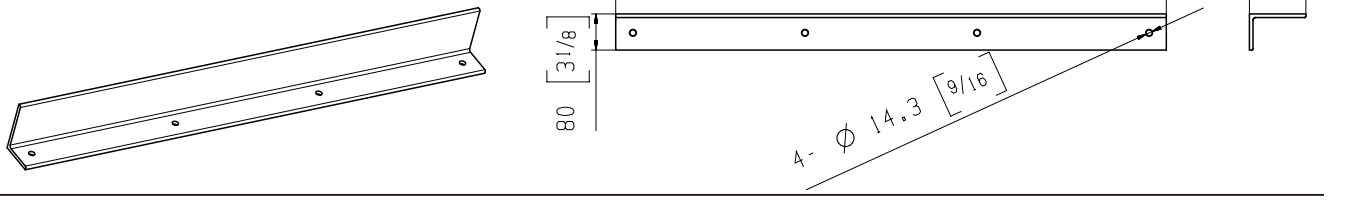

670814: 5/16" Thick, 45 Degrees
670815: 3/8" Thick, 45 Degrees

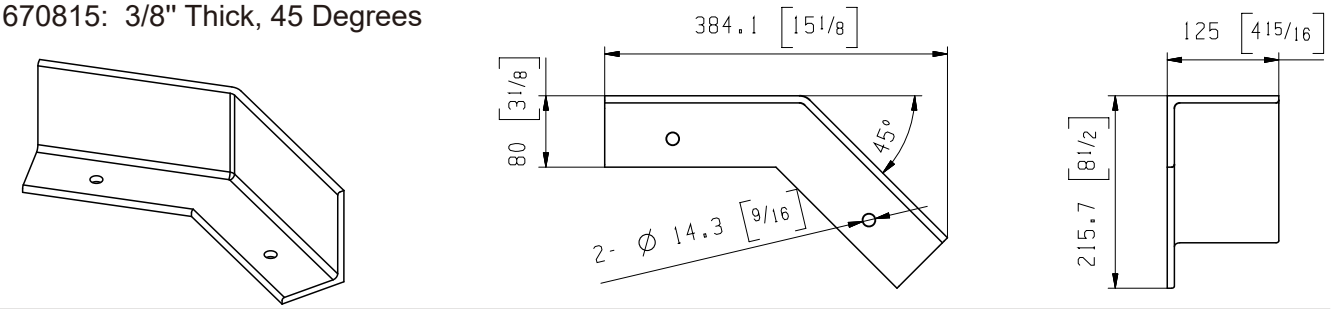

670816: 5/16" Thick, 90 Degrees
670817: 3/8" Thick, 90 Degrees

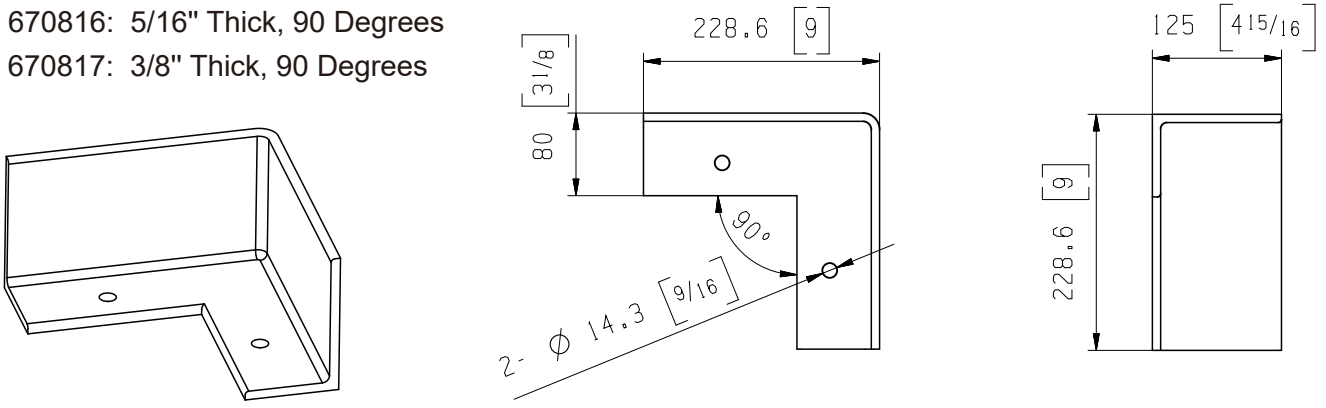

INSTALLATION

1. Verify the safety curb is positioned in the desired location. Mark the floor where holes will be drilled.
2. Using a 3/4" diameter masonry drill bit, drill a hole approximately 5" deep into the floor.
3. Clean out debris and dust from inside the hole. Fully insert 3/4" hex nut sleeve anchor bolt (sold separately) through the safety curb mounting hole and into the hole in the floor.
4. Slightly tap down the anchor bolt with a hammer if needed. Slide washer onto anchor bolt. Tighten the hex nut until the anchor bolt is secure.
5. Repeat for remaining anchors.

