


GLOBAL™ INDUSTRIAL
We can supply that.®

User Manual	Manual de Usuario	Manuel de l'Utilisateur
Customer Service US: 1-800-645-2986	Servicio de atención al Cliente US: 1-800-645-2986	Service à la clientèle Canada: 888-645-2986

Plastic Floor Curb

B3230693-3'L
B3230694-4'L
B3230689-5'L
B3230690-6'L
B3230691-7'L
B3230692-8'L
B3230695-9'L
B3230696-10'L

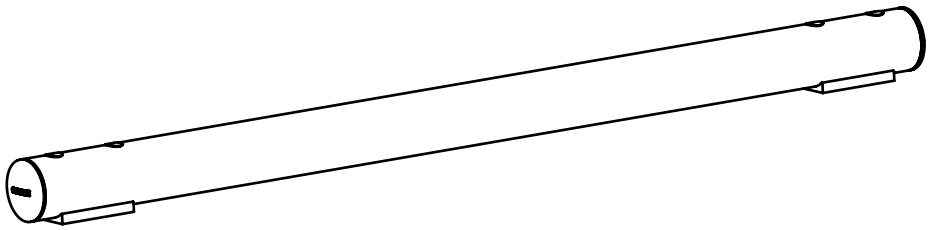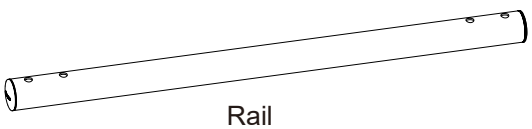

Parts List		Tools Required
 Rubber Pad 2 pcs	 Cap 4 pcs	 Impact Driver  3/4"Hex Socket  Pencil  Tape Measure  Chalk Line Tool
 Rail 1 pc	 Concrete Bolts (H1) 1/2" Dia. x 4 3/4" L 4 pcs	


This system was designed to meet ANSI I 9-7 standards with 20,000J impact rating with 24" load deflection.

**Please note, if coordinating under Global Industrial Plastic Guard Rails, size down from guard rail length. Example: coordinating with a 10ft guard rail, use 9ft floor curb

Plastic Floor Curb

Step1.

Measure 24in away from the protected objects, in the desired position.
Using the rail as a template mark the (4) holes.
Note: Use chalk line tool to align for straight run

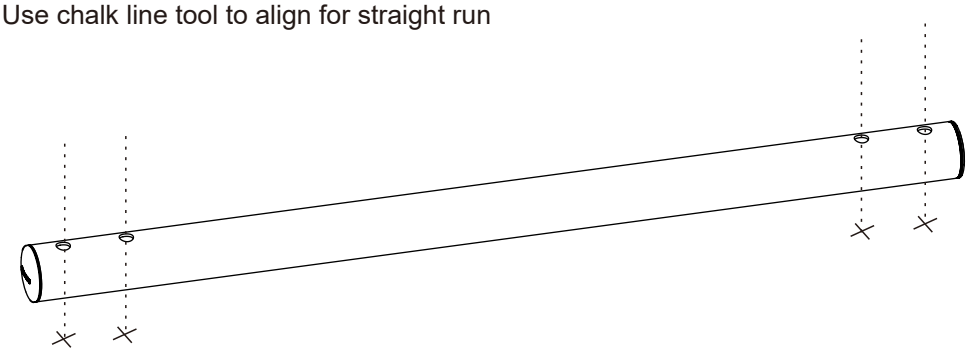


Step2.

Fasten the rail to floor with rubber pads and concrete bolts (H1).

Use impact driver with 3/4" hex socket for installation of H1concrete bolts

- o Drill 3-1/2" deep into ground
- o Vacuum out debris

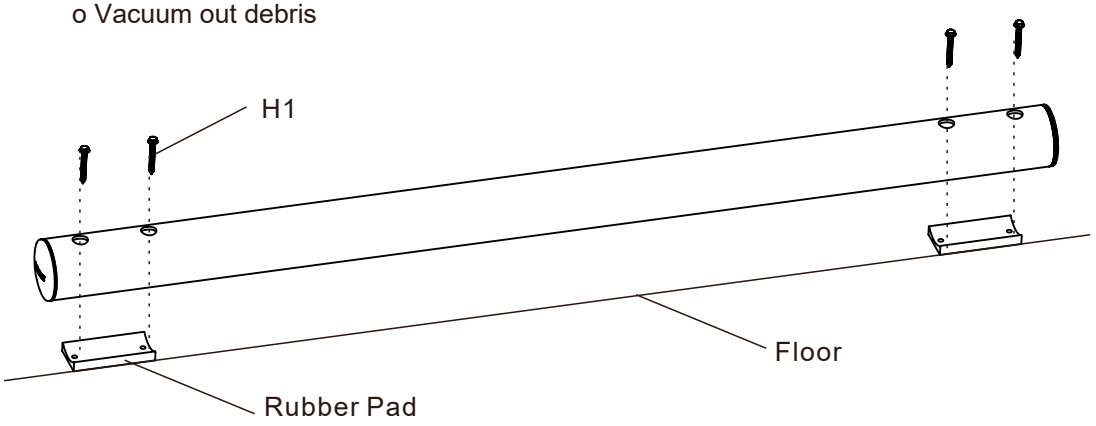

Step3.

Install four caps onto the rail.

