

RS Door Pulls


VW - MK4

READ BEFORE INSTALLATION

The use of any Rennline product is the sole responsibility of the end user. Rennline Inc. accepts no responsibility for warranty voids or damage resulting from the use of these products. Due to the varying location of wiring harnesses and other components, carefully inspect any area prior to drilling. All Rennline products are intended for off road use only and should be installed by a qualified automotive technician.

Check to make sure you have all parts listed prior to installation.
If anything is missing contact us immediately.

- (1) Strap Assembly (left)
 - (1) 4.25" Strap
 - (1) Strap Lever
- (1) Strap Assembly (Right)
 - (1) 4.25" Strap
 - (1) Strap Lever
- (1) Facia Plate (left)
- (1) Facia Plate (Right)
- (6) #8 - 3/8" S/S Truss Head Screws - C93406A192
- (2) 8/32" Button Head Screw - MS92949A191
- (2) 8/32" Nyloc Washer - MS90101A009

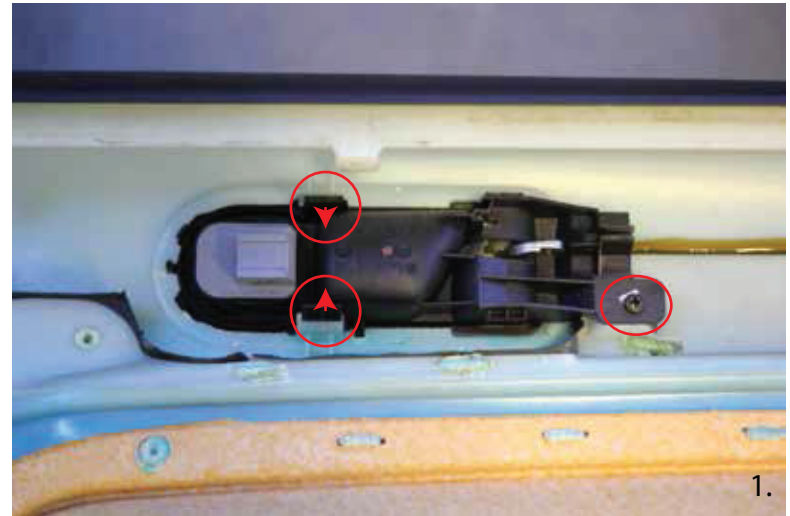

Before



Before



1. Remove the door card from the car door.
2. Remove the handle assembly from the door panel by removing the single screw circled and gently pushing the circled clips together as shown in photo 1.
3. With handle assembly uninstalled, open the handle as far open as possible. Then gently push down on the handle to free the top retaining point and pull the handle free from the assembly.
4. Using a cut off wheel, hack saw blade, Jig saw or equivalent, cut the plastic assembly as shown in photo 2 and 3. This is just a clearance slot for the new strap lever so it does not need to be pretty.
5. Install pull straps into replacement lever arms using the supplied 8/32nd inch nut and screw provided with the pull straps.

See next page.



4.



5.



6.



7.

6. Insert the assembled pull strap and lever arm into the handle assembly from the backside as shown in picture 4 and rotate so the pull is oriented as in picture 5. The fascia plate will hold them in place once installed. Make sure both top and bottom pulls catch retaining pins.

7. Place the front fascia plate into the plasting housing making sure to orient it correctly as shown in the finished product photo below. Mark and drill three mounting holes, two on top one on bottom using a 3/16" drill bit as shown in photo 6. Note: leave all three screws loose until desired fascia position is achieved.

8. Actuate the handle a few times to make sure that there are no clearance issues, make adjustments as needed.

9. Re-install the handle assembly into door card and the door card into the car.

10. With the windows down, open and close the door a few times using the new handles to confirm that everything is working properly.

11. Enjoy your new Rennline product.

