

**Dead Pedal**

986/987/996/997/991, Pano

**READ BEFORE INSTALLATION**

The use of any Rennline product is the sole responsibility of the end user. Rennline Inc. accepts no responsibility for warranty voids or damage resulting from the use of these products. Due to the varying location of wiring harnesses and other components, carefully inspect any area prior to drilling. All Rennline products are intended for off road use only and should be installed by a qualified automotive technician.

Check to make sure you have all parts listed prior to installation. If anything is missing contact us immediately.

- (1) Deal Pedal
- (2) #8 X 5/8 Truss Head Screws - MC93406A196


**P/N 101C & 102C  
Only**

1. Place the factory crest into the recessed area of the dead pedal with the post sticking through the hole.
  2. Secure the crest from the back of the pedal using the push nut that was supplied with your factory crest.
- Note: If your factory crest was not purchased through Rennline, it may be necessary to shorten the post so that it does not interfere with the pedal sitting flat against the factory plastic unit. You may also need to purchase the push nut if it was not supplied with your crest.

**P/N 101D & 102D  
Only**

1. Make sure your pedal is clean and free of any contaminates such as Armor All.
2. Remove the backing paper from the factory dome decal and place it in the recessed area of your Rennline pedal.
3. Press firmly over the entire surface of the decal.

**Installation of all 101 & 102 Configurations**

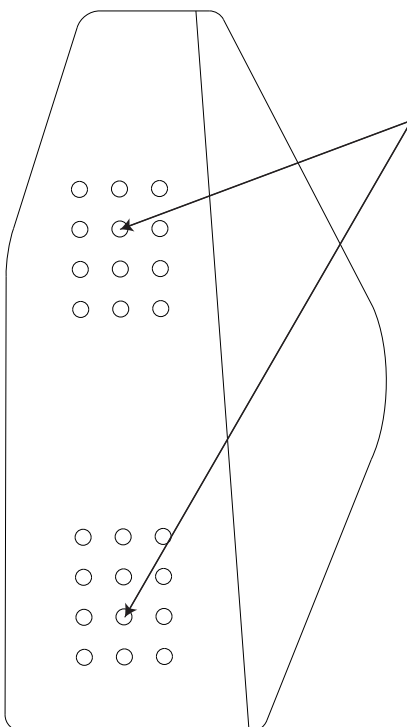

1. Place the Rennline pedal over the top of the factory plastic pedal.
2. Using a 1/16" drill bit, drill two holes into the factory plastic pedal in the locations marked with the arrows.
3. Install the 2 supplied truss head screws into the pre drilled holes.
4. Enjoy your new Rennline product.