

# Water Cooler Motor

**ITW-3429**



760-931-1500  
sales@arc-zone.com

## A-C MOTOR THERMALLY PROTECTED

- WARNING -

TERMINAL COVER MUST BE IN PLACE FOR SAFE OPERATION.  
GROUND IN ACCORDANCE WITH LOCAL & NATIONAL ELECTRICAL CODES.  
KEEP FINGERS & OBJECTS AWAY FROM OPENINGS & ROTATING PARTS.  
DISCONNECT POWER SOURCES BEFORE TOUCHING INTERNAL PARTS.

**HP 1/3**      **HZ 60/50**

**V 100-120/200-240**      **PH 1**

**RPM 1725/1425**      **CODE L**

**A 5.5-5.6/2.7-2.8**      **SF 1**


**SFA --**      **FR 48Y**

**AMB 40 C**      **INSUL CLASS F**      **NEMA DESIGN**

**TIME RATING CONT**      **ENCL: DP**

### VOLTAGE CONNECTIONS

LEAD	LOW VOLT	HIGH VOLT
BROWN	5	4
WHITE	2	5
RED	5	5
BLACK	A	A

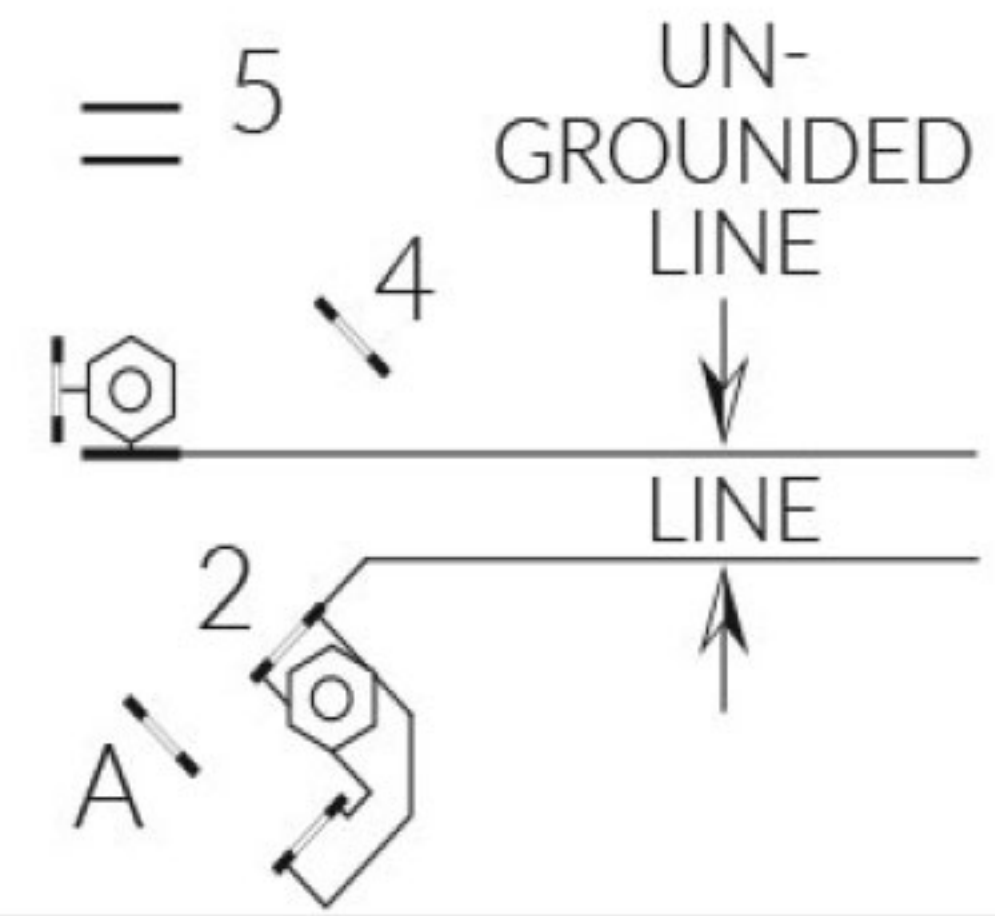

051

ALT 50 HZ DATA

6.4/3.2 AMPS

CCW ROTATION AS SHOWN, TO REVERSE ROTATION  
INTERCHANGE BLACK & RED.

PART #

**ITW-3429**

PERMANENTLY LUBRICATED BEARINGS,  
RELUBRICATION NOT REQUIRED.



236833



E46035

ASSEMBLED IN  
MEXICO

