

LED Downlight Retrofit

L12-DL5/6-27K-D
L12-DL5/6-30K-D
L12-DL5/6-40K-D

65-75W REPLACEMENT
12W LED

OVERVIEW

Simply Conserve® 12W LED Downlight Retrofit lamps are available in 3 different color temperatures—offering a range of options for your lighting needs. Select either our 2700K or 3000K lamps for warm-hued light ideal for living rooms, kitchens and bedrooms. Choose from our 4000K lamps for neutral-white light perfect for bathrooms, lobbies, hallways, entryways, and outdoor locations. Their >80 CRI and frosted lens deliver quality rendering to bring out vibrant colors and glare-free lighting, making them ideal for both residential and commercial applications. Dimmer switch compatibility and easy installation ensure ease-of-use in every upgrade project.

FEATURES

- Operation temperature: -4°F - 104°F
- Ignition time: ≤1.0 seconds
- Damp location rated
- Fits recessed cans with tension springs
- Module construction includes LED, lens and white trim
- Compatible with most 5" and 6" recessed housings



50,000
HOURS



EASY TO
INSTALL



DIMMABLE



BEAM
ANGLE




TRUE
COLOR



DAMP-RATED

COLOR TEMPERATURE

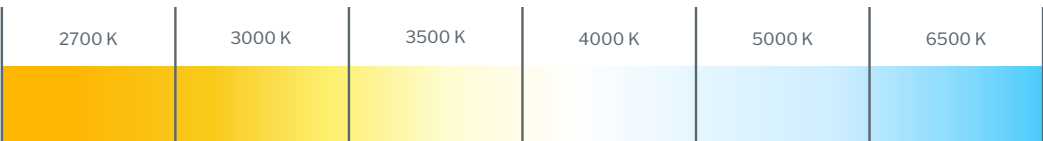

LIGHT TYPE	WARM WHITE 2700K-3000K	COOL WHITE/BRIGHT WHITE 3100 - 4500K	DAYLIGHT 5000K
Light Coloration	Hues ranging from orange to yellow-white	A more neutral white light may have a slightly blue tint	Blue-white light mimicking daylight
Ambiance Created	Cozy and inviting	Warm and welcoming	Crisp and invigorating
Ideal Rooms/Locations	Living rooms, kitchens, and bedrooms	Bathrooms, entryways, outdoors	Basements and garages
Ideal Applications	Table and floor lamps, pendants, and chandeliers	Vanities and overhead lighting	Task and security lighting



1701 Charleston Regional Parkway, Suite A
Charleston, SC 29492
(843) 971-1414
www.amconservation.com

SIMPLY CONSERVE®



LED Downlight Retrofit

L12-DL5/6-27K-D

L12-DL5/6-30K-D

L12-DL5/6-40K-D

SIMPLY CONSERVE®

Savings Start Here™



ORDERING INFORMATION

SOURCE	WATTAGE	LAMP TYPE	CCT
L = LED	12 = 12W	DL5/6 = Downlight, 5/6" recessed can	27 = 2700K 30 = 3000K 40 = 4000K

SPECIFICATIONS

MODEL #	INCAN. EQUIVALENT	WATTS	CCT	LUMENS	EFFICACY	VOLTAGE
L12-DL5/6-27K-D	65W-75W	12W	2700K	990	60 lm/W	120V
L12-DL5/6-30K-D	65W-75W	12W	3000K	990	60 lm/W	120V
L12-DL5/6-40K-D	65W-75W	12W	4000k	990	60 lm/W	120V

DIMENSIONS

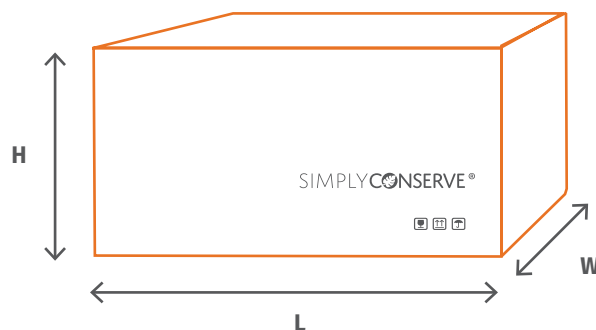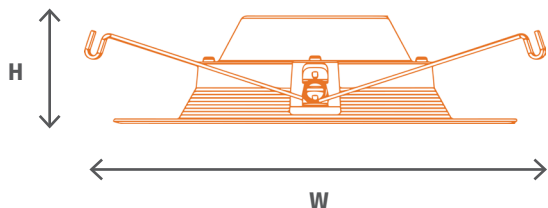

PRODUCT

MODEL #	H	W	BASE
L12-DL5/6-27K-D	1.97"	7.48"	E26
L12-DL5/6-30K-D	1.97"	7.48"	E26
L12-DL5/6-40K-D	1.97"	7.48"	E26

CASE

MODEL #	L	W	H	GROSS WEIGHT	CASE QTY.
L12-DL5/6-27K-D	16.3"	14"	9"	8.4 lbs.	12
L12-DL5/6-30K-D	16.3"	14"	9"	8.4 lbs.	12
L12-DL5/6-40K-D	16.3"	14"	9"	8.4 lbs.	12

5-YEAR LIMITED WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 5 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:
customer@amconservation.com

To learn more, please visit:
www.AMConservation.com