

Field-Adjustable Mini Wall Pack

L15/25-MWP-30/50-120/277-PC

OVERVIEW

Simply Conserve®'s Field-Adjustable Mini Wall Pack is a compact, high-efficiency lighting solution designed for both new installations and retrofits. Featuring on-unit dip switches, it allows for easy adjustment of wattage (15W, 20W, or 25W) and color temperature (3000K, 4000K, or 5000K) to meet project-specific needs. A built-in photocell with an optional bypass switch adds convenience and energy savings for dusk-to-dawn operation. With its durable, IP65-rated housing and sleek bronze finish, this wall pack is built to perform in demanding environments while maintaining a professional appearance.

FEATURES

- Integrated Photocell Control**
Includes a built-in photocell with an on/off toggle switch, offering automated dusk-to-dawn functionality when desired.
- Adjustable Energy Consumption & Color Temperature**
Dip switches allow field-selectable wattages (15W, 20W, or 25W) and correlated color temperatures (3000K, 4000K, 5000K) for tailored illumination.
- Built for Outdoor Durability**
IP65 wet-location rated and constructed with anti-corrosion, architectural bronze housing and a UV-stabilized polycarbonate lens.
- Long-Lasting Efficiency**
Delivers up to 120 LPW (lumens per watt) and is L70-rated for a 50,000-hour lifespan, reducing maintenance and energy costs.
- Compact, Easy-to-Install Design**
Slim profile (8.8" x 5.9" x 2.5") and versatile voltage range (120–277V) support seamless installation in tight or varied spaces.



SIMPLYCONSERVE®

COLOR TEMPERATURE	2500 K	2700 K	3000 K	3500 K	4000 K	5000 K	6500 K
LIGHT TYPE	WARM WHITE 2500 K - 2700K		COOL WHITE/BRIGHT WHITE 3000 - 4000K		DAYLIGHT 5000K+		
Light Coloration	Warmer color temperatures that highlight architectural elements		Cooler color temperatures that accent plants and provide good visibility		Cool white color temperatures that highlight details and create a modern look		
Lighting Examples:	Home facade lighting: Use 2500–2700K to highlight architectural elements		Landscape lighting: Use 3000–4000K to accent plants or provide security lighting		Moonlighting: Use 4000K down-lighting to mimic natural moonlight		
Ideal Rooms/Locations	Outdoor entertainment areas: Use warm white lighting to create an inviting atmosphere						



WET-
RATED



SELECTABLE
PHOTOCELL



EASY TO
INSTALL



FIELD
ADJUSTABLE



50,000
HOURS



1701 Charleston Regional Parkway, Suite A
Charleston, SC 29492
(843) 971-1414
www.amconservation.com

Field-Adjustable Mini Wall Pack

L15/25-MWP-30/50-120/277-PC

SIMPLYCONSERVE®

Savings Start Here™


ORDERING INFORMATION

SOURCE	WATTAGE	FIXTURE TYPE	CCT	VOLTAGE	OPTIONS
L = LED	15/25 = 15W, 20W, 25W	MWP = Mini Wall Pack	30/50 = 3000K 4000K, 5000K	120/277 = 120-277V	PC = Photocell

SPECIFICATIONS

MODEL #	WATTS	CCT	LUMENS	CRI	EFFICACY	VOLTAGE	DIM
L15/25-MWP-30/50-120/277-PC	15/20/25W	3000K/4000/5000K	1800/2400/3000K	≥80	120 LPW	120-277V	0-10V

DIMENSIONS

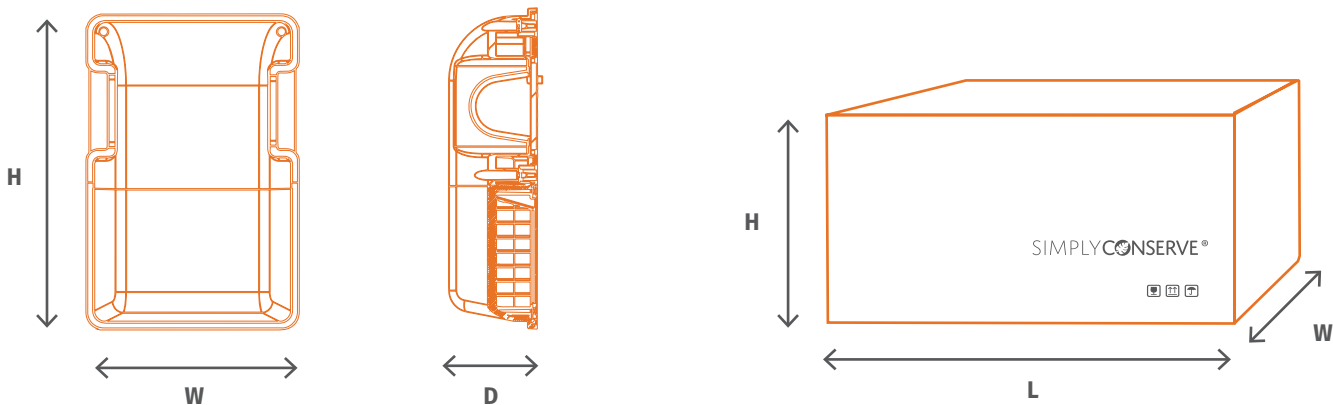

PRODUCT

MODEL #	L	W	H
L15/25-MWP-30/50-120/277-PC	9.0"	6.0"	3.0"

CASE

MODEL #	L	W	H	GROSS WEIGHT	CASE QTY.
L15/25-MWP-30/50-120/277-PC	19.0"	14.0"	10.0"	22.0 lbs.	12

5-YEAR LIMITED WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 5 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:
customercare@amconservation.com

To learn more, please visit:
www.AMConservation.com