

Field-Adjustable Parking Garage/Canopy LED

L40/70-PG10-30/50-120/277V-D-ADJ

OVERVIEW

The Simply Conserve® Field-Adjustable Parking Garage/Canopy LED is designed for versatility and fast installation. With onboard switches for adjusting input wattage and color temperature, this fixture delivers adaptable performance for a wide range of parking garage and canopy applications. Its durable construction and wet-location rating ensure reliable operation in demanding environments.

FEATURES

- Versatile Installation**
 Designed to fit seamlessly into both retrofit upgrades and new construction projects.
- Adjustable Wattage & CCT**
 Field-selectable power consumption and color temperature provide flexible performance for a variety of applications.
- Long-Lasting Performance**
 An L70-rated 50,000-hour lifetime for commercial environments.
- Controlled, Even Illumination**
 0-10V dimming and a wide 155° beam angle work together to deliver smooth, uniform lighting across large areas.
- Built for Tough Environments**
 Wet-location and IP65 protection ensure reliable performance in exposed or demanding areas.



50,000 HOURS



EASY TO INSTALL




FIELD ADJUSTABLE



WET RATED

COLOR TEMPERATURE

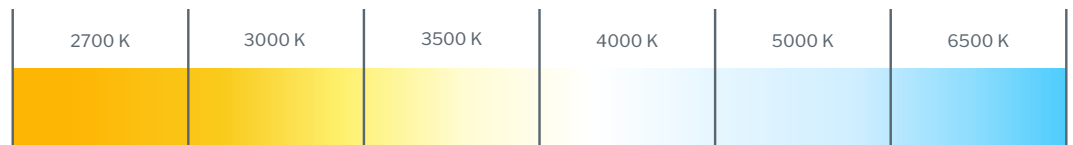

LIGHT TYPE	WARM WHITE 2700K-3000K	COOL WHITE/BRIGHT WHITE 3100 - 4500K	DAYLIGHT 5000K
Light Coloration	Hues ranging from orange to yellow-white	A more neutral white light may have a slightly blue tint	Blue-white light mimicking daylight
Ambiance Created	Cozy and inviting	Warm and welcoming	Crisp and invigorating
Ideal Rooms/Locations	Living rooms, kitchens, and bedrooms	Bathrooms, entryways, outdoors	Basements and garages
Ideal Applications	Table and floor lamps, pendants, and chandeliers	Vanities and overhead lighting	Task and security lighting



SIMPLY CONSERVE®



1701 Charleston Regional Parkway, Suite A
 Charleston, SC 29492
 (843) 971-1414
www.amconservation.com

Field-Adjustable Parking Garage/Canopy LED

L40/70-PG10-30/50-120/277V-D-ADJ

SIMPLY CONSERVE®

Savings Start Here™


ORDERING INFORMATION

SOURCE	WATTAGE	LAMP TYPE	SIZE	CCT	OPTIONS
L = LED	40/70 = 40W, 60W, 70W	PG = Parking Garage	10 = 10"	30/50 = 3000K, 4000K, 5000K	D = 0-10v Dimming ADJ = Field-Adjustable

SPECIFICATIONS

MODEL #	WATTS	CCT	LUMENS	CRI	EFFICACY	VOLTAGE	DIM
L40/70-PG10-30/50-120/277V-D-ADJ	40/60/70W	3000/4000/5000K	4800/7200/8400	≥80	120 LPW	120V-277V	0-10V

DIMENSIONS

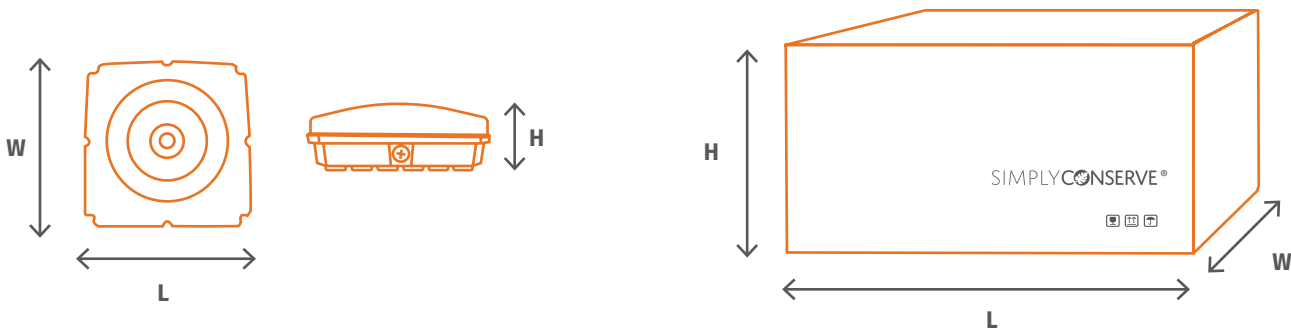

PRODUCT

MODEL #	L	W	H
L40/70-PG10-30/50-120/277V-D-ADJ	10.1"	10.1"	4.2"

CASE

MODEL #	L	W	H	GROSS WEIGHT	CASE QTY.
L40/70-PG10-30/50-120/277V-D-ADJ	23.0"	13.0"	12.5"	28.3 lbs	4

5-YEAR LIMITED WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 5 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:
customercare@amconservation.com

To learn more, please visit:
www.AMConservation.com