

Field-Adjustable Commercial Downlight

L7/18-DL6-30/40-D-ADJ, L10/22-DL8-30/40-D-ADJ

OVERVIEW

The Simply Conserve® Field-Adjustable Commercial Downlight features selectable input power, lumen output, and 3000k, 3500k, or 4000k color temperatures. Its 90+ CRI and frosted lens allow for glare-free, true color rendering producing vivid colors throughout-making the downlight ideal for commercial use in retail spaces, hospitals, offices, and airports. Designed for easy installation in new construction, remodel, and retrofit projects. Features include: 0-10V dimming, 3CCT selectable, 3 wattage selection, wet rated, JA certification, and IC rating.

FEATURES

- **Perfect For Any Project Type**
Ideal for retrofit or new construction installations
- **Stylish Features**
Matte white smooth trim finish with spring-loaded retention clips
- **Suitable For All Your Lighting Needs**
Wet location-, IC- and airtight-rated
- **Customize Your Lighting**
field adjustable power, lumens, and color temperatures



50,000
HOURS



DAMP-
RATED



FIELD
ADJUSTABLE




IC-
RATED



BEAM
ANGLE

COLOR TEMPERATURE

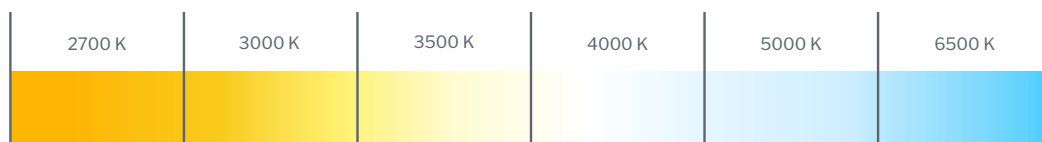

| LIGHT TYPE | WARM WHITE 2700K-3000K | COOL WHITE/BRIGHT WHITE 3100 - 4500K | DAYLIGHT 5000K |
|-----------------------|--|--|-------------------------------------|
| Light Coloration | Hues ranging from orange to yellow-white | A more neutral white light may have a slightly blue tint | Blue-white light mimicking daylight |
| Ambiance Created | Cozy and inviting | Warm and welcoming | Crisp and invigorating |
| Ideal Rooms/Locations | Living rooms, kitchens, and bedrooms | Bathrooms, entryways, outdoors | Basements and garages |
| Ideal Applications | Table and floor lamps, pendants, and chandeliers | Vanities and overhead lighting | Task and security lighting |

ORDERING INFORMATION

| SOURCE | WATTAGE | LAMP TYPE | SIZE | CCT | INCL. OPTIONS |
|---------|--|----------------|--------------------------|---------------------------|----------------------------------|
| L = LED | 7/18 = 7W/10W/18W 10/22 = 10W/15W/22W | DL = Downlight | 6 = 6 Inch 8 = 8 Inch | 30K/35K/40K Adjustable | D = Dimmable ADJ = Adjustable |

*See ballast compatibility chart at www.AMConservation.com



SIMPLY CONSERVE®



1701 Charleston Regional Parkway, Suite A
Charleston, SC 29492
(843) 971-1414
www.AMConservation.com

Field-Adjustable Commercial Downlight

L7/18-DL6-30/40-D-ADJ, L10/22-DL8-30/40-D-ADJ





SIMPLYCONSERVE®



Savings Start Here™

SPECIFICATIONS

| MODEL # | WATTS | CCT | LUMENS | CRI | VOLTAGE |
|------------------------|-----------|-------------|----------------|-----|----------|
| L7/18-DL6-30/40-D-ADJ | 7/10/18W | 30K/35K/40K | 700/1000/1500 | ≥90 | 120-277V |
| L10/22-DL8-30/40-D-ADJ | 10/15/22W | 30K/35K/40K | 1000/1500/2000 | ≥90 | 120-277V |

ACCESSORIES

| MODEL # | DESCRIPTION | SIZE | IMAGE |
|-----------|----------------|------------|--|
| LDL-JOIST | 700/1000/1500 | 6"/8"/9.5" |  |
| LDL-TGRID | 1000/1500/2000 | 6"/8"/9.5" |  |
| LDL-GR6 | 1000/1500/2000 | 6" |  |
| LDL-GR8 | 1000/1500/2000 | 8" |  |

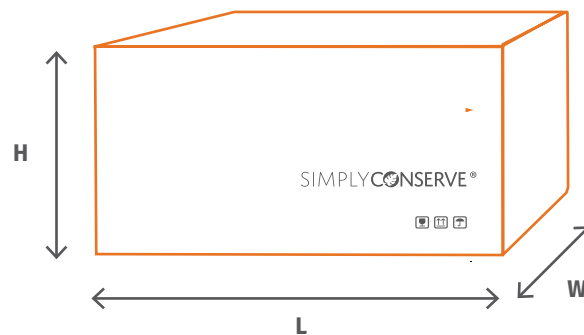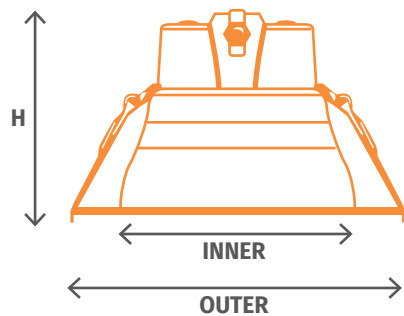

PRODUCT

| MODEL # | H | INNER | OUTER |
|------------------------|--------|--------|---------|
| L7/18-DL6-30/40-D-ADJ | 5 1/8" | 6 1/4" | 8 1/4" |
| L10/22-DL8-30/40-D-ADJ | 5 7/8" | 7 7/8" | 10 1/4" |

CASE

| MODEL # | L | W | H | GROSS WEIGHT | CASE QTY |
|------------------------|--------|--------|--------|--------------|----------|
| L7/18-DL6-30/40-D-ADJ | 17.64" | 9.05" | 12.68" | 6.6 lbs. | 4 |
| L10/22-DL8-30/40-D-ADJ | 21.58" | 11.02" | 14.09" | 7.7 lbs. | 4 |

5-YEAR LIMITED WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 5 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:
customer@amconservation.com

To learn more, please visit:
www.AMConservation.com