

Field-Adjustable Commercial Flat Panel

L25/40-FP22-35/50-D-ADJ

L40/50-FP24-35/50-D-ADJ

OVERVIEW

Our DLC-certified LED flat panels are designed for recessed, surface, or suspended ceiling grid installation, making them an ideal solution for replacing inefficient traditional fluorescent fixtures. They produce an even, bright light suitable for commercial settings including office buildings, schools, hospitals and more. Their minimalist design allows them to integrate seamlessly, offering high-quality, reliable lighting.

FEATURES

- **Field-adjustable wattage and CCT**
Whether it's a space-use change or a task change, selectable output and CCT are built-in for a 9-in-1 fixture solution.
- **Instant Ignition**
Illuminates the moment the panel is energized. No CFL-like pre-heat delays.
- **Damp Location Rated**
UL listed for installation in damp location applications.
- **0-10V Dimmable**
Fixture is pre-wired to accept 0-10V dimming controls.
- **Sensor and Emergency Wiring Provisions**
Easily add sensors and/or emergency ballast equipment in the field with provided knock-outs in wiring compartment.



FIELD
ADJUSTABLE



50,000
HOURS



TRUE
COLOR



FLICKER-
FREE

ORDERING INFORMATION

MODEL #	SOURCE	WATTAGE	FIXTURE TYPE	PANEL SIZE	CCT	INC. OPTIONS
L25/40-FP22-35/50-D-ADJ	L = LED	25/40 = 25W, 30W, 40W	FP = Flat Panel	22 = 2' x 2'	35/50 = 3500K, 4000K, 5000K	D = Dimmable ADJ = Adjustable
L40/50-FP24-35/50-D-ADJ		40/50 = 40W, 45W, 50W		24 = 2' x 4'		



1701 Charleston Regional Parkway, Suite A
Charleston, SC 29492
(843) 971-1414
www.amconservation.com

Field-Adjustable Commercial Flat Panel

L25/40-FP22-35/50-D-ADJ

L40/50-FP24-35/50-D-ADJ

SIMPLYCONSERVE®

Savings Start Here™


SPECIFICATIONS

MODEL #	DIMMING	EFFICACY	LUMENS	CRI	VOLTAGE
L25/40-FP22-35/50-D-ADJ	0-10V	125 LPW	3125/3750/5000	≥80	120-277V
L25/40-FP22-35/50-D-ADJ	0-10V	125 LPW	5000/5625/6250	≥80	120-277V

PHOTOMETRICS

L40/50-FP24-35/50-D-ADJ



Coefficients of Utilization - Zonal Cavity method
Effective Floor Cavity Reflectance 0.20



ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%
0-30	1,755.26	26.6%
0-40	2,884.03	43.7%
0-60	5,138.83	77.9%
0-80	6,470.65	97.4%
0-90	6,632.11	99.8%

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	99	95	106	101	97	93	97	93	90	93	90	88	89	87	85	83
2	98	90	83	77	96	88	81	76	84	79	74	81	76	72	78	74	71	68
3	89	79	70	64	87	88	69	63	74	67	62	71	66	61	69	64	60	57
4	82	70	61	54	79	68	60	53	66	58	53	63	57	52	61	56	51	49
5	75	62	53	46	73	61	52	46	59	51	45	57	50	45	55	49	44	42
6	69	56	47	40	67	55	46	40	53	45	40	51	44	39	50	44	39	37
7	64	51	42	35	62	50	41	35	48	41	35	47	40	35	45	39	34	32
8	60	46	37	32	58	45	37	31	44	37	31	43	36	31	42	35	31	29
9	56	42	34	28	54	42	34	28	40	33	28	39	33	28	38	32	28	26
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	36	30	25	23

DIMENSIONS

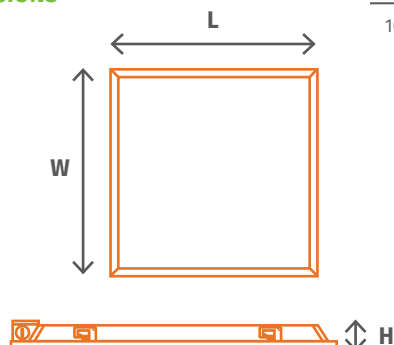

PRODUCT

MODEL #	L	W	H
L25/40-FP22-35/50-D-ADJ	23.7"	23.7"	1.6"
L40/50-FP24-35/50-D-ADJ	47.7"	23.7"	1.6"

CASE

MODEL #	L	W	H	GROSS WEIGHT	CASE QTY.
L25/40-FP22-35/50-D-ADJ	25.2"	25.2"	4.9"	9.3 lbs.	2
L40/50-FP24-35/50-D-ADJ	48.8"	25.2"	4.9"	17.9 lbs.	2

5-YEAR LIMITED WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 5 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:
customer@amconservation.com

To learn more, please visit:
www.amconservation.com