

OVERVIEW

The LED T5 bypass eliminates the need for a ballast, making it a quick and efficient solution for your lighting needs. With an even and flicker-free light output, this lamp is the ideal replacement for 54-watt T5HO fluorescent tubes in commercial spaces. Its 50,000-hour rated lifespan and easy installation eliminate the hassle of complicated upgrades.



KEY FEATURES

- Comply with UL1993/UL8750
- 120/277VAC 60Hz, double-end live feed, direct wire
- Easily retrofit 54-watt T5HO fluorescent tubes
- Direct wire without modifying lamp holders



BEAM  
ANGLE



50,000  
HOURS



EASY TO  
INSTALL



FLICKER-  
FREE



TRUE  
COLOR



ORDERING INFORMATION


CATALOG #	SOURCE	WATTAGE	LAMP TYPE	CCT
L25T5G40BDE	L = LED Linear	25 = 25W	T5 = T5 Tube	40 = 4000K
L25T5G50BDE	L = LED Linear	25 = 25W	T5 = T5 Tube	50 = 5000K

SPECIFICATIONS


CATALOG #	WATTS	CCT	LUMENS	EFFICACY	CRI	VOLTAGE	DIM
L25T5G40BDE	25W	4000K	3500	140 LPW	>80	120-277V	No
L25T5G50BDE	25W	5000K	3500	140 LPW	>80	120-277V	No

DIMENSIONS

PRODUCT

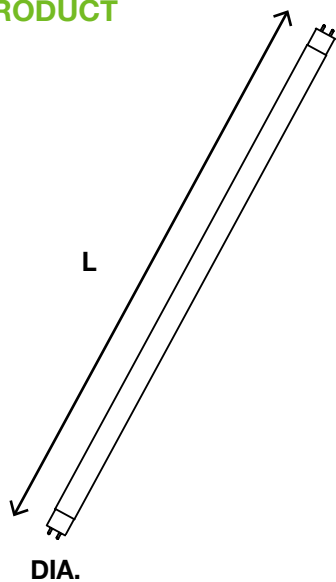

PACKAGING

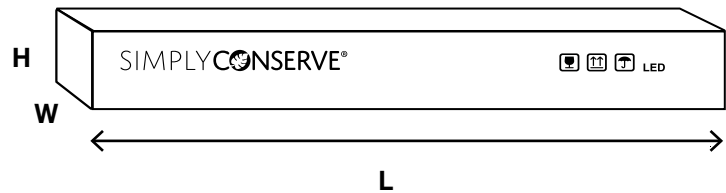

CATALOG #	L	DIA.
L25T5G40BDE	45.8"	0.7"
L25T5G50BDE	45.8"	0.7"

CATALOG #	L	W	H	CASE QTY	GROSS WT
L25T5G40BDE	47"	4"	4.25"	25	10.85 lbs
L25T5G50BDE	47"	5"	4.5"	25	10.85 lbs

5-Year Limited Warranty



AM Conservation guarantees to the original purchaser or recipient of this lamp that it is free from defects in material and workmanship for five years from the date of purchase. Warranty is limited to repair or replacement of the lamp. Lamps being returned must include proof of purchase.

For warranty claims, please contact:

customercare@amconservation.com

To learn more, please visit:

www.amconservation.com