

# LED ADJUSTABLE VAPOR-TIGHT

L30/50-VPR4-35/50-120/277V-D-ADJ

## OVERVIEW

Simply Conserve's field-adjustable vapor-tight fixture includes two switches on the unit which allow for adjustment of the input power and color temperature. This fixture's durable construction allows it to be installed in a variety of demanding environments where moisture and foreign debris need to be mitigated. The IP66 rating also allows for it to be cleaned with hose-directed water.



**MOUNTING HARDWARE**  
(Included)

## KEY FEATURES

- Field-adjustable lumen and CCT
- For retrofit or new construction installation
- Wet Location, IP66-rated
- L70-rated lifetime of 50,000 hours
- 0-10V dimmable
- 120° beam angle
- Operating temperature: -4°F ~ 113°F



FIELD-ADJUSTABLE



EASY TO INSTALL



50,000 HOURS



WET-RATED



DIMMABLE



Intertek



## ORDERING INFORMATION


SOURCE	WATTAGE	FIXTURE TYPE	SIZE	CCT	OPTIONS
L = LED	30/50 = 30W, 40W, 50W	VPR = Vapor Tight	4 = 4ft	30/50 = 3000K, 4000K, 5000K	D = 0-10V Dimming ADJ = Field-Adjustable

## SPECIFICATIONS

CATALOG #	WATTS	CCT	LUMENS	EFFICACY	CRI	VOLTAGE	DIM
L30/50-VPR4-35/50-120/277V-DADJ	30/40/50W	3500/4000/5000K	4200/5600/7000	140 LPW	>80	120-277V	0-10V

## DIMENSIONS

### PRODUCT

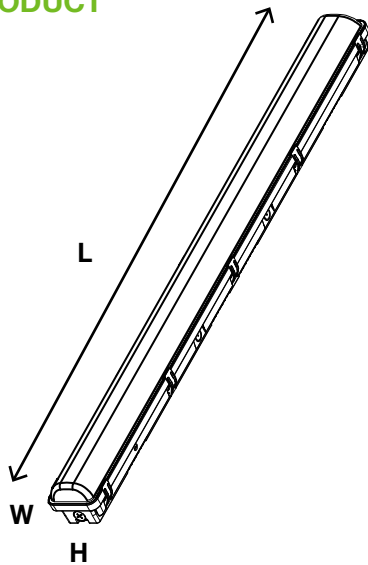

### PACKAGING



CATALOG #	L	W	H
L30/50-VPR4-35/50-120/277V-DADJ	47.2"	4.3"	3.5"

CATALOG #	L	W	H	CASE QTY	GROSS WT
L30/50-VPR4-35/50-120/277V-DADJ	49.3"	19.9"	9.3"	8	25.8 lbs

### 5-Year Limited Warranty



AM Conservation warrants this product to be free from manufacturing defects for a period of five years from the date of consumer purchase or distribution by an energy conservation program, and has been properly operated, AM Conservation will replace the LED Adjustable Vapor Tight free of charge.

### For warranty claims, please contact:

customercare@amconservation.com

### To learn more, please visit:

www.amconservation.com