

**L35TF2240D, L35TF2250D,
L34TF2440D, L34TF2450D**

OVERVIEW

Our DLC-certified LED troffers are designed for installation in T-bar grid or drop-in ceilings. They are the ideal solution for replacing inefficient traditional fluorescent troffers. They produce an even, bright light ideal for commercial settings including office buildings, schools, hospitals and more. Their attractive design allows them to integrate seamlessly into any setting, offering high-quality, reliable lighting.

Catalog #		Type
Project		Date
Comments		
Prepared by		

KEY FEATURES

- Operation temperature: -4°F - 104°
- Ignition time: Instant-on
- Dimmable: 0-10V
- Suitable for use in damp locations
- Hanging chain and linking hardware included
- Center basket design provides advanced light distribution with architectural styling
- Fits standard 1" "T-bar" grids
- High efficacy, excellent color rendering and low glare



BEAM
ANGLE



50,000
HOURS



FLICKER-
FREE



TRUE
COLOR



ORDERING INFORMATION

SOURCE	WATTAGE	LAMP TYPE	PRODUCT SIZE	CCT	DIMMABLE
L = LED	34 = 34W 35 = 35W	TF = Troffer	22 = 2' x 2' 24 = 2' x 4'	40 = 4000K 50 = 5000K	D = Dimmable


*See photometric information chart at www.amconservationgroup.com

SPECIFICATIONS


CATALOG #	WATTS	CCT	LM	EFFICACY	VOLTAGE	POWER FACTOR	LINE FREQUENCY	CRI	THD
L35TF2240D	35W	4000K	4375	125 lm/W	120-277V	≥0.9	60 Hz	≥80	6.48%
L35TF2250D	35W	5000K	4375	125 lm/W	120-277V	≥0.9	60 Hz	≥80	6.48%
L34TF2440D	34W	4000K	4250	125 lm/W	120-277V	≥0.9	60 Hz	≥80	6.48%
L34TF2450D	34W	5000K	4250	125 lm/W	120-277V	≥0.9	60 Hz	≥80	6.48%

DIMENSIONS

PRODUCT

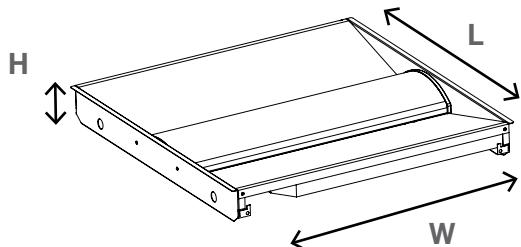

CASE

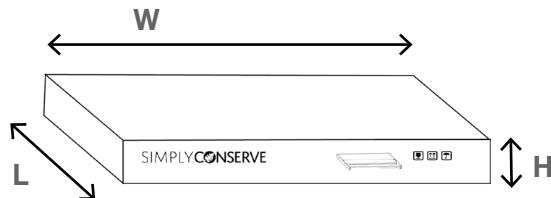

CATALOG #	L	W	H
L35TF2240D	23 25/32"	23 25/32"	2 3/4"
L35TF2250D	23 25/32"	23 25/32"	2 3/4"
L34TF2440D	23 25/32"	47 3/4"	2 3/4"
L34TF2450D	23 25/32"	47 3/4"	2 3/4"

CATALOG #	L	W	H	CASE QTY	GROSS WT
L35TF2240D	24 51/64"	25 19/32"	3 1/32"	1	11.4 lb.
L35TF2250D	24 51/64"	25 19/32"	3 1/32"	1	11.4 lb.
L34TF2440D	24 51/64"	49 1/4"	3 1/32"	1	17.8 lb.
L34TF2450D	24 51/64"	49 1/4"	3 1/32"	1	17.8 lb.

5-Year Limited Warranty



If this troffer fails to operate for a 5-year period under normal consumer use (6 hours/day, 7 days/week), from the date of purchase or distribution by an energy conservation program and has been properly installed, AM Conservation Group will replace the lamp free of charge.

For warranty claims, please contact:

customercare@amconservationgroup.com

To learn more, please visit:

www.amconservationgroup.com