

SIMPLYCONSERVE

2X2 EDGE LIT LED FLAT PANEL

L40FP2240D - L40FP2250D SERIES



The Simply Conserve Edge Lit LED Panel produces an even and efficient light, making it the perfect energy-efficient replacement for fluorescent fixtures. The panels are fully dimmable, creating the opportunity for significant savings in commercial and industrial environments including schools, office buildings and hospitals. Facilities are encouraged to utilize utility rebate programs with these DLC-listed models.



PRODUCT FEATURES OVERVIEW



BEAM ANGLE



50,000 HOURS



EASY TO INSTALL



FLICKER FREE



TRUE COLOR



5-YEAR LIMITED WARRANTY*

*AM Conservation Group, Inc. guarantees to the original purchaser or recipient of this lamp that it is free from defects in material and workmanship for five years from the date of purchase. Warranty is limited to repair or replacement of the lamp. Lamps being returned must include proof of purchase.

Rated Power (W):	40W
Color Temp (CCT):	4000K, 5000K
Typical Lumens (lm):	4000 lm
Efficacy (lm/w):	100 lm/w @4000K-5000K
Beam Angle:	110°
Operation Temperature:	-20°C to 40°C
Storage Temperature:	-20°C to 40°C
Input Voltage (V):	120-277V
Power Factor:	>0.9
THD:	10.79%
Ignition Time:	Instant On
Line Frequency:	60 Hz
Dimmable:	Yes (0-10V)
Safety Certification:	ETL
DLC Listed:	Yes

- Over 130 lumens / watt
- No UV or IR radiation
- Even light distribution with no dark spots
- Indoor damp rated
- Fixture includes hanging earth quake clips to suspend from drop ceiling frame or wires
- This product is rated for indoor use only

2X2 EDGE LIT LED FLAT PANEL | L40FP2240D - L40FP2250D SERIES

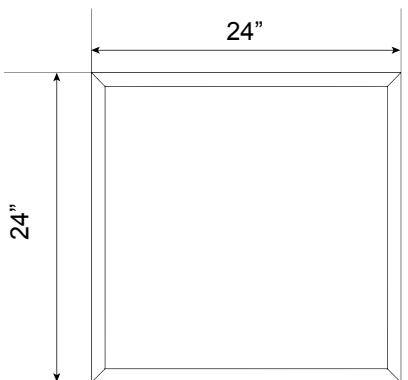
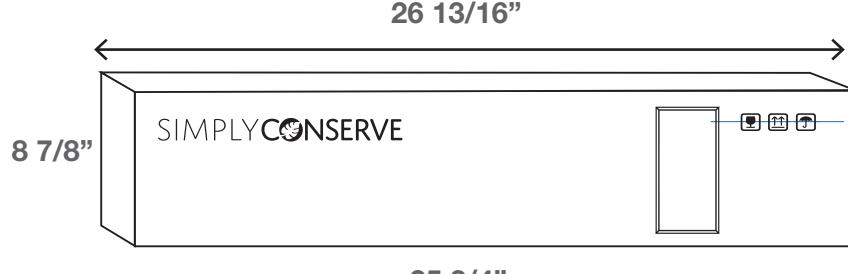
SPECIFICATIONS BY MODEL

ITEM #	DIMENSIONS	WATTS	CASE QT	CCT	LUMENS	CRI	VOLT	LIFETIME	DLC LISTED
L40FP2240D	2' x 2'	40W	4	4000K	4000	>80	120-277v	50,000 Hrs.	Yes
L40FP2250D	2' x 2'	40W	4	5000K	4000	>80	120-277v	50,000 Hrs.	Yes

MODEL SELECTION

FAMILY	WATTAGE	TYPE	SIZE	CCT.	OPERATION
L = LED	40 = 40W 50 = 50W	FP = Flat Panel	22 = 2FT x 2FT 24 = 2FT x 4FT	35 = 3500K 40 = 4000K 50 = 5000K	D = Dimmable

DIMENSIONS

PRODUCT	PACKAGING
	<p>Case</p>  <p>26 13/16"</p> <p>8 7/8"</p> <p>25 3/4"</p> <p>4/Master Case.</p> <p>Net WT: 7 LBS Gross WT: 8 LBS</p>