

LED Adjustable Vapor-Tight

L30/50-VPR4-35/50-120/277V-D-ADJ



OVERVIEW

Simply Conserve®'s LED Adjustable Vapor-Tight fixture is designed for versatility and durability in demanding environments. Integrated field-adjustable switches allow installers to easily set both wattage and color temperature on-site, improving installation flexibility. Built with a rugged, sealed housing, this fixture is ideal for locations where moisture, dust, dirt, and other contaminants are present. Its IP66 rating enables safe, washdown cleaning making it a reliable lighting solution for wet and industrial applications.

FEATURES

• Field-Adjustable Performance

Integrated switches allow on-site adjustment of lumen output and color temperature.

• Built for Demanding Environments

The durable vapor-tight construction and IP66 wet-location rating protect against moisture and airborne debris, ensuring long-term performance in harsh conditions.

• Long-Lasting Efficiency

With an L70 rated lifetime of 50,000 hours and high efficacy performance, this fixture delivers reliable illumination while minimizing maintenance and energy costs.

• Installation Flexibility

Designed for both retrofit and new construction projects, the fixture includes mounting hardware for straightforward installation across a wide range of applications.

• Dimming and Control Ready

0-10V dimming capability provides smooth, consistent light control, supporting energy savings and occupant comfort.

• Wide and Reliable Light Distribution

A 120° beam angle ensures uniform illumination, while a wide operating temperature range allows dependable performance in both cold and warm environments.



FIELD-
ADJUSTABLE



EASY TO
INSTALL



50,000
HOURS



WET-
RATED



DIMMABLE

COLOR TEMPERATURE



LIGHT TYPE	WARM WHITE 2700K-3000K	COOL WHITE/BRIGHT WHITE 3100 - 4500K	DAYLIGHT 5000K
------------	---------------------------	---	-------------------

Light Coloration

Hues ranging from orange to yellow-white

A more neutral white light may have a slightly blue tint

Blue-white light mimicking daylight



LED Adjustable Vapor-Tight

L30/50-VPR4-35/50-120/277V-D-ADJ

SIMPLYCONSERVE®

Savings Start Here™


ORDERING INFORMATION

SOURCE	WATTAGE	Fixture Type	CCT	SIZE	INCL. OPTIONS
L = LED	30/40/50W	VPR = Vapor Tight	30/50 = 3000K, 4000K, 5000K	4FT = 4' Nominal	D = 0-10V Dimming ADJ = Field-Adjustable

SPECIFICATIONS

MODEL #	WATTS	CCT	LUMENS	EFFICACY	CRI	VOLTAGE	DIM
L30/50-VPR4-35/50-120/277V-D-ADJ	30/40/50W	35/40/50K	4200/5600/7000	140 LPW	≥80	120-277V	0-10V

DIMENSIONS

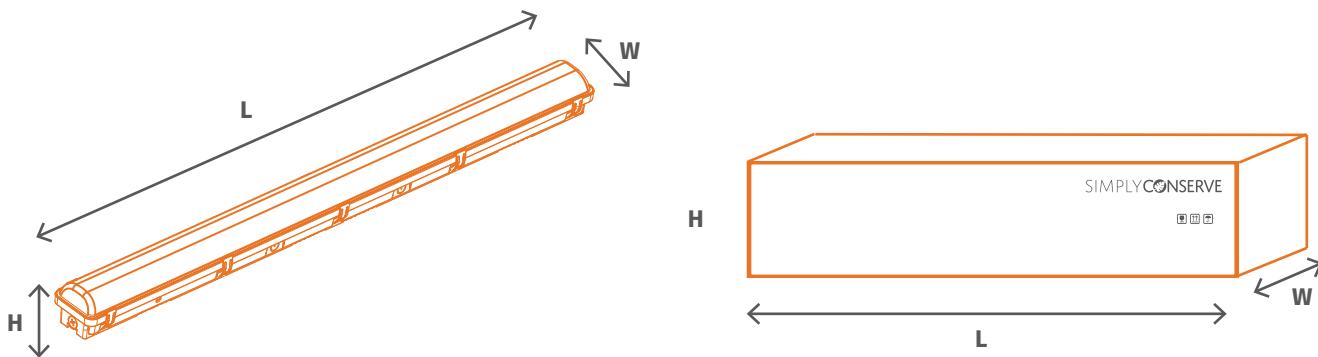

PRODUCT

MODEL #	L	W	H
L30/50-VPR4-35/50-120/277V-D-ADJ	48.8"	4.9"	4.3"

CASE

MODEL #	L	W	H	GROSS WEIGHT	CASE QTY
L30/50-VPR4-35/50-120/277V-D-ADJ	49.3"	19.9"	4"	25.9 lbs.	8

5-YEAR LIMITED LIFETIME WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 5 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:
customercare@amconservation.com

To learn more, please visit:
www.AMConservation.com