

# Earth® Luxe Single Handle Bathroom Faucet

N-SLSA-LF12-CH-50-US

N-SLSA-LF12-BN-50-US

## OVERVIEW

Quality and style meet efficiency™. Niagara Conservation's Earth® Luxe Single-Handle Bathroom Faucet boasts design to match any décor, premium components, easy installation, and WaterSense certification to comfortably and conveniently reduce water and energy use. Enjoy smooth, drip-free water control through the unit's ceramic cartridge and sculpted metal handle. Cut installation times in half with convenient, tool-free quick connects and pre-attached braided nylon supply lines. The Earth Luxe Single-Handle Bathroom Faucet is the easy choice for quality, performance, and savings.

## FEATURES

- **Save 45% More Water Without Sacrificing Performance\***  
WaterSense-certified to comfortably and conveniently reduce water and energy use.
- **Quick and Easy Installation** Pre-attached braided supply lines and quick connects for fast faucet replacements.
- **Smooth and Precise Water Control** Generously sized metal lever and durable ceramic cartridge for silky, drip-free operation.
- **Long Lasting Drain Assembly** Hybrid pop-up drain with metal components ensures sink basin remains watertight.
- **Limited Lifetime Warranty** Free repair or replacement of manufacturing defects for product's lifespan (restrictions apply)

## SPECIFICATIONS

MODEL #	DESCRIPTION	BODY TYPE	FINISH
N-SLSA-LF12-CH-50-US	Bathroom Faucet	Earth® Luxe Single Handle	Chrome
N-SLSA-LF12-BN-50-US	Bathroom Faucet	Earth® Luxe Single Handle	Brushed Nickel

\*Niagara Conservation Earth® Single Lever Bathroom Faucet flow rate (1.2 GPM) vs. federal standard maximum flow rate (2.2 GPM) for lavatory faucets



NIAGARA  
CONSERVATION®



Certified by  
IAPMO R&T  
Certified to ASME  
A112.18.1 / CSA B125.1

095-0097-02-00



1701 Charleston Regional Parkway, Suite A  
Charleston, SC 29492  
(843) 971-1414  
www.amconservation.com

# Earth® Luxe Single Handle Bathroom Faucet

N-SLSA-LF12-CH-50-US

N-SLSA-LF12-BN-50-US






Quality And Style Meets Efficiency

## SPECIFICATIONS

MODEL #	INSTALLATION	FLOW RATE	SUPPLY LINES INCLUDED	CARTRIDGE TYPE	TOOL-FREE QUICK CONNECT INCLUDED
N-SLSA-LF12-CH-50-US	4" center set for 3-hole installation	1.2 GPM*	Yes, 30" braided nylon	Ceramic	Yes
N-SLSA-LF12-BN-50-US	4" center set for 3-hole installation	1.2 GPM*	Yes, 30" braided nylon	Ceramic	Yes

\*Max Flow Rate: 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa

## DIMENSIONS

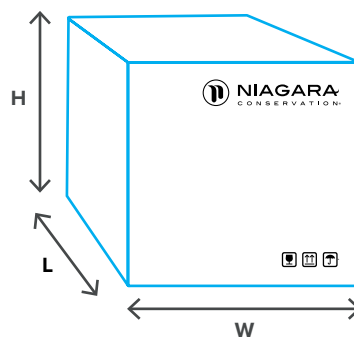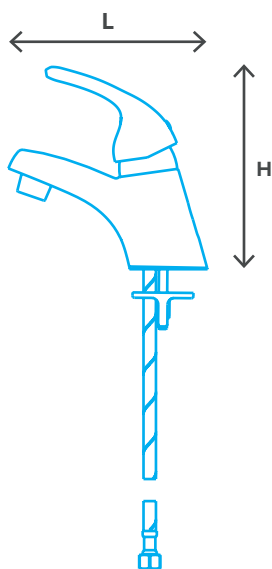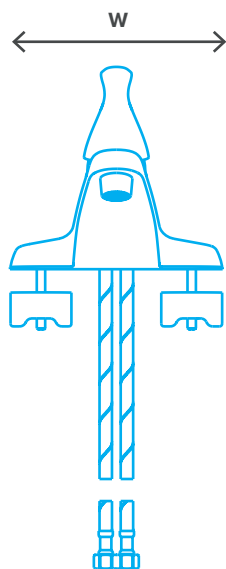

## PRODUCT

MODEL #	L	W	H
N-SLSA-LF12-CH-50-US	5.9"	6.3"	6"
N-SLSA-LF12-BN-50-US	5.9"	6.3"	6"

## CASE

MODEL #	L	W	H	CASE QTY.	GROSS WT.
N-SLSA-LF12-CH-50-US	14.8"	9.7"	15.7"	6	7.9 lb
N-SLSA-LF12-BN-50-US	14.8"	9.7"	15.7"	6	7.9 lb

## LIMITED LIFETIME WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for the lifetime of the product from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit [amconservation.com/warranties](http://amconservation.com/warranties).

For warranty claims, please contact:  
[customercare@amconservation.com](mailto:customercare@amconservation.com)

To learn more, please visit:  
[www.amconservation.com](http://www.amconservation.com)

