

PRE-RINSE SPRAY VALVE

N2180-0.68

OVERVIEW

Niagara Conservation's pre-rinse spray valve produces a vigorous spray pattern that offers high performance and water-saving efficiencies. The rinser uses only 0.68 GPM and is certified by the Food Services Technology Center.

KEY FEATURES

- Solid brass fitting prevents leaks
- Simple equipment-free installation
- Vigorous spray pattern offers high performance
- Always-on handle clip enables constant flow
- Protective full-surround dish guard bumper prevents damage to sprayer or dishes
- Flow rate 0.68 gallons per minute
- Certifications: ASME A112.18.1 / CSA B125.1





SPECIFICATIONS

MODEL #	FINISH	COLOR	FLOW RATE
N2180-0.68	Chrome	Green	0.68 GPM







PRE-RINSE SPRAY VALVE

N2180-0.68

DIMENSIONS

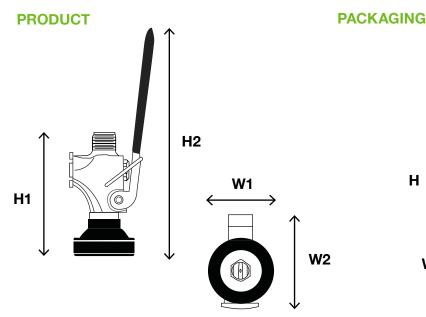



CATALOG #	H1	H2	W1	W2
N2180-0.68	3.25"	7.5"	2.0"	2.5"

CATALOG #	L	W	Н	CASE QTY.	GROSS WT.
N2180-0.68	12.5"	8.6"	12.3"	20	28.05 lbs

1-Year Limited Warranty



AM Conservation guarantees to the original purchaser or recipient of a spray valve that it is free from defects in material and workmanship for a period of 1 year. AM Conservation will at our choice replace any part of the spray valve which is in our opinion defective provided that the product has not been abused, misused, altered, or damaged after its purchase. This includes damage due to the use of tools or harsh chemicals. In the event a product has been discontinued, AM Conservation will replace it with what we determine to be the closest product. AM Conservation is not responsible for labor charges, installation, or other consequential cost. AM Conservation's responsibility shall not exceed the original cost of the product.

For warranty claims, please contact:

customercare@amconservation.com

To learn more, please visit:

www.amconservation.com

