

OVERVIEW


Our closed-cell polyethylene hot water pipe insulation is used to insulate both residential and commercial hot water, non-steam pipes, improving thermal efficiency. Insulating hot water pipes reduces heat loss and can raise water temperature 2°F - 4°F while preventing freezing and sweating. Our pipe insulation provides excellent resistance to water and water vapor. The insulation is flexible and easy to install.

SPECIFICATIONS


MODEL #	R VALUE
PI010	3.54
PI011	3.15
PI016	5.07
PI018	5.70



DIMENSIONS

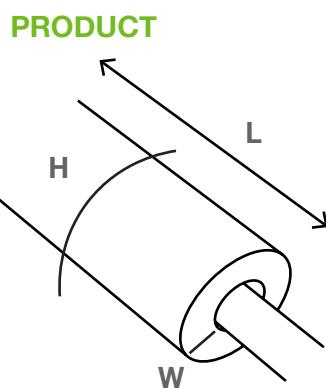

PACKAGING

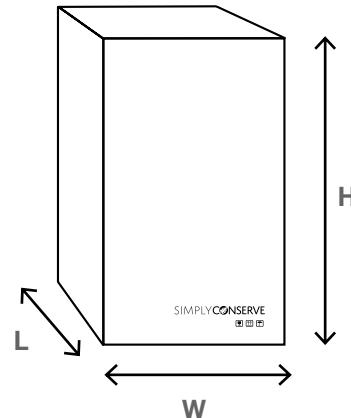

MODEL #	L	W	H
PI010	3'	0.5"	1.5"
PI011	3'	0.5"	2.0"
PI016	3'	0.75"	2.5"
PI018	3'	0.75"	2.25"

MODEL #	L	W	H	CASE QTY	GROSS WT
PI010	11.6"	11.6"	37"	129'/case; 43 3' pcs	3.45 lbs
PI011	11.6"	11.6"	37"	84'/case; 28 3' pcs	3.05 lbs
PI016	11.6"	11.6"	37"	51'/case; 17 3' pcs	3.50 lbs
PI018	11.6"	11.6"	37"	72'/case; 24 3' pcs	4.10 lbs

5-Year Limited Warranty



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 5 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:

customerservice@amconservation.com

To learn more, please visit:

www.amconservation.com