

ShowerStart® Express Tub Spout

EV3301-CP000-CT

EV3301-BN000-CT

EV3301-MB000-CT

OVERVIEW

Preheat your shower up to 3X faster and save up to 11 gallons per shower by installing this innovative, thermostatic tub spout in your tub/shower combination bathroom. It works by performing a high-speed purge of the shower's initial cold water through the tub spout, automatically redirecting hot water to the showerhead once it arrives, and then thermostatically sealing off the tub spout to prevent leaks. Users enjoy a seamless, efficient showering experience—no more hanging round to push, pull, or twist a tub spout diverter once hot water arrives or experiencing wasteful tub spout diverter leaks while showering.

FEATURES

- **Fast Hot Water**
Speeds hot water delivery so your shower gets warm up to 3X faster.
- **Warm-Up Waste Savings**
Automatically reduces water flow when hot water arrives, saving up to 6 gallons per shower.
- **Eliminates Diverter Leaks**
Thermostatic seal stops hot water from exiting tub spout while shower is running, saving up to 5 gallons per shower.
- **Seamless Showering**
Automatically diverts flow to showerhead when hot water arrives for hands-free shower warm-ups.
- **Reduces Flood Risk**
Prevents unattended warm-ups from overflowing tub by reducing flow once hot water arrives.
- **Multiple Mounting Options**
Compatible with copper and galvanized pipes. Select from 1/2" Slip Fit, 1/2" NPT Threaded, and 3/4" NPT Threaded mounting options. Mounts sold separately.

SPECIFICATIONS

MODEL #	DESCRIPTION	MOUNTS	FINISH
EV3301-CP000-CT	ShowerStart Express Tub Spout; single shipper box	No*	Chrome
EV3301-BN000-CT	ShowerStart Express Tub Spout; single shipper box	No*	Brushed Nickel
EV3301-MB000-CT	ShowerStart Express Tub Spout; single shipper box	No*	Matte Black

Patent www.amconservation.com/patents
Other U.S. and foreign patents pending.



evolve™



1701 Charleston Regional Parkway, Suite A
Charleston, SC 29492
(843) 971-1414
www.AMConservation.com

ShowerStart® Express Tub Spout

EV3301-CP000-CT



EV3301-BN000-CT

EV3301-MB000-CT

evolve™

Enjoy More. Use Less.™

DIMENSIONS

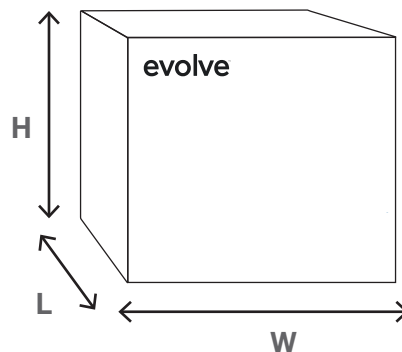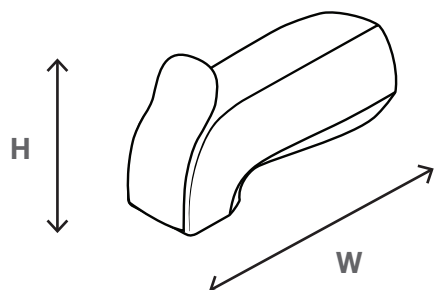

PRODUCT

MODEL #	W	H
EV3301-CP000-CT	3.125"	6.25"
EV3301-BN000-CT	3.125"	6.25"
EV3301-MB000-CT	3.125"	6.25"

CASE

MODEL #	L	W	H	CASE QTY.	GROSS WT.
EV3301-CP000-CT	6.25"	11.6"	11.6"	9	9 lbs.
EV3301-BN000-CT	6.25"	11.6"	11.6"	9	9 lbs.
EV3301-MB000-CT	6.25"	11.6"	11.6"	9	9 lbs.

*Order mounts separately, see Tub Spout Mount Options Table.

TUB SPOUT MOUNT OPTIONS (sold separately)

MODEL #	DESCRIPTION	PIPE COMPATIBILITY	PACK QTY
EV3102	½" Slip Fit Mount	Copper, Galvanized	9 Pack
EV3103	½" NPT Threaded	Galvanized	9 Pack
EV3104	¾" NPT Threaded	Galvanized	9 Pack

TECHNICAL NOTES

The ShowerStart® Express Tub Spout is not an anti-scald device:

- Lower water heater to a maximum of 120° F (49° C).
- Always resume water flow and check water temperature before entering shower.
- Tankless systems require a minimum flow rate to produce hot water. When this product is used with some tankless systems, a brief, yet noticeable change in the shower's temperature may occur shortly after resuming the shower's normal flow.

LIMITED 3-YEAR WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 3 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:
customer care@amconservation.com

To learn more, please visit:
www.AMConservation.com