

ShowerStart® Express Tub and Shower System – Tamper Resistant

EV3201

EV3382

OVERVIEW

Ideal for multifamily properties, the ShowerStart® Express Tamper Resistant Tub and Shower Systems offer the fusion of comfort, convenience, and conservation. You'll also enjoy great feeling high-pressure sprays, more convenience and freedom during your get-ready-routine, and lower utility bills. This system works by cleverly speeding hot water delivery by up to 3X, conveniently saving the hot water that's used while you're waiting for your shower to get warm, efficient showering, and eliminating tub spout diverter leaks to save up to 15 gallons per shower.

Saves Up to 15 Gallons of Water & Heating Energy In 3 Unique Ways

- **Hot Shower Standby**
Stops empty showers from running on-and-on by auto-pausing flow when hot water arrives (~95°F).
- **Great Feeling, Efficient Showers**
WaterSense certified multifunction handshower delivers high-pressure sprays for warm and soothing showering experiences (full body, massage and pause options available).

Non-showerhead Systems (3201) maintain the attached showerhead's performance and flow.
- **Eliminates Tub Spout Diverter Leaks**
Thermostatic seal stops hot water from exiting tub spout while shower is running.

Tamper Resistant

Easily installs with tamper resistant features to discourage undesired removals. Tamper resistant installation tool included.

Fast Hot Water

Speeds hot water delivery to get showers warm up-to 3X faster.

Warm-Up Freedom

Multi-task (shave, brush teeth, go about your morning routine) while waiting for hot water to arrive without water and energy waste.

Seamless Showering

Automatically diverts flow to showerhead when hot water arrives for hands-free shower warm-ups.

Reduces Flood Risk

Prevents unattended warm-ups from overflowing tub by reducing flow once hot water arrives.


MODEL #	Description	Finish
EV3201	ShowerStart® Express Tub Spout with Tamper Resistant Shower Valve* – Contractor Pack	Chrome
EV3382	ShowerStart® Express Tub and Shower System with Multifunction Handheld Showerhead – Tamper Resistant - Contractor Pack	Chrome

* Showerhead not included. Attach desired showerhead or handshower to Valve's 1/2" NPT threads



189-0060-02-00

ASME A112.18.1 / CSA B125.1
Integrated backflow prevention
per ASME A112.18.1/CSA B125.1
Conforms to A112.18.1.

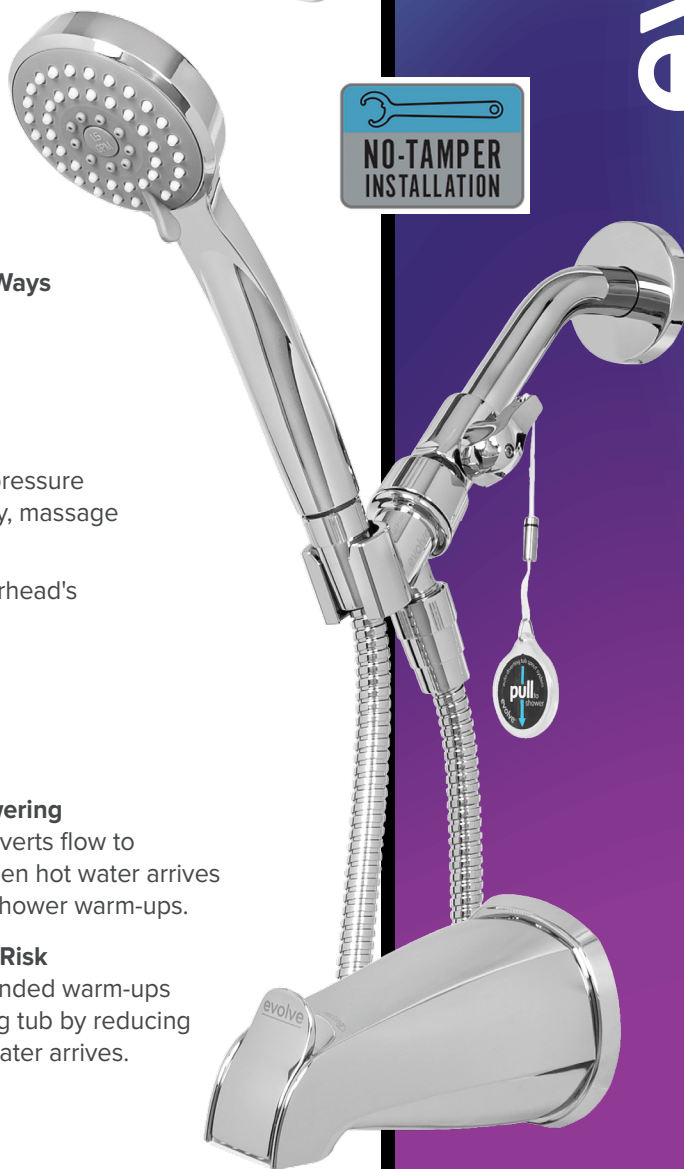

evolve™



1701 Charleston Regional Parkway, Suite A
Charleston, SC 29492
(843) 971-1414
www.amconservation.com

ShowerStart® Express Tub and Shower System – Tamper Resistant

evolve™

Enjoy More. Use Less.™

EV3201

EV3382

SPECIFICATIONS



MODEL #	SPRAY PATTERN	FLOW RATE	INCLUDES MOUNTS	CONTRACTOR PACK
EV3201	N/A	N/A	No*	Yes
EV3382	Multifunction	1.25, 1.5 gpm	No*	Yes

*Order mounts separately, see Tub Spout Mount Options Table.

TUB SPOUT MOUNT OPTIONS

MODEL #	DESCRIPTION	PIPE COMPATIBILITY	PACK QTY
EV3102	½" Slip Fit Mount	Copper, Galvanized	9 Pack
EV3103	½" NPT Threaded	Galvanized	9 Pack
EV3104	¾" NPT Threaded	Galvanized	9 Pack

DIMENSIONS

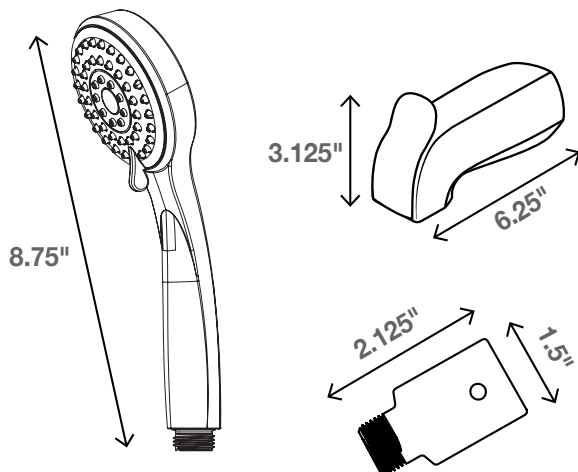

CASE

MODEL #	L	W	H	CASE QTY.	GROSS WT.
EV3201	15"	8"	12"	9	14 lb
EV3382	17.5"	10"	15.9"	9	23.8 lb

TECHNICAL NOTES

Compatibility:

- For use in homes with static water pressure >35 psi
- Works with galvanized or copper plumbing
- Tankless systems require a minimum flow rate to produce hot water. With some tankless systems, a brief yet noticeable change in the shower's temperature may occur shortly after resuming the shower's normal flow

Default operating mode:

- The system's default mode assumes a shower will be taken

Bypass auto-divert for bathing:

- PUSH on the tub spout's diverter after auto-diverting has activated to bypass the handheld showerhead, filling the tub with hot water

Auto resets for next use:

- The system automatically resets to its default mode after a shower or bath is completed

This product is not an anti-scald device

- Lower water heater to 120° F (49° C)
- Always resume water flow and check water temperature before entering shower

3 YEAR WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 3 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:

customercare@amconservation.com

To learn more, please visit:

www.AMConservation.com