

Evolve ShowerStart® TSV³

EV1003-CP-FB

EV1003-BN-FB

EV1003-MB-FB

OVERVIEW

Say hello to a better shower! With this clever device you'll enjoy more convenience and freedom during your get-ready-routine, and lower utility bills - all without changing your showerhead's feel or flow. ShowerStart TSV³ works by effortlessly saving the hot water that's used while you're waiting for your shower to get warm.

FEATURES

- **Hot Water Standby**
Stops empty showers from running on-and-on by auto-pausing flow when hot water arrives.
- **Enjoy More. Use Less™**
No sacrifices or behavior changes required. Saves water and energy used before showering begins.
- **Not Low Flow**
Keep the shower you love – ShowerStart TSV³ doesn't change your showerhead's feel or flow.
- **Works With Any Showerhead**
½" NPT fittings for easy connection to all standard showerheads and shower arms.

CODES AND STANDARDS

Meets or exceeds the following

- Uniform Plumbing Codes (UPC): IAPMO IGC 244-2015a

SPECIFICATIONS

MODEL #	DESCRIPTION	FINISH
EV1003-CP-FB	ShowerStart TSV ³ ; Thermostatic Shower Valve	Chrome Polish
EV1003-BN-FB		Brushed Nickel
EV1003-MB-FB		Matte Black



evolve™



Patent www.amconservation.com/patents
Other U.S. and foreign patents pending.



1701 Charleston Regional Parkway, Suite A
Charleston, SC 29492
(843) 971-1414
www.amconservation.com

Evolve ShowerStart® TSV³

EV1003-CP-FB

EV1003-BN-FB

EV1003-MB-FB

evolve™

Enjoy More. Use Less.™

SPECIFICATIONS



MODEL #	THREAD TYPE	INCLUDES LANYARD	LANYARD LENGTH	SHUT-OFF TEMP
EV1003	1/2" NPT	Yes	12" (30.5 cm)	95° F

TECHNICAL NOTES

The ShowerStart TSV³ is not an anti-scald device:

- Lower water heater to a maximum of 120° F (49° C).
- Always resume water flow and check water temperature before entering shower.
- Tankless systems require a minimum flow rate to produce hot water. When this product is used with some tankless systems a brief, yet noticeable, change in the shower's temperature may occur shortly after resuming the shower's normal flow.

DIMENSIONS

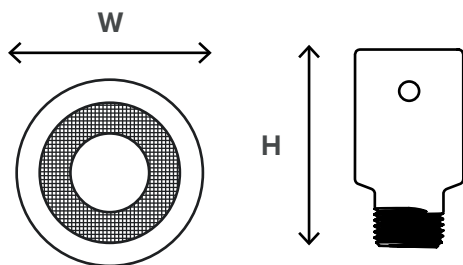

PRODUCT

MODEL #	W	H
EV1003-CP-FB	2.125"	1.5"
EV1003-BN-FB	2.125"	1.5"
EV1003-MB-FB	2.125"	1.5"

CASE

MODEL #	L	W	H	CASE QTY.	GROSS WT.
EV1003 Master Carton	15.8"	11.2"	11.4"	96	14.3 lbs
EV1003 Inner Carton	10.6"	7.5"	5.1"	24	3.3 lbs

Each Master Carton contains 4 Inner Cartons.
Product may be ordered in Inner Carton or Master Carton quantities.

3-YEAR LIMITED WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 3 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:
customercare@amconservation.com

To learn more, please visit:
www.AMConservation.com