

T8 LED Hybrid

25-32W FLUORESCENT EQUIVALENT

OVERVIEW

Simply Conserve®'s 14W T8 LED Hybrid lamp is perfect for offices, conference rooms, hotels, academic complexes, commercial, and medical facilities. Delivering 1,800 lumens, these lamps provide the same light output as a 32W fluorescent while using less than half the power. The hybrid technology reduces maintenance costs and offers flexible installation options, whether a ballast is present or not. You can easily install it as a plug-and-play solution on compatible ballasts or bypass the ballast for a double-end configuration.



FEATURES

- **Efficient Lighting for Any Space**
Perfect for offices, hotels, and medical facilities, this lamp delivers 1,800 lumens with less than half the power of a 32W fluorescent.
- **Reliable Performance in Any Condition**
With instant-on ignition and a specialized cover for optimal light distribution, this lamp ensures smooth, reliable lighting.
- **Versatile Installation Made Easy**
Whether you want to use a ballast or not, this hybrid T8 LED lamp offers plug-and-play or direct line voltage installation options.
- **Built to Last in Any Environment**
Offered in a wide range of temperatures (3500K, 4000K or 5000K units available), this lamp is built to perform in various commercial settings.



BEAM
ANGLE



50,000
HOURS



TRUE
COLOR




FLICKER-
FREE



EASY TO
INSTALL

COLOR TEMPERATURE



LIGHT TYPE	WARM WHITE 2700K-3000K	COOL WHITE/BRIGHT WHITE 3100 - 4500K	DAYLIGHT 5000K
Light Coloration	Hues ranging from orange to yellow-white	A more neutral white light may have a slightly blue tint	Blue-white light mimicking daylight
Ambiance Created	Cozy and inviting	Warm and welcoming	Crisp and invigorating
Ideal Rooms/Locations	Living rooms, bedrooms, hallways	Kitchen and work areas	Offices, garages, and warehouses



1701 Charleston Regional Parkway, Suite A
Charleston, SC 29492
(843) 971-1414
www.AMConservation.com

T8 LED Hybrid

SIMPLYCONSERVE®

Savings Start Here™


ORDERING INFORMATION

SOURCE	WATTAGE	LAMP TYPE	MATERIAL	CCT	OPERATION
L = LED	14 = 14W	T8 = T8 Tube	G = Glass	35 = 3500K 40 = 4000K 50 = 5000K	AB = UL Type A/B, Dual Mode

SPECIFICATIONS

MODEL #	WATTS	EFFICACY	CCT	LM	CRI	VOLTAGE	PF	HZ	DIM
L14T8G35AB-25PK	14W	125 lm/W	3500K	1800	≥80	120-277V	≥0.9	60	No
L14T8G40AB-25PK	14W	125 lm/W	4000K	1800	≥80	120-277V	≥0.9	60	No
L14T8G50AB-25PK	14W	125 lm/W	5000K	1800	≥80	120-277V	≥0.9	60	No
L14T8G40AB-10PK	14W	125 lm/W	4000K	1800	≥80	120-277V	≥0.9	60	No
L14T8G50AB-10PK	14W	125 lm/W	5000K	1800	≥80	120-277V	≥0.9	60	No

DIMENSIONS

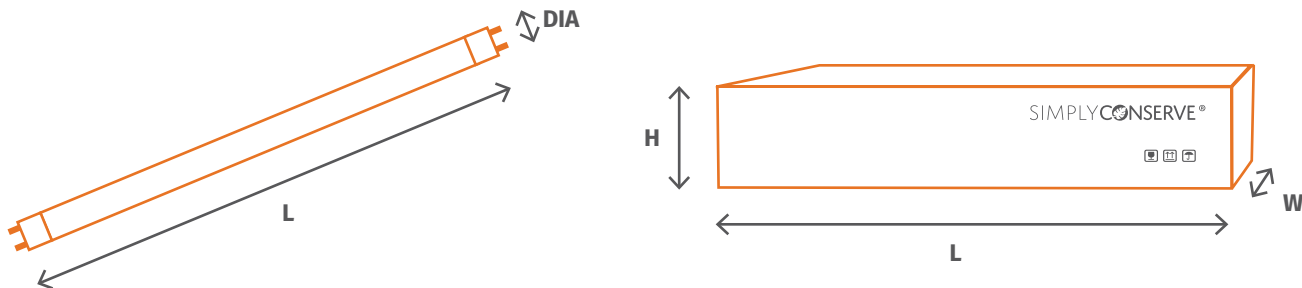

PRODUCT

MODEL #	DIA	L
L14T8G35AB-25PK	1"	47.7"
L14T8G40AB-25PK	1"	47.7"
L14T8G50AB-25PK	1"	47.7"
L14T8G40AB-10PK	1"	47.7"
L14T8G50AB-10PK	1"	47.7"

CASE

MODEL #	L	W	H	CASE QTY	GROSS WT
L14T8G35AB-25PK	49.5625"	6.375"	7.1875"	25	14.3 lb.
L14T8G40AB-25PK	49.5625"	6.375"	7.1875"	25	14.3 lb.
L14T8G50AB-25PK	49.5625"	6.375"	7.1875"	25	14.3 lb.
L14T8G40AB-10PK	49.5"	8.375"	4.75"	10	7 lb.
L14T8G50AB-10PK	49.5"	8.375"	4.75"	10	7lb.

5-YEAR LIMITED WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 5 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:
customer@amconservation.com

To learn more, please visit:
www.AMConservation.com