

ShowerStart® Express Tub and Shower System – Fixed Mount Showerheads

EV3312 EV3322 EV3352 EV3362

OVERVIEW

Featuring ShowerStart® Express technology, the ShowerStart® Express Tub and Shower System gets your shower warm, up to 3X faster, while you enjoy the definitive fusion of comfort, convenience, and conservation. With this forward-thinking tub spout and fixed-mount showerhead combo you'll also experience great feeling high-pressure sprays, more convenience and freedom during your get-ready-routine, and lower utility bills. This system works by cleverly speeding hot water delivery, conveniently saving the hot water that's used while you're waiting for your shower to get warm and eliminating tub spout diverter leaks to save up to 15 gallons per shower.

Saves Up to 15 Gallons of Water & Heating Energy In 3 Unique Ways

- **Hot Shower Standby**
Stops empty showers from running on-and-on by auto-pausing flow when hot water arrives (~95°F).
- **Great Feeling, Efficient Showers**
WaterSense certified to deliver high-pressure sprays for warm and soothing showering experiences.

Single function and multifunction (full body, massage, and pause) showerhead options available.
- **Eliminates Tub Spout Diverter Leaks**
Thermostatic seal stops hot water from exiting tub spout while shower is running.

Fast Hot Water

Speeds hot water delivery to get showers warm up-to 3X faster.

Warm-Up Freedom

Multi-task (shave, brush teeth, go about your morning routine) while waiting for hot water to arrive without water and energy waste.

Seamless Showering

Automatically diverts flow to showerhead when hot water arrives for hands-free shower warm-ups.

Reduces Flood Risk

Prevents unattended warm-ups from overflowing tub by reducing flow once hot water arrives.



MODEL #	Description	Finish
EV3312	ShowerStart® Express Tub and Shower System with Single Function Fixed Mount Showerhead	Chrome
EV3322	ShowerStart® Express Tub and Shower System with Multifunction Fixed Mount Showerhead	Chrome
EV3352	ShowerStart® Express Tub and Shower System with Single Function Fixed Mount Showerhead – Contractor Pack	Chrome
EV3362	ShowerStart® Express Tub and Shower System with Multifunction Fixed Mount Showerhead – Contractor Pack	Chrome



ASME A112.18.1 / CSA B125.1
Conforms to A112.18.1.

189-0042-02-00

evolve™



1701 Charleston Regional Parkway, Suite A
Charleston, SC 29492
(843) 971-1414
www.amconservation.com

ShowerStart® Express Tub and Shower System – Fixed Mount Showerheads

EV3312 EV3322 EV3352 EV3362

evolve™

Enjoy More. Use Less.™



SPECIFICATIONS

MODEL #	SPRAY PATTERN	FLOW RATE	INCLUDES MOUNTS	CONTRACTOR PACK
EV3312	Single Function	1.25, 1.5 gpm	Yes	No
EV3322	Multifunction	1.25, 1.5 gpm	Yes	No
EV3352	Single Function	1.25, 1.5 gpm	No*	Yes
EV3362	Multifunction	1.25, 1.5 gpm	No*	Yes

*Order mounts separately, see Tub Spout Mount Options Table.

TUB SPOUT MOUNT OPTIONS

MODEL #	DESCRIPTION	PIPE COMPATIBILITY	PACK QTY
EV3102	½" Slip Fit Mount	Copper, Galvanized	9 Pack
EV3103	½" NPT Threaded	Galvanized	9 Pack
EV3104	¾" NPT Threaded	Galvanized	9 Pack

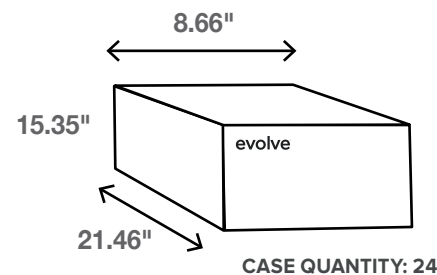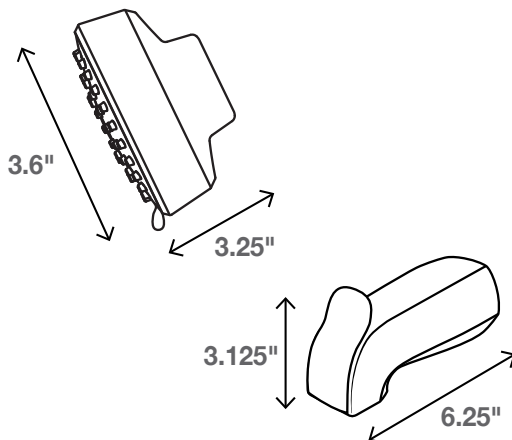

TECHNICAL NOTES

Compatibility:

- For use in homes with static water pressure >35 psi
- Works with galvanized or copper plumbing
- Tankless systems require a minimum flow rate to produce hot water. With some tankless systems, a brief yet noticeable change in the shower's temperature may occur shortly after resuming the shower's normal flow

Default operating mode:

- The system's default mode assumes a shower will be taken

Bypass auto-divert for bathing:

- PUSH on the tub spout's diverter after auto-diverting has activated to bypass the showerhead, filling the tub with hot water

Auto resets for next use:

- The system automatically resets to its default mode after a shower or bath is completed

This product is not an anti-scald device

- Lower water heater to 120° F (49° C)
- Always resume water flow and check water temperature before entering shower

3 YEAR WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 3 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:

customercare@amconservation.com

To learn more, please visit:

www.amconservation.com