AIPHONE

DATA SHEET

JV-1MD

Video Answering Station

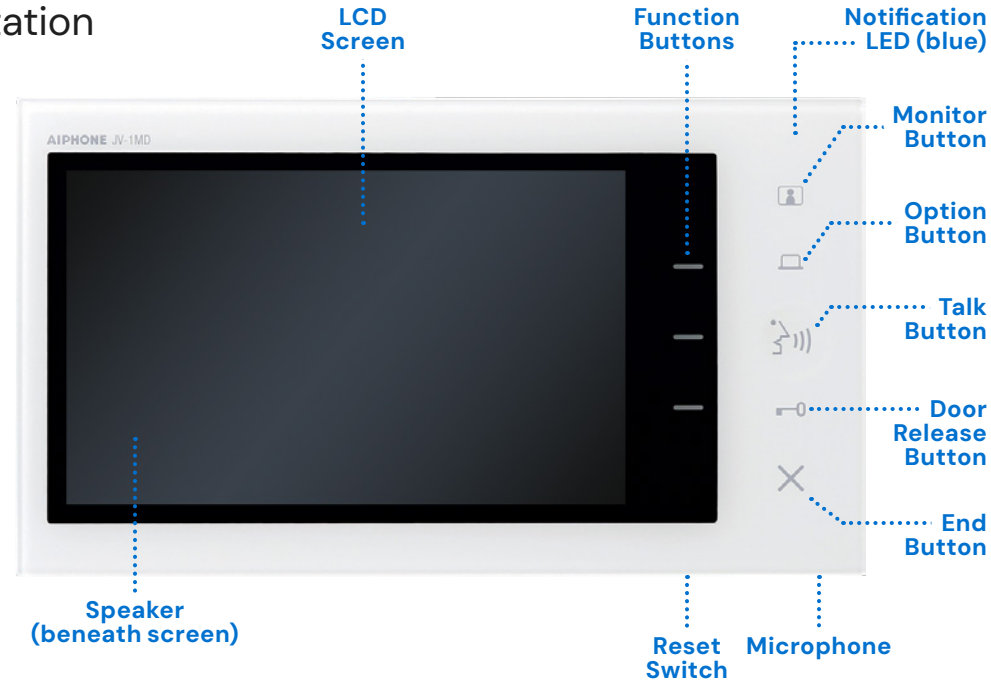

The JV-1MD is a video answering station that is available in the JVS-1V and JVS-1F box sets. Wiring requires two conductors between the JV-1MD and the video door station (Aiphone 871802 PE insulated 18/2 cable is recommended).

The station features a 7" screen to view visitors and configure settings. The electrostatic touch buttons to the right of the screen allow users to unlock the door and activate an exterior device. There are multiple call tone options available for the station. Communication with the door station can either be hands-free or push-to-talk. Still images from past calls can be viewed and deleted from the station; up to 30 images can be stored.

- **7" screen**
- **Slim design**
- **Hands-free or push-to-talk communication**
- **Electrostatic touch buttons**
- **Two-wire connection to door**
- **Simple daisy chain wiring**
- **One output to control a secondary device**
- **Expands system to 1x2**
- **Store up to 30 call images**

The JV-1MD is only available in the JVS-1V and JVS-1F box sets and is not sold separately. Box sets include one JV-1MD answering station, one PS-2420UL power supply, and one video door station.

JVS-1V: JV-DV aluminum die cast surface-mount station

JVS-1F: JV-DVF stainless steel flush-mount station

Power Source	24V DC (use PS-2420UL)
Power Draw	100mA standby, 780mA max
Dry Contacts	Door release N/O 24V AC/DC, 1A Option output N/O 24V AC/DC, 1A
Communication	Hands-free (VOX) or push-to-talk (simplex)
Video Display	7" LCD screen
Mounting	Surface mount directly to wall or desk mount using MCW-S/B
Material	Flame resistant PC + ABS resin
Operating Temp	32°F ~ 104°F (0 ~ 40°C)
Dimensions	5 1/8 in H (130 mm H) · 9 1/16 in W (230 mm W) · 13/16 in D (21 mm D)
Weight	≈1.17 lbs (530g)