



(2011-2021)

WK2 GRAND CHEROKEE ROOF RACK CROSS BARS INSTALLATION INSTRUCTIONS

#	DESCRIPTION	QTY
1	Front Crossbar	1
2	Rear Crossbar	1
3	End Caps	4
4	Tool	1
5	Screws	2
6	Key	1



NOTE: Inspect all components before installation.
If any parts are missing or damaged, contact customer support before installing the product.



Step 1

Starting at one end of the crossbar, carefully slide the rubber strip out of the top channel to expose the mounting screws inside the crossbar.



Step 2A

Using the included wrench, loosen the outer mounting screw as shown.



Step 2B

Loosen the lower mounting bracket from the underside of the crossbar. Do not fully remove the screws.



WK2 GRAND CHEROKEE ROOF RACK CROSS BARS INSTALLATION INSTRUCTIONS

IMPORTANT SAFETY & INSTALLATION NOTES

1. MAX PAYLOAD is: 75KG or 165LBS. Do not overload.
2. Place a clean towel or protective mat over the vehicle roof during installation to help prevent scratches or paint damage.
3. Periodically inspect and re-tighten all mounting hardware, especially after the first 25-50 miles of driving or after carrying heavy loads.



Step 3

Position the mounting bracket onto the vehicle's roof side rail.

Tip: Loosening the outer screw until only a few threads remain engaged will make installation onto the side rail easier.



IMPORTANT: Make sure the thicker side of the crossbar faces the front of the vehicle. Installing the crossbar backward may result in increased wind noise and reduced aerodynamic performance.



Step 4

Slide the crossbar forward or backward to the desired position. Center the crossbar evenly between the roof side rails, then securely tighten all mounting screws.



Step 5


Slide the rubber strip back into the top channel of the crossbar until fully seated.



WK2 GRAND CHEROKEE ROOF RACK CROSS BARS INSTALLATION INSTRUCTIONS

IMPORTANT SAFETY & INSTALLATION NOTES

1. MAX PAYLOAD is: 75KG or 165LBS. Do not overload.
2. Place a clean towel or protective mat over the vehicle roof during installation to help prevent scratches or paint damage.
3. Periodically inspect and re-tighten all mounting hardware, especially after the first 25-50 miles of driving or after carrying heavy loads.

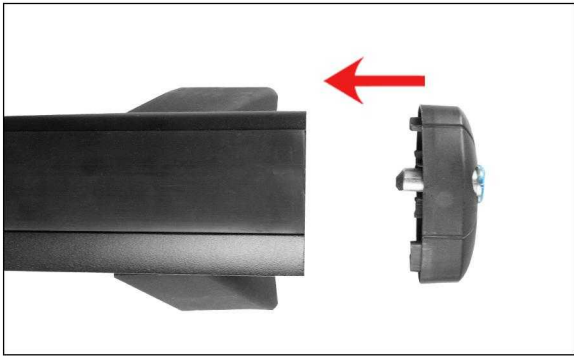

Step 6

Reinstall the end cap onto the crossbar.



Step 7

Lock the end cap using the included key. Repeat Steps 1-7 for the second crossbar.

WARNING


Failure to properly install and secure the crossbars and cargo may result in vehicle damage, personal injury, or loss of cargo while driving.

Always verify that all hardware is securely tightened before each trip.


SEE IMPORTANT SAFETY NOTES ON NEXT PAGE

WK2 GRAND CHEROKEE ROOF RACK CROSS BARS INSTALLATION INSTRUCTIONS

CARGO SAFETY GUIDELINES

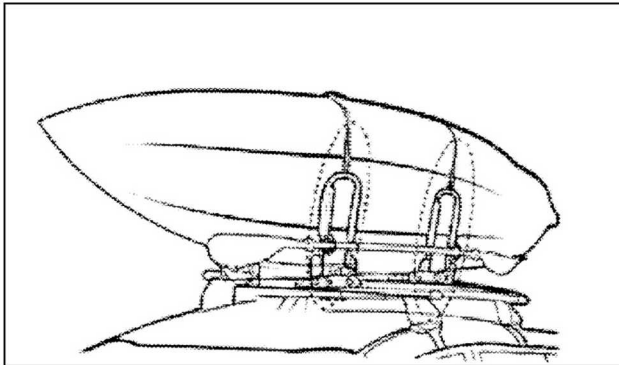

1. Always use compliant accessory carriers designed specifically for kayaks, surfboards, skis, snowboards, bicycles, or other oversized cargo.

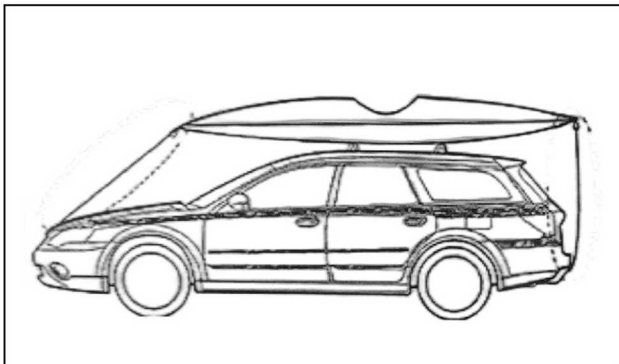

2. Secure long or oversized cargo using additional front and rear tie-down straps to help prevent shifting during transport.



3. Drive at safe speeds appropriate for the cargo weight, weather conditions, and road conditions.

Use extra caution in high winds or during sudden braking.



4. Stop and inspect all mounting hardware and cargo tie-downs after the first few miles of driving and periodically during long trips.



(2011-2021)

WK2 GRAND CHEROKEE ROOF RACK CROSS BARS INSTALLATION INSTRUCTIONS

CUSTOMER SUPPORT

Contact

support@justforjeeps.com

JustForJeeps.com

56 Boston Providence Turnpike

Norwood, MA 02062

United States of America