




ASSEMBLY INSTRUCTIONS



Kit 999-8400-00008PB

(List of replacement items on back)

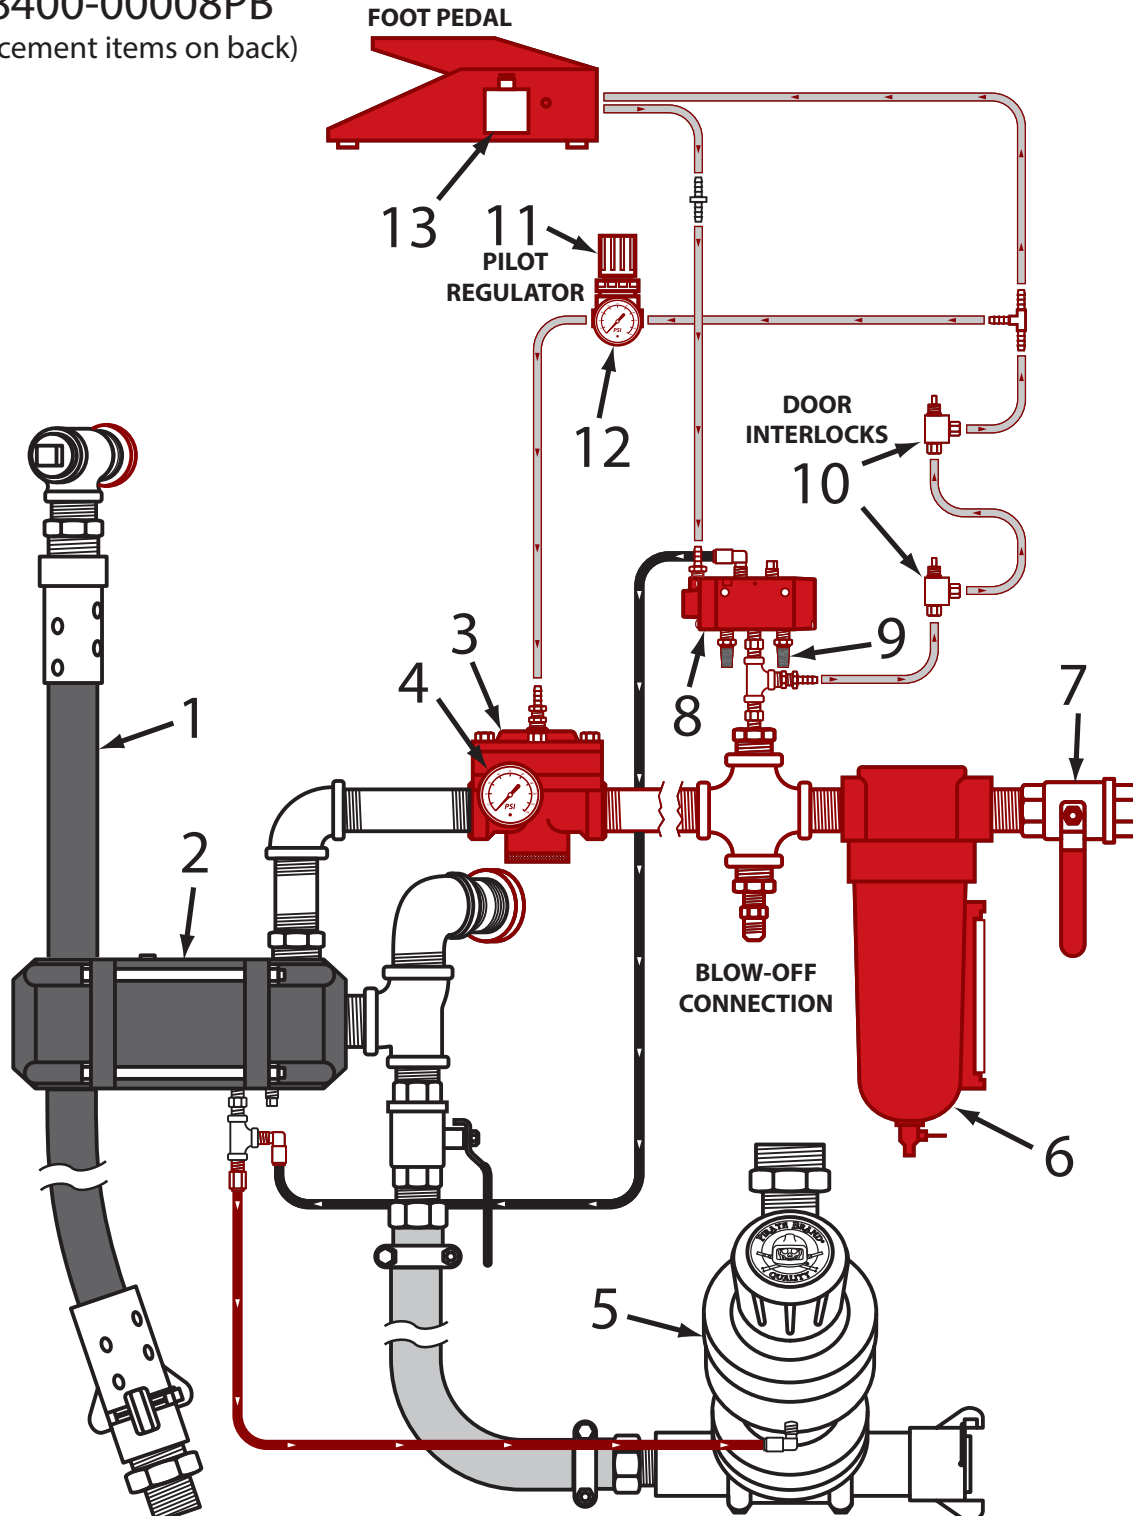

RED ITEMS INDICATE REUSED EXISTING ITEMS (NOT INCLUDED WITH KIT)

REPLACEMENT PARTS

1	520-812	HOSE, BLAST, BLACK, NOMINAL 3/4" ID x 1-1/2" OD, 2 PLY, WP 150 PSI, PER FOOT
2	888-2223-000PB	VALVE, COMBINATION, COMPLETE
	888-2223-00099PB	VALVE, COMBINATION, REPAIR KIT
3	1431-270	1" SLAVE REGULATOR
	1431-270-1	REPAIR KIT FOR 1431-270, 1" SLAVE REGULATOR
4	1242-250	GAUGE, PRESSURE, 0-160 BACK MNT
5	888-2149-106PB	APV, 1", W/URETHANE SLEEVE
	888-2149-10099PB	APV, REPAIR KIT W/URETHANE SLEEVE, INCLUDES PLUNGER
	888-2149-10098PB	APV, SEAL KIT, SEALS ONLY W/URETHANE SLEEVE
6	517-271	FILTER, MANUAL 1" NPT MOISTURE TRAP (5 MICRON)
	505-161	REPAIR KIT, AIR FILTER, 3/4", 1", 1-1/4" & 1-1/2"
	508-002	FILTER ELEMENT 3/4", 1", 1-1/4" & 1-1/2" 5 MICRON
7	VB100	BALL VALVE, FULL PORT, 1" NPT
8	1569-4040	VALVE, CONTROL, 4-WAY, PNEU
9	103-9880	FILTER, 1/4"
10	1569-3950	VALVE, AIR, DOOR LIMIT
11	1431-360	REGULATOR, PILOT
12	408013	PRESSURE GAUGE, 1/8" NPT
13	120-0260	VALVE, FOOT PEDAL AIR



DANGER

Explosion Hazard

Opening a pressurized vessel or performing maintenance on pressurized equipment will cause an explosive release of air causing serious injury or death.

Safely depressurize pressure equipment before attempting to open or service. Always disconnect from air source before performing maintenance.



WARNING

These products and equipment are not under any circumstances to be used with sand or silica products of any type and use of such materials will void any warranty. Also, as with the use of any product or equipment you must be sure to use the proper safety equipment and to properly train your employees in the use of any equipment or products. The manufacturer, wholesaler and distributor assume no responsibility arising from the failure to use proper safety equipment or the failure to properly train employees in the use of products and equipment.

