


COATED FABRICS AND LAMINATES FOR MILITARY, COMMERCIAL AND LAW ENFORCEMENT

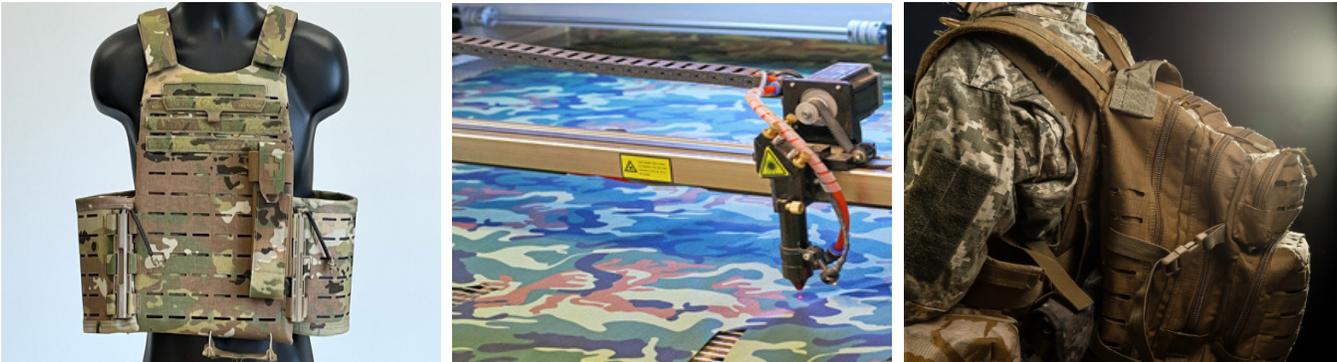

ProTact by Haartz® SOFT is ideal for shoulder straps, belts, laptop sleeves, and other areas where cushioned comfort and protection are desirable.

ProTact by Haartz® SOFT

TECHNICAL DATA

Test	Method	Units	Typical Values
Weight	ASTM D751	oz/yd ² (OSY)	18
Thickness	ASTM D751	Millimeters (MM)	2.80
Adhesion	ASTM D751	Newtons (N)	30
Flex (10,000 cycles)	ASTM D2097	Pass/Fail	Pass
Tensile (Warp/Fill)	ASTM D5034	Newtons (N)	2000/1600
Tongue Tear (Warp/Fill)	ASTM D2261	Newtons (N)	160/180
Trap Tear (Warp/Fill)	ASTM D5733	Newtons (N)	500/350



www.haartz.com

