

Campello

Designed by Nadia Glaser / Skill level: Advanced Beginner



BERROCO®

www.berroco.com

Copyright 2026 in USA and Canada



FINISHED MEASUREMENTS

Approximately (18¾, 21¾)" / (47, 54.5) cm around x (9½, 10)" / (24, 25) cm high

Hat shown in first size.

YARN

BERROCO MERINO 401 CHUNKY (150 g): 1 ball
#13298 Downpour

NEEDLES

16" / 40 cm circular needles, sizes 10 / 6 mm and 10½ / 6.5 mm *or size to obtain gauge*

1 set double-pointed needles (or preferred needles for working small circumferences), size 10½ / 6.5 mm

NOTIONS

Tapestry needle, stitch markers, cable needle

GAUGE

13½ sts and 20 rnds = 4" / 10 cm in St St

12 st cable panel = 2¾" / 7 cm wide

Gauge is measured after blocking. To save time and ensure accurate measurements, take time to check gauge.


SPECIAL ABBREVIATIONS

2/2 RC: Sl 2 sts to cn and hold to BACK, k2, then k2 from cn.

2/2 Rdec: Sl 2 sts to cn and hold to BACK, k2, then k2tog from cn. 1 st dec'd.

We recommend using yarns called for in our instructions. Every effort has been made to ensure that directions contained in this pattern are accurate and complete, however errors do occur. We cannot be responsible for variance of individual knitters, human or typographical errors.

All pattern PDFs are updated when corrections are made. In the event of finding an error, please make sure you've downloaded the most recent version.

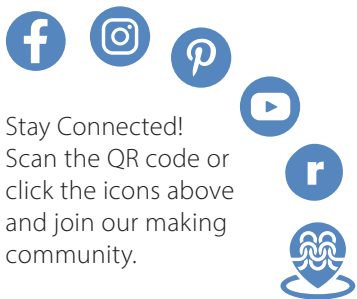

Stay Connected!
Scan the QR code or
click the icons above
and join our making
community.



#berrocoyarn

Berroco Merino 401 Chunky™

Find this Yarn

CABLE PANEL

12 sts.

Rnd 1: P1, k6, 2/2RC, p1.

Rnd 2: P1, k10, p1.

Rnd 3: P1, k4, 2/2RC, k2, p1.

Rnd 4: P1, k10, p1.

Rnd 5: P1, k2, 2/2RC, k4, p1.

Rnd 6: P1, k10, p1.

Rnd 7: P1, 2/2RC, k6, p1.

Rnd 8: P1, k10, p1.

Rep Rnds 1–8 for Cable Panel.

HAT INSTRUCTIONS

Using smaller 16" / 40 cm circular needle, cast on (66, 76) sts.

Place BOR marker and join for working in the round.

Rnd 1: * P1, k1; repeat from * around.

Repeat Rnd 1 until work measures (2, 2½)" / (5, 6) cm from cast-on edge.

Change to larger 16" / 40 cm circular needle.

Cable Panel Set-up Rnd: P1, k8, M1, k1, p1, pm, knit to end. (67, 77) sts.

Rnd 1: Work Rnd 1 of Cable Panel, sm, knit to end.

Rnd 2: Work Rnd 2 of Cable Panel, sm, knit to end.

Rnd 3: Work Rnd 3 of Cable Panel, sm, knit to end.

Rnd 4: Work Rnd 4 of Cable Panel, sm, knit to end.

Rnd 5: Work Rnd 5 of Cable Panel, sm, knit to end.

Rnd 6: Work Rnd 6 of Cable Panel, sm, knit to end.

Rnd 7: Work Rnd 7 of Cable Panel, sm, knit to end.

Rnd 8: Work Rnd 8 of Cable Panel, sm, knit to end.

Following Chart or written instructions, repeat Rnds 1–8 twice more or until work measures (7, 7½)" / (17.5, 19) cm from cast-on edge, ending after completing Rnd 8.

Note: As you decrease for the crown, when there are too few stitches to fit comfortably on your circular needle, change to dpns.

Shape Crown:

Dec Rnd 1: P1, k6, 2/2RDec, p1, sm, * k (9, 11), k2tog, pm; rep from * to end, omitting last pm (BOR marker is in place). (61, 71) sts.

Next Rnd: P1, k9, p1, knit to end slipping markers.

Dec Rnd 2: P1, k4, 2/2RDec, k1, p1, * sm, k (8, 10), k2tog; rep from * to end. (55, 65) sts.



Next Rnd: P1, k8, p1, knit to end slipping markers.

Dec Rnd 3: P1, k2, 2/2RDec, k2, p1, * sm, k (7, 9), k2tog; rep from * to end. (49, 59) sts.

Next Rnd: P1, k7, p1, knit to end slipping markers.

Dec Rnd 4: P1, 2/2RDec, k3, p1, * sm, k (6, 8), k2tog, sm; rep from * to end. (43, 53) sts.

Dec Rnd 5: P1, k4, k2tog, p1, * sm, k (5, 7), k2tog; rep from * to end. (37, 47) sts.

Dec Rnd 6: P1, k3, k2tog, p1, * sm, k (4, 6), k2tog; rep from * to end. (31, 41) sts.

Dec Rnd 7: P1, k2, k2tog, p1, * sm, k (3, 5), k2tog; rep from * to end. (25, 35) sts.

Dec Rnd 8: P1, k1, k2tog, p1, * sm, k (2, 4), k2tog; rep from * to end. (19, 29) sts.

Dec Rnd 9: P1, k2tog, p1, * sm, k (1, 3), k2tog; rep from * to end. (13, 23) sts.


Size 1 ONLY: Dec Rnd 10: K1, k2tog, rm, * k2tog; rep from * to end, removing markers. (7, X) sts.

Size 2 ONLY: Dec Rnd 10: K1, k2tog, rm, * k (X, 2), k2tog; rep from * to end, removing markers. (X, 17) sts.

Dec Rnd 11: * K2tog; rep from * to last st, k1. (X, 9) sts.

For ALL Sizes: Break yarn, leaving an end approximately 10" / 25 cm long. Thread end into tapestry needle and draw through all stitches. Pull up tightly and secure. Weave in all ends and block as desired.

CABLE PANEL CHART

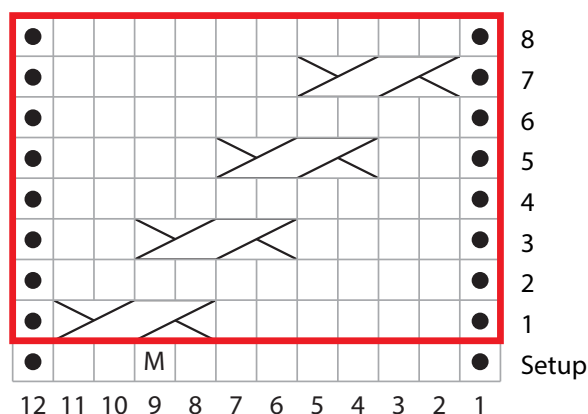

KEY TO CHART

□ knit

● purl

M M1

2/2 RC: Sl 2 to cn and hold to BACK, k2, k2 from cn

□ pattern repeat

CHART NOTES

Work from right to left on every round.

STANDARD ABBREVIATIONS & TERMS

BOR: beginning of round

dec: decrease(s)

dpn(s): double-pointed needle(s)

k: knit

k2tog: knit 2 stitches together (1 stitch decreased)

M1: Make 1—Pick up horizontal strand between stitch just worked and next stitch from front to back, place on left-hand needle, knit this stitch through the back (1 stitch increased)

p: purl

rep: repeat

rm: remove marker

rnd(s): round(s)

sm: slip marker

st(s): stitch(es)



QUESTIONS?

Scan the QR code for the Berroco Learning Center where you will find our fit guide, how-to videos, the complete glossary and more.

