

Ecoglo® Series Hybrid Exit Sign

The Hybrid Exit Sign Series is the no compromise solution for exit signage incorporating the safest backup technology and sophisticated design. The integration of patented Ecoglo® photoluminescence and next-generation LED technology ensures code compliance even in areas with low ambient light surpassing visibility and luminance standards. Advanced manufacturing processes and elegant finish add a unique refined appearance to both the sign and the space in which it is installed.

INPUT

120/240 VAC, 50/60 Hz, 0.1 A

RATED POWER CONSUMPTION


2.25W Single Sided Sign 4.5W Double Sided Sign

PART NO.	DESCRIPTION
EXH-R175	Red Single Sided EXIT Sign, 75ft rated
EXH-R275	Red Double Sided EXIT Sign, 75ft rated
EXH-G175	Green Single Sided EXIT Sign, 75ft rated
EXH-G275	Green Double Sided EXIT Sign, 75ft rated

UNIVERSAL PICTOGRAMS

The single sided sign configuration includes the following with each sign: left arrow, right arrow, left+right arrow, and no arrow.

The double sided sign configuration includes **two** of the following with each sign: left arrow, right arrow, left+right arrow, and no arrow.

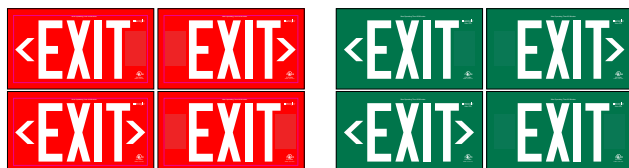

PRODUCT FEATURES

- LED/Photoluminescent Exit Sign System
- No Batteries or Backup Power Required for Power Outages
- High Efficiency Low Power Consumption LED Luminance
- Certified backup for 90 Minute Operating Time at 75 Ft Visibility
- Universal Mounting – Flag, Wall or Ceiling
- Comes Standard with Turn & Lock™ Mounting System for quick and easy installation
- Non-Toxic, Non-Radioactive Photoluminescent Technology
- Directional Labels Included
- Indoor Installation Only
- UL 924 Tested and Listed
- Made in the U.S.A.

See back for details.

Ecoglo® Series Hybrid Exit Sign



Wall Mount



Flag Mount



Ceiling Mount



Contact Safety Media Inc. for a quick quote or to obtain more information about our emergency lighting products.

SAFETY MEDIA INC
10 Meteor Drive
Toronto ON
M9W 1A4
CANADA

Phone: (416) 675.6675
Fax: (416) 675.6678
www.safetymedia.com

Authorized Distributor

INTERNAL SPECIFICATIONS

AC LED: standard 120/240 VAC input
SELF-POWERED: Glow in the dark sealed plates to provide a minimum 90 minutes of emergency duration. Performance Certified.

ELECTRICAL SPECIFICATIONS

The Ecoglo® Hybrid Exit Sign series is configured with high-output LEDs, as standard with 120/240 VAC input. All versions consume only 4.5W nominal power when lit.

PRODUCT WEIGHT

Single Sided Sign 5.15 lbs. Double Sided Sign 6.15 lbs.

INSTALLATION

Versatile mounting hardware provides for quick installation and minimized downtime.

WARRANTY

We offer the best and most comprehensive warranty in the industry, 10 years on enclosure, 5 years on LED and driver plus 25 years on photoluminescent.

MASTER FORMAT NUMBERING (FILING SYSTEM)

26 53 00 Exit Signs

