

# SECTION 3000-FIXTURE ASSEMBLY

## K-52WD ROUND RACK DRAWING (1)



12x  
5/16" WASHER



12x  
5/16" SPRING LOCK WASHER



4x  
5/16"-18 x 1.75" HEX HEAD SOCKET SCREW



LARGE ALLEN KEY



8x  
5/16"-18 x .5" HEX HEAD SOCKET SCREW



SMALL ALLEN KEY

INCLUDED HARDWARE



4x  
1/4"-20 X 1.125" SET SCREW



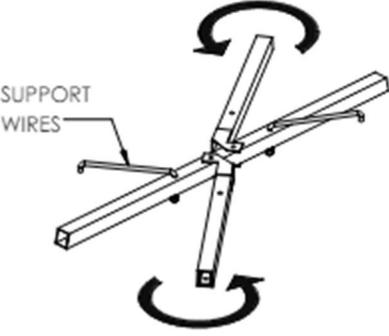
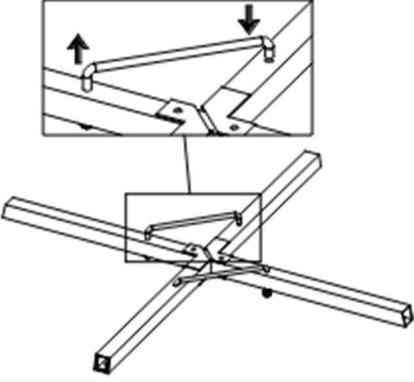
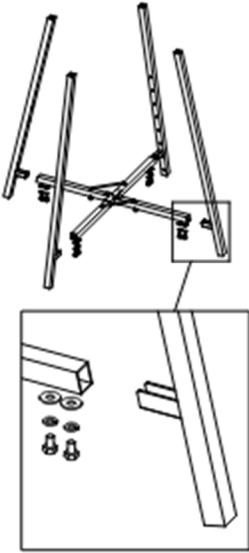
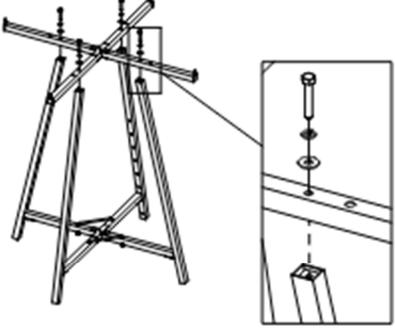
2x  
HANG BAR CONNECTOR TOP



2x  
HANG BAR CONNECTOR TOP

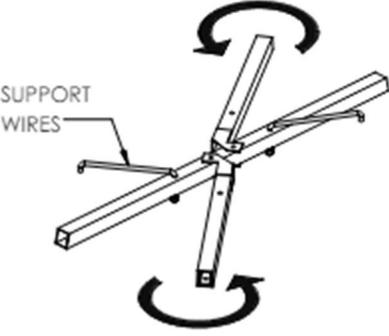
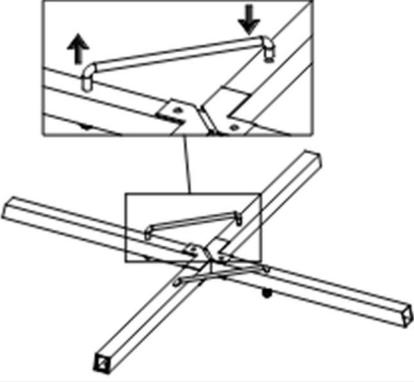
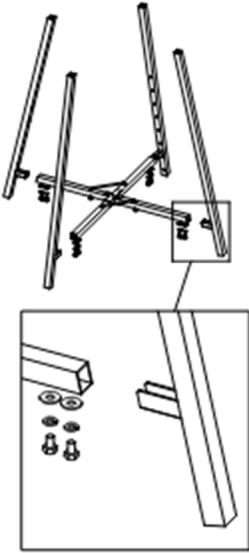
# SECTION 3000-FIXTURE ASSEMBLY

## K-52WD ROUND RACK ASSEMBLY CONT.

<p><b>1a</b></p> <p>UNFOLD THE LOWER X-BRACE. THIS BRACE WILL BE SMALLER AND HAVE SUPPORT WIRES ATTACHED.</p> 	<p><b>1b</b></p> <p>PULL UP ON THE SUPPORT WIRES AND INSERT THE END INTO THE HOLE ON THE ADJACENT TUBE.</p> 
<p><b>2a</b></p> <p>ATTACH THE LOWER LEGS TO THE LOWER X-BRACE WITH FLAT WASHERS, LOCK WASHERS, AND THE SHORT HEX HEAD SCREWS AS SHOWN.</p> 	<p><b>2b</b></p> <p>UNFOLD THE UPPER X-BRACE AND SECURE TO THE LOWER LEGS WITH FLAT WASHERS, LOCK WASHERS, AND THE LONG HEX HEAD SCREWS AS SHOWN.</p> 

# SECTION 3000-FIXTURE ASSEMBLY

## K-52WD ROUND RACK ASSEMBLY CONT.

<p><b>1a</b></p> <p>UNFOLD THE LOWER X-BRACE. THIS BRACE WILL BE SMALLER AND HAVE SUPPORT WIRES ATTACHED.</p> 	<p><b>1b</b></p> <p>PULL UP ON THE SUPPORT WIRES AND INSERT THE END INTO THE HOLE ON THE ADJACENT TUBE.</p> 
<p><b>2a</b></p> <p>ATTACH THE LOWER LEGS TO THE LOWER X-BRACE WITH FLAT WASHERS, LOCK WASHERS, AND THE SHORT HEX HEAD SCREWS AS SHOWN.</p> 	<p><b>2b</b></p> <p>UNFOLD THE UPPER X-BRACE AND SECURE TO THE LOWER LEGS WITH FLAT WASHERS, LOCK WASHERS, AND THE LONG HEX HEAD SCREWS AS SHOWN.</p> 