
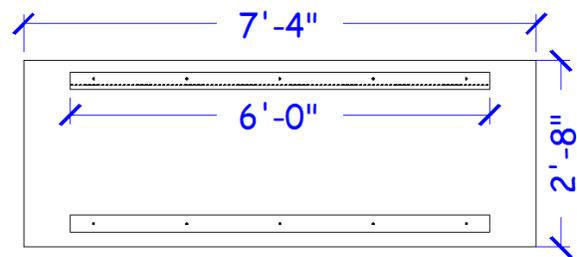




# SECTION 2000-DETAIL DRAWINGS

## 2016 PERIMETER WALL DISPLAY

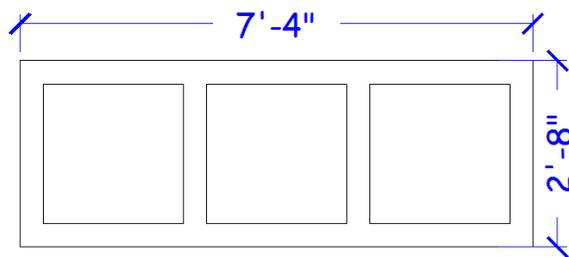



### **3-PANEL DISPLAY:**

Dimensions 88" wide x 32" high. The overall weight is 84lbs. The top 1" x 3" x 72" is the French Cleat that will come mounted to the display. The bottom pre-mounted 1" x 3" x 72" is a spacer to stabilize the sign.

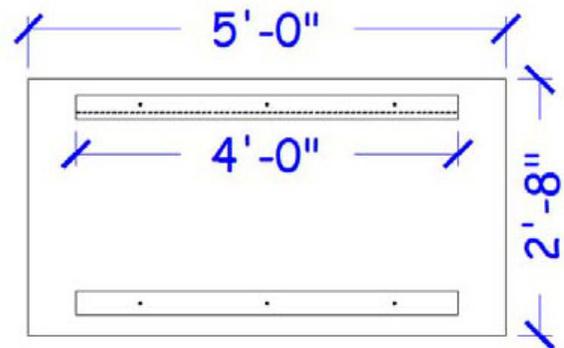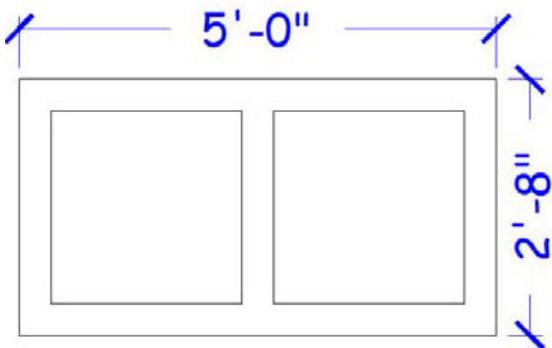

### **2-PANEL DISPLAY:**

Dimensions 60" wide x 32" high. The overall weight is 56lbs. The top 1" x 3" x 48" is the French Cleat that will come mounted to the display. The bottom pre-mounted 1" x 3" x 48" is a spacer to stabilize the sign.




### **1-PANEL DISPLAY:**

Dimensions 32" wide x 32" high. The overall weight is 37lbs. The top 1" x 3" x 24" is the French Cleat that will come mounted to the display. The bottom pre-mounted 1" x 3" x 24" is a spacer to stabilize the sign.

# SECTION 2000-DETAIL DRAWINGS


## 2016 PERIMETER WALL DISPLAY INSTALLATION

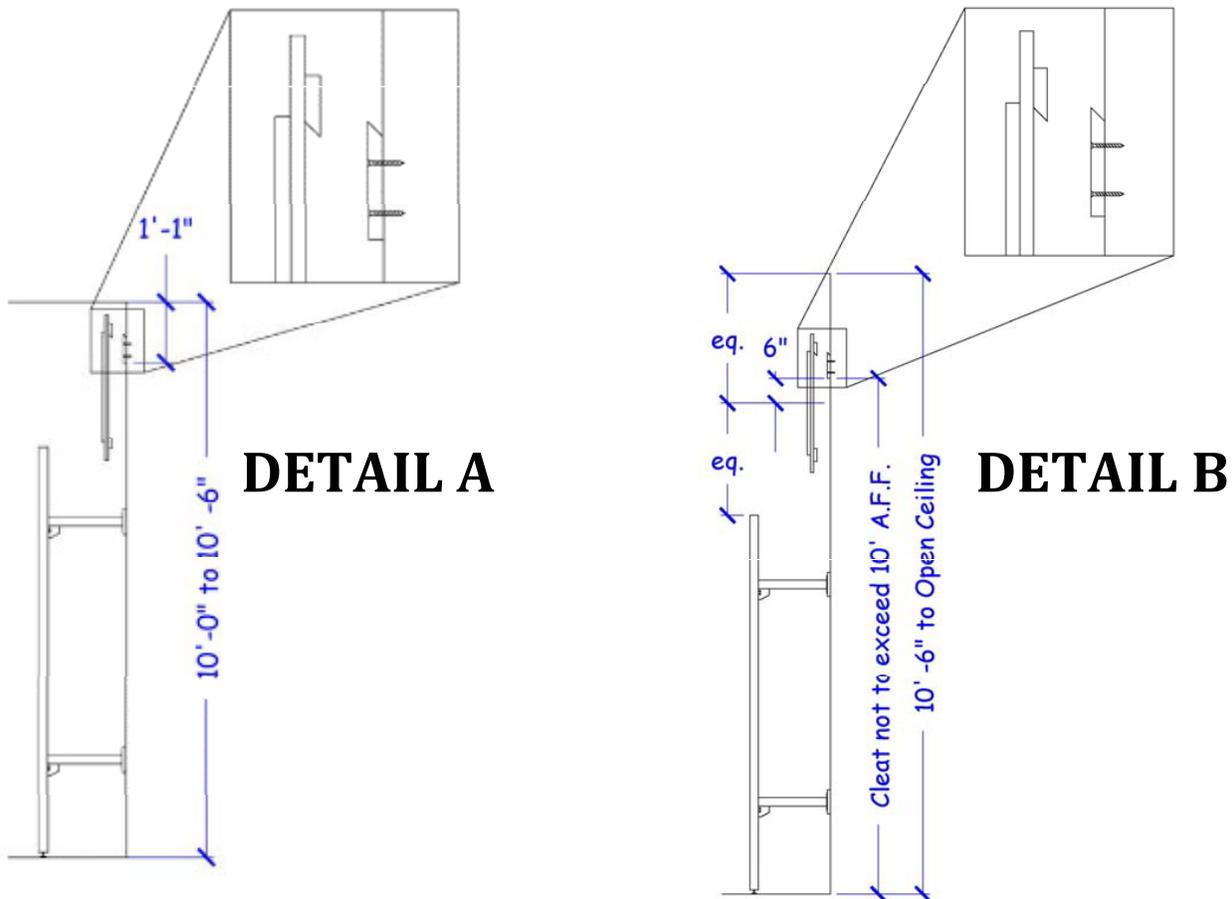


- 2 and 3 panel displays are large and bulky. It is highly recommended that you use at least two people when setting these in place.
- Secure wall mounted French Cleat to the wall by using the appropriate screws. It is recommended that you use two screws per stud.
- Detail A: For ceilings 10' -0" to 10' -6" mount the bottom French Cleat 1' -1" down from the ceiling.
- Detail B: For ceilings 10' -6" to open find the equal distance from the top of the Out Rigger to the ceiling line. Measure up 6" from that point and mount the bottom French Cleat. Do not mount that cleat higher than 10' -0" A.F.F.
- Low ceilings with a height less than 10' -0" will need custom displays. Please contact DE prior to placing your order if you feel this may be an issue.

# SECTION 2000-DETAIL DRAWINGS


## 2016 PERIMETER WALL (MAGNET & GALVANIZED PIECES)




The base signage frame is a 32" x 32" Manhattan Glitz panel, with a 24" x 24" black panel. Leaving a 4" Manhattan Glitz border.



Apply four double sided foam tape sections in each corner of the 24" x 24" black panel.



In the corners adhere the 4" x 4" galvanized squares onto the double sided foam tape.



Set the Custom signage over the top of the galvanized squares and secure in place with the provided circle magnets.