


## Typical Milwaukee 8 Softail Rear Turn Signal Other models may vary!



Pin position 1, Blue=Running light( open on some models)  
 Pin Position 2, Violet=Turn Signal  
 Pin Position 3,Open  
 Pin position 4, Black=Ground

## Kodlin Neowise 3-1 Rear LED Indicator

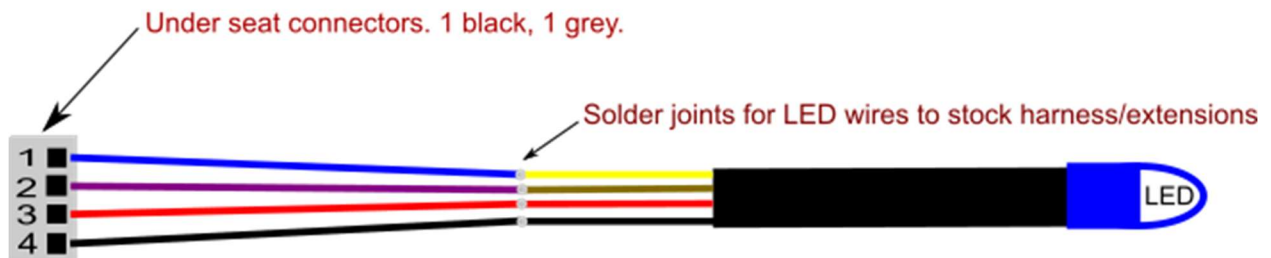

Pin position 1, Blue=Running light to LED yellow wire  
 Pin Position 2, Violet=Turn Signal to LED brown wire  
 Pin Position 3, Blue/Red=Brake light to LED red wire  
 Pin position 4, Black=Ground to LED black wire  
 Wire extensions may be needed to fill pin position 1 and 3  
 depending on your model of bike.

LED Wire Colors  
 Yellow=Running Lights  
 Brown= Turn Signal  
 Red=Brake  
 Black= Ground

### NOTE:

On all models that only have stock turn signals functioning as run/turn/brake lights you must have your BCM taillight configuration set to "Dedicated taillight" This is typically done at Harley dealership or shop with that capability. This will stop brake signal voltage from going to pin 2 and causing an amber LED brake light. Brake signal will now only go through pin 3 for proper red LED brake light.