# 7800/8200 Series Mortise Locks Multi-function Lockbody Options 04, 05, 06, 13, 31, 36, 37, 38

### How to Change Function of Lock:

One green catch screw must be located in following three (3) locations as designated on lock case to create desired function:


- 1. 05. 37 and 38 functions
- 2. 04. 06. 13 and 31 functions

## 3. 36 functions

### Note

When moving green catch screw to 04, 06, 13 and 31 functions, hub position must be at 45° as shown on lockcase.

\*See How to Change Hand of Lock, page 6




Items needed to create following functions:							
Function	Outside Lever	Inside Lever	Trim One Side Kit	Outside Cylinder	Inside Cylinder	Thumb Turn	
04	х	Х	_	х	-		
05	Х	Х	-	Х	Ι	X***	
06	Ι	Х	х	Х	-	-	
13	-	Х	х	-	_	-	
31	_	Х	х	Х	_	_	
36	_	Х	х	Х	_	_	
37	Х	Х	_	Х	_	_	
38	Х	Х	_	Х	Х	_	

\*\*\* 130 KB thumb turn is used with rose trim only, escutcheon trims requiring thumb turns, must be preassembled at factory.

#41 Cylinder is standard for both single and double cylinder functions for 1-3/4" thick door.

Trim-one-side functions always require an inside trim assembly which can be used inside or outside of door (to order Trim-one-side kit (for all trim except PT or FE) order part #82-4611.

# **SARGENT 8200 Series Mortise Locks Function List**

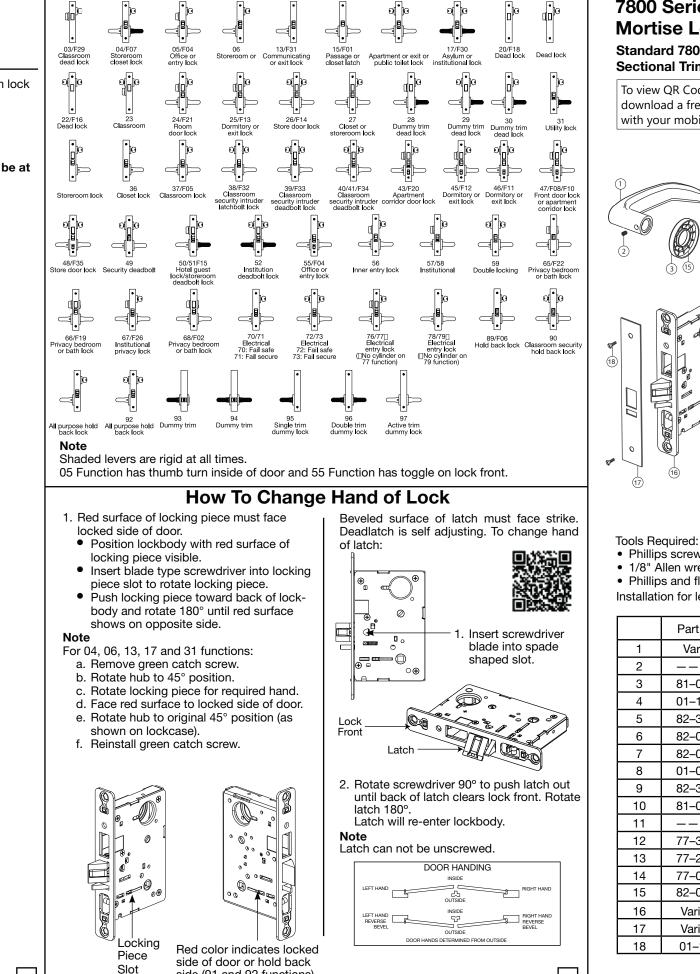

(17)

5

side (91 and 92 functions)

6

# Installation Instructions 7800 Series Knobs/8200 Series Lever Mortise Locks

## Standard 7800/8200 Series Mortise Locks **Sectional Trim Description and Part Number**

To view QR Code video clips within this document, download a free mobile app and scan QR Code with your mobile device.



# WARNING

This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.

- Inside of (12) Door Outside of Door 0 60/ 6 Outside Lever and Rose Assembly (8) ("LN" Rose with "L" Lever)  $\widehat{\mathcal{T}}$
- Phillips screwdriver (standard size)
- 1/8" Allen wrench
- · Phillips and flat tip screwdriver
- Installation for levers and knobs is identical

No.	Description	Req.
ries	Inside lever handle – consult factory	1
	Handle set screw 1/4-28 UNF	1
0093	Rose – "LN" design	2
1495	Machine screw #8-32 x 5/8"	2
3088	Inside adapter and plate assembly	1
0368	Spindle	2
0184	Cap nut	1
0079	Washer	2
3082	Adapter and plate assembly (LN design)	1
0723	Mounting post	2
	Outside lever handle - consult factory	1
3279	Turn lever assembly – 130KB design	1
2595	Emergency button assembly – 184KB	1
0509	KB cylinder rosette (for 8200)	-
0612	Non-loosening wave spring	2
ies	Lockbody	1
ies	Outside front	1
·102	Machine Screw #8-32 x 1/4"	2

Note

