



SHACKLE HOIST RINGS

The ADB® Shackle Hoist Ring is used for OEM applications and permanent mounting on dies, molds, fixtures or equipment. Can be bolted or welded in place.

- Alloy Steel, Black Oxide Finish
- Swivel 360° and Pivot 180° Under Load
- Design Factor = 5.1
- Magnetic Particle Inspected Per ASTM 1444
- Ideal for lifting large and heavy structures



Patent No. 5,823,588

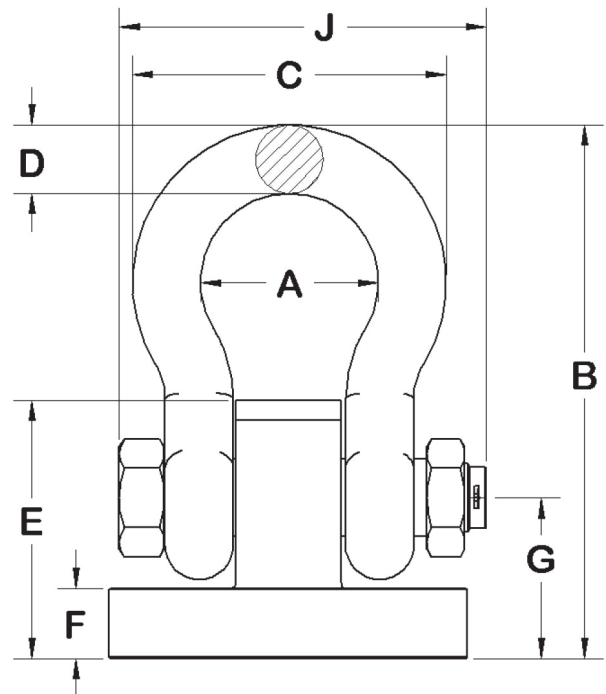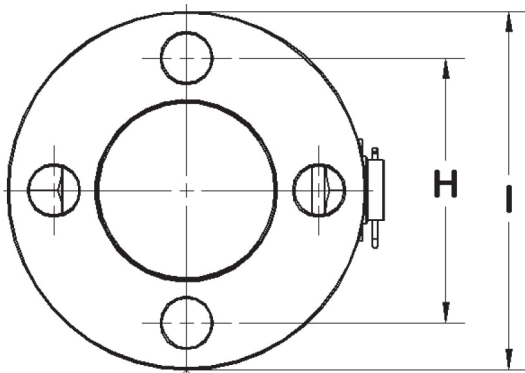

Part No.	Rated Load (lbs)	Screw Size	A	B	C	D	E	F	G	H	I	J	Weight (lbs)
36510	2000	1/4-20 x 1/2	1.03	2.96	1.78	3/8	1.43	0.40	0.91	1.56	2.10	2.17	0.80
36520	3000	5/16-18 x 1/2	1.16	3.55	2.03	7/16	1.76	0.52	1.16	1.76	2.40	2.51	1.30
36530	4000	3/8-16 x 5/8	1.31	3.91	2.31	1/2	1.91	0.52	1.21	2.10	2.90	2.80	2.04
36540	6500	7/16-14 x 3/4	1.69	4.97	2.94	5/8	2.41	0.64	1.51	2.56	3.50	3.53	3.80
36550	13000	5/8-11 x 1	2.28	6.85	4.03	7/8	3.31	0.90	2.06	3.40	4.60	4.71	9.55
36560	19000	3/4-10 x 1 1/4	2.91	8.75	5.16	1-1/8	4.01	1.14	2.61	4.00	5.40	5.09	18.10
36570	24000	7/8-9 x 2	3.25	9.68	5.75	1-1/4	4.51	1.30	2.91	4.50	6.10	6.51	25.70