


MW / Enlarged Master Link

MW Enlarged Master Link is ideal for the simple, speedy assembly of Single and Double Leg chains using Connex connecting elements, as a master link in welded systems and as an end link. Its inner dimensions are larger than those of the AW Master Link, making it suitable for larger crane hooks or special hooks.

The MW Enlarged Master Link must not be used for Triple/Quad Leg chains, except when combined with BW Transition Links in VMW Quad Leg assemblies.

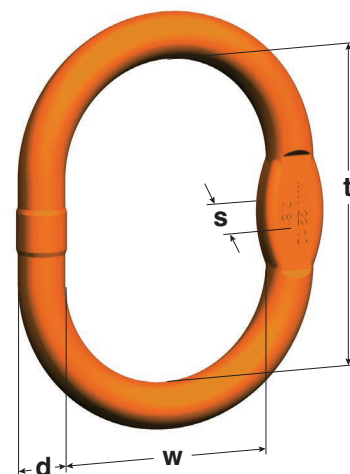

Code	Single leg sling	Double leg sling	WLL (90° - 45°) (lb)	WLL (45° - 30°) (lb)	Fits on single hook DIN 15401	Fits on double hook DIN 15402	d (inch)	t (inch)	w (inch)	s (inch)	Weight (lbs/pc)
MW 10 (Formerly M100)	7/32"	-	3,800	2,700	2.5	4	0.43	3.54	2.56	0.39	0.48
MW 13 (Formerly M130)	9/32"	7/32"	6,100	4,300	4	5	0.55	4.72	2.76	0.39	0.97
MW 16 (Formerly M160)	5/16"	9/32"	8,400	6,000	5	6	0.63	5.51	3.15	0.51	1.56
MW 18 (Formerly M180)	3/8"	5/16"	12,800	9,100	6	8	0.75	6.30	3.74	0.55	2.40
MW 22 (Formerly M220)	1/2"	3/8"	18,500	13,200	10	12	0.91	6.69	4.13	0.67	3.83
MW 26 (Formerly M260)	5/8"	1/2"	30,000	21,400	10	12	1.06	7.48	4.33	0.79	5.83
MW 32 (Formerly M320)	3/4"	5/8"	45,000	32,100	12	16	1.30	9.06	5.12	1.02	10.52
MW 36 (Formerly M360)	7/8"	3/4"	61,100	43,600	20	25	1.50	10.83	5.90	1.14	16.46
MW 56	1-1/4"	1"	111,000	79,200	50	63	2.20	13.78	9.84	1.81	48.36