

CHAPTER 3


Guns

Gun Identification and Configuration Guide

H200, MB2 and slim line guns. Read the configuration code from the gun, select solenoid, filter and cordset, and find standard bodies.


Revision 10/2026

Gun Identification and Configuration Guide	3-1
Gun Attributes at a Glance	3-2
Attribute Breakdown	3-3
Select Your Module	3-6
Select Your Solenoid	3-7
Select Your Inline Filter	3-8
Slim Line Integrated Filter	3-9
Select Your Cordset	3-10
How to Determine Cordset Position	3-11
The Configuration Code	3-12
Build Your Own Configuration Code	3-13
H200 Standard Gun Bodies	3-14
MB2 Standard Gun Bodies	3-20
Quick Ship - Preconfigured Guns	3-24
Hand Held Applicators	3-51

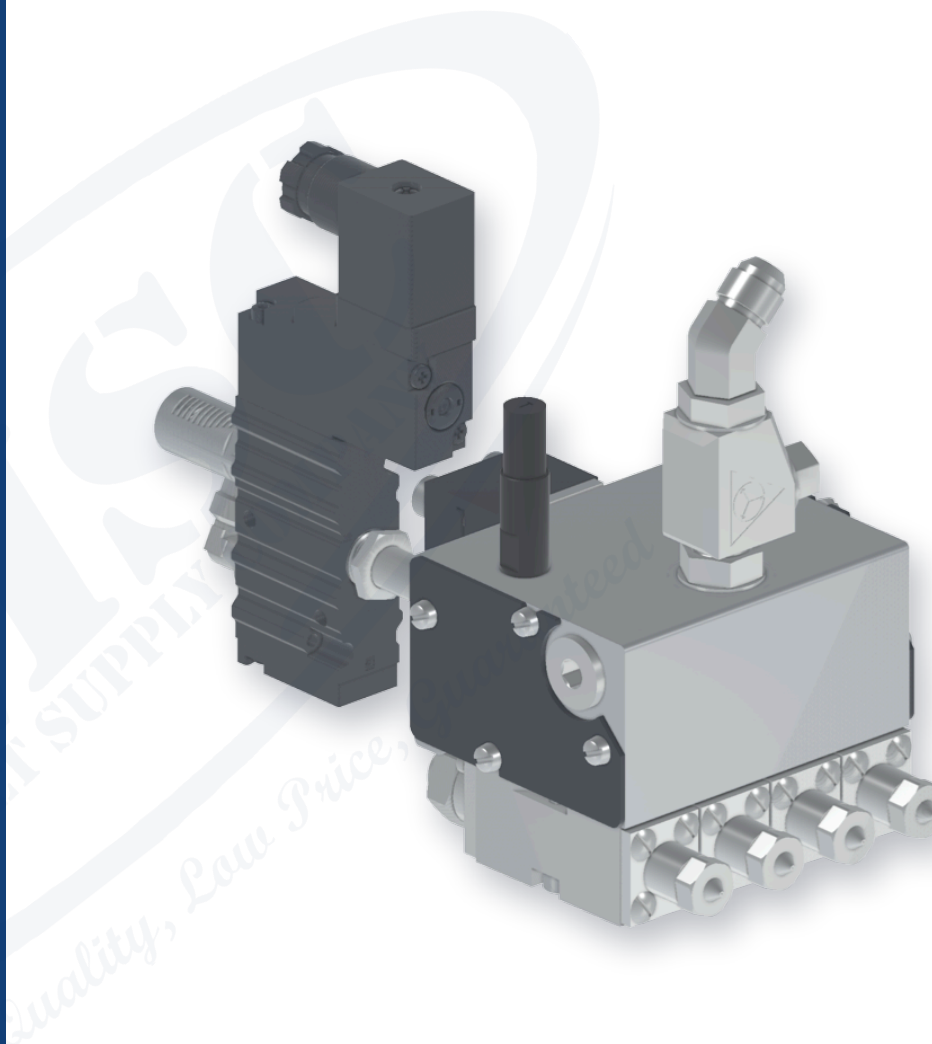



Notes

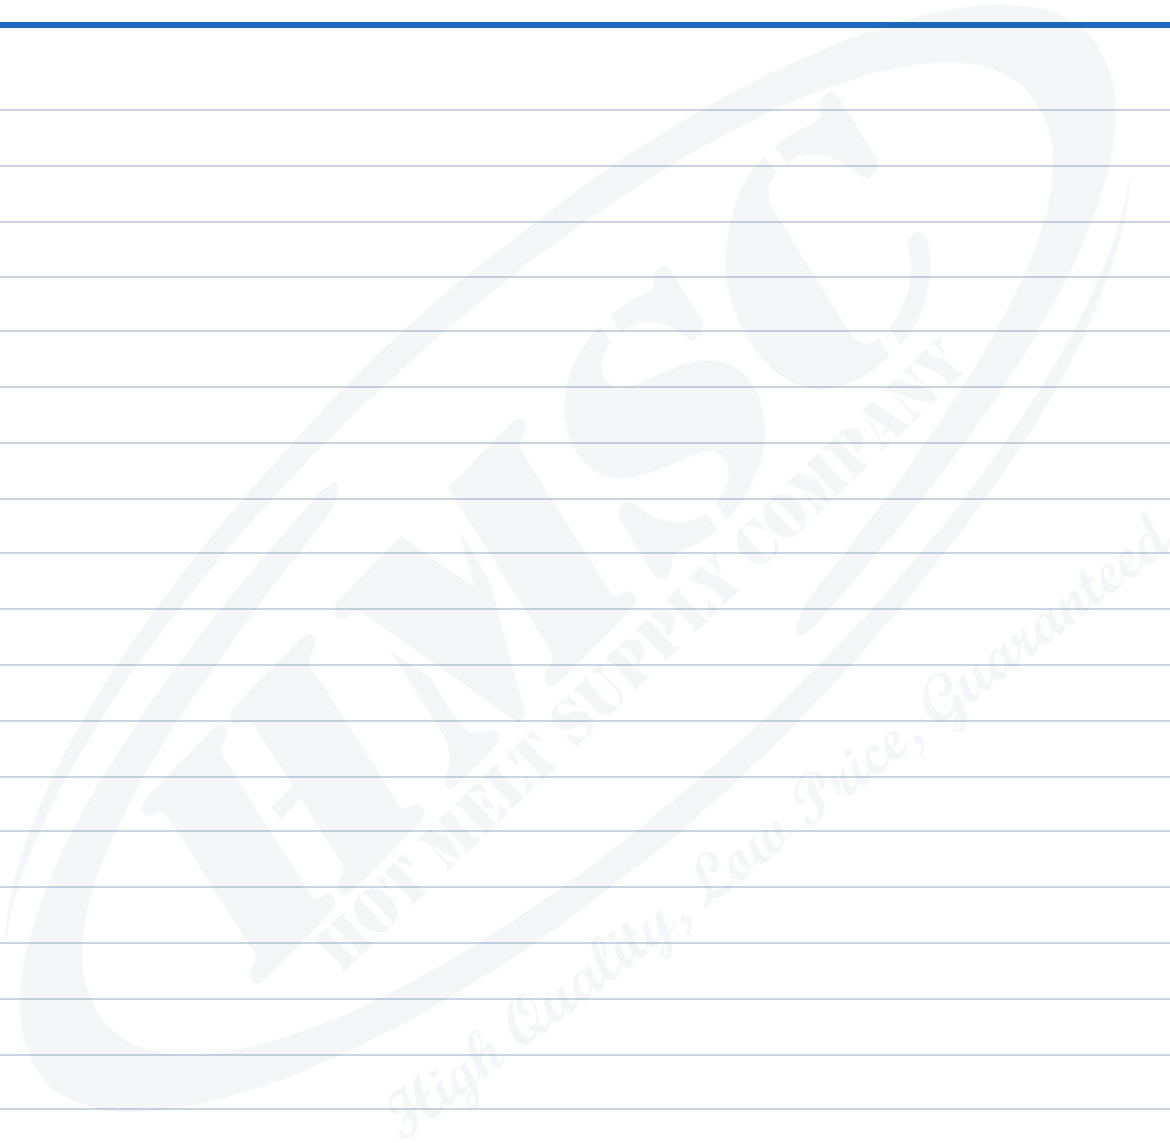




Gun Identification and Configuration Guide


Gun Identification and Configuration Guide

Every H200 and MB2 gun is described by a configuration code. Identify the gun family first, then read each attribute from the gun. Together they make the code, which gives you the exact replacement gun, body or parts.

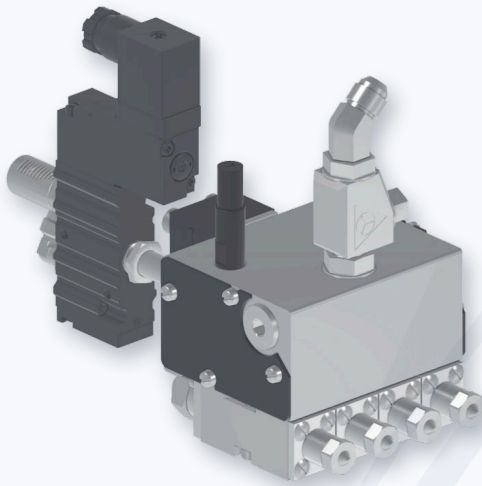


H200 guns

- Large body, 72.8 x 48.5 mm section
- Takes H200 modules
- 1 to 5 modules (BCS single, BCM multi)
- Cordset at the back (BA), or right / left of the bracket (RB / LB)
- 1, 3 or 5 hydraulic ports

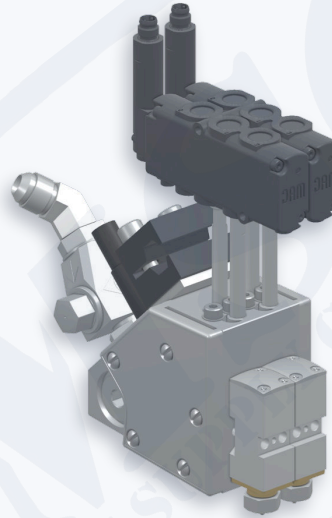

MB2 guns

- Compact body
- Takes mini ball and seat and NC modules
- 1 to 6 modules
- Cordset right / left of the bracket (RB / LB) or side (RS / LS)
- 1, 3 or 5 hydraulic ports

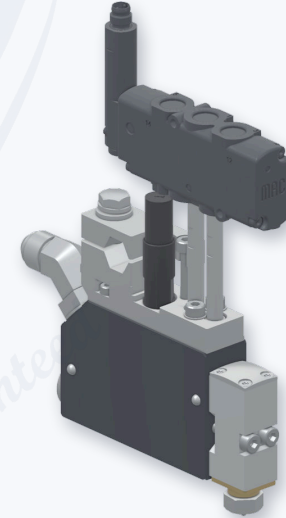

Slim line mini guns

- Thin one piece body, one body for every slim line gun
- Takes one mini module
- Always 1 module, independent air (IA)
- Cordset exits the top side (TS)
- 1 hydraulic port

Safety. Guns run at melt temperature under hydraulic and air pressure. Lock out power, relieve pressure and let the gun cool before inspecting it.

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



TWELVE ATTRIBUTES DESCRIBE EVERY GUN

Gun Attributes at a Glance

Gun Identification and Configuration Guide

Attribute	H200	MB2	Slim line
Group The gun family. It sets which body, modules and options apply.	BCS single, BCM multi	MB2	MB2 (cordset TS, 1 port)
Module type The module installed on every station.	CBST, SLBS, SLBA, SURS, SURA, CBRC, CBZC, CBRA	BEL, NC	BEL, NC
Orifice Orifice size in thousandths of an inch.	STD, 008 to 040	STD, 008 to 040	STD, 008 to 040
Modules How many modules the body holds.	01 (BCS), 02 to 05 (BCM)	01 to 06	01
Voltage Heater and cordset voltage.	A 240 V, B 200 V	A 240 V, B 200 V	A 240 V, B 200 V
Air type How the air valves fire the modules.	CA, IA, PA	CA, IA, PA	IA
Spacing Center to center distance between modules, in mm. One group per gap, left to right.	000 single; see H200 body pages	000 single; see MB2 body pages	000
Cordset type The electrical cordset on the gun.	T, W	T, W, F	T, W, F
Cordset position Where the cordset leaves the gun.	BA (single), RB, LB	RB, LB, RS, LS	TS
Solenoid The air solenoid valve.	XXXX, 3A1A, 3A0B, 4A1A	SP, SD, P1	SP, SD, P1
Hydraulic connector Filter mesh (letter) and fitting angle (number) at the hose connection.	N0, or E / F / G with 0, 4 or 9	E / F / G with 0, 4 or 9	F4, G4, G9, F0
Ports Number of hydraulic ports on the body.	1 (single), 3 or 5	1, 3 or 5	1

Released combinations are listed on the body pages. Other combinations can be built to order.

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Attribute Breakdown

G Group

The gun family. It sets which body, modules and options apply.

How to identify: Look at the body size and module style. Slim line guns hold one module in a thin body with the cordset on top.

Code	Meaning	H200	MB2	Slim
BCS	H200 single module gun	Yes		
BCM	H200 multi module gun	Yes		
MB2	MB2 gun (standard and slim line)		Yes	Yes
BCS-MB2	Same as MB2 (prefix seen on some drawings)		Yes	

1 Module type

The module installed on every station.

How to identify: Use the Module Identification and Ordering Guide: check the air type and needle style, then match the code on the Select Your Module page.

Code	Meaning	H200	MB2	Slim
CBST	H200 standard (ball and seat)	Yes		
SLBS / SLBA	H200 standard AOSC / AOAC	Yes		
SURS / SURA	H200 NC ² AOSC / AOAC	Yes		
CBRC / CBZC	H200 reduced / zero cavity	Yes		
CBRA	H200 right angle	Yes		
BEL	Mini ball and seat		Yes	Yes
NC	Mini NC		Yes	Yes

2 Orifice

Orifice size in thousandths of an inch.

How to identify: Read the size marked on the nozzle hex. Standard ball modules use STD.

Code	Meaning	H200	MB2	Slim
STD	Standard module, orifice set by the nozzle	Yes	Yes	Yes
008 to 040	Built in orifice: 008, 012, 016, 020, 032, 040	Yes	Yes	Yes

3 Modules

How many modules the body holds.

How to identify: Count the modules.

Code	Meaning	H200	MB2	Slim
01	One module	BCS	Yes	Yes
02 to 05	Multi module	BCM	02 to 06	

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Attribute Breakdown

4 Voltage

Heater and cordset voltage.

How to identify: Read the gun label (VOLTS).

Code	Meaning	H200	MB2	Slim
A	240 VAC	Yes	Yes	Yes
B	200 VAC	Yes	Yes	Yes

5 Air type

How the air valves fire the modules.

How to identify: Count the solenoid valves: one valve for all modules is CA; one valve per module is IA; one valve per group of modules (pattern air) is PA.

Code	Meaning	H200	MB2	Slim
CA	Common air: one valve fires every module	Yes	Yes	
IA	Independent air: one valve per module	Yes	Yes	Yes
PA	Pattern air: modules fired in groups	4 and 5 module	4 module	

6 Spacing

Center to center distance between modules, in mm. One group per gap, left to right.

How to identify: Measure center to center of the nozzles. A single module gun is 000.

Code	Meaning	H200	MB2	Slim
000	Single module	Yes	Yes	Yes
022	Two modules, 22 mm apart	Yes	Yes	
022-038-022	Four modules: 22, 38 and 22 mm gaps	Yes		
See pages	Released spacings for every body	Body pages	Body pages	

7 Cordset type

The electrical cordset on the gun.

How to identify: Look at the cordset connector.

Code	Meaning	H200	MB2	Slim
T	Standard 6 pin	Yes	Yes	Yes
W	Water wash	Yes	Yes	Yes
F	Freedom		Yes	Yes

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Attribute Breakdown

8 Cordset position

Where the cordset leaves the gun.

How to identify: Face the modules, look down at the bracket (mounting clamp) on top, and note which side of it the cordset leaves.

Code	Meaning	H200	MB2	Slim
BA	Back	Single module		
RB / LB	Right / left of the bracket	Multi module	Yes	
RS / LS	Right / left side cover; HMSC builds them as RB / LB		Yes	
TS	Top side			Yes

9 Solenoid

The air solenoid valve.

How to identify: Read the valve label.

Code	Meaning	H200	MB2	Slim
XXXX	None: no solenoid, valve or air fittings	Yes		
3A1A	3 port, 24 VDC, LED	Yes		
3A0B	3 port, 24 VDC, no LED	Yes		
4A1A	4 port, 24 VDC, LED	Yes		
SP	High speed MAC		Yes	Yes
SD	Mini MAC		Yes	Yes
P1	High speed Festo		Yes	Yes
XX	None: no solenoid		Yes	

10 Hydraulic connector

Filter mesh (letter) and fitting angle (number) at the hose connection.

How to identify: Look at the hose fitting angle and the filter size stamped on it.

Code	Meaning	H200	MB2	Slim
N	No filter	Yes		
E / F / G	50 / 100 / 200 mesh filter	Yes	Yes	Yes
0 / 4 / 9	Straight / 45 degree / 90 degree	Yes	Yes	Yes
Examples	N0 no filter straight, F4 100 mesh 45 degree, G9 200 mesh 90 degree			

11 Ports

Number of hydraulic ports on the body.

How to identify: Count the hose ports.

Code	Meaning	H200	MB2	Slim
1	One port	Single module	Yes	Yes
3	Three ports	Multi module	Yes	
5	Five ports	Long bodies	Yes	

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



CODE FIELD 1, MODULE TYPE, AND FIELD 2, ORIFICE

Select Your Module

Gun Identification and Configuration Guide

Identify the module with the Module Identification and Ordering Guide (air type, then needle style), then use the code and part numbers below. The orifice code (field 2) is STD for standard ball modules, or the NC / NC² orifice size.

Gun	Code	Module	Module guide, feature pages	HMSC part numbers
H200	CBST	Standard module (ball and seat)	H200 Standard Module	HMS-M-1052925 (AOSC) or HMS-M-1052927 (AOAC)
H200	SLBS / SLBA	Standard AOSC / AOAC module	H200 Standard Module	HMS-M-1052925 (AOSC), HMS-M-1052927 (AOAC); AOSC ball and seat (filtered, 100 mesh / 200 mesh): T10F29B5S-F100 / F200
H200	SURS	NC ² AOSC module	H200 NC ² AOSC Module	HMS-M-1052928-F200 (.008), 1052929-F100 (.012), 1052931-F100 (.016), 1052932-F100 (.020)
H200	SURA	NC ² AOAC module	H200 NC ² AOAC Module	HMS-M-1052934-F200 (.008), 1052935-F100 (.012), 1052936-F100 (.016), 1052937-F100 (.020)
H200	CBRC / CBZC / CBRA	Reduced cavity, zero cavity, right angle	Not in the module guide	Call 1-888-202-1788
MB2 and slim	BEL	Mini ball and seat	Mini Ball and Seat and NC Modules	HMS-M-1095703
MB2 and slim	NC	Mini NC	Mini Ball and Seat and NC Modules	HMS-M-1121479 (.008) to 1121484 (.040)


Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



CODE FIELD 9

Select Your Solenoid

Gun Identification and Configuration Guide



H200 MAC 52 series solenoid valve

Solenoid kit HMS-0005-KIT-04

XXXX None: gun ships without a solenoid

3A1A 3 port, 24 VDC, LED

3A0B 3 port, 24 VDC, no LED

4A1A 4 port, 24 VDC, LED



Replaces Nordson

1056119

T10F61A9S



MB2 and slim, code SP High speed MAC 26A series

Independent air (IA) guns, 5 mm



Replaces Nordson

1095800

T10N58P0S



MB2, code SP High speed MAC 26A series


Common air (CA) guns, 1/8 in



Replaces Nordson

1120826

T11B08B6S



MB2 and slim, code SD Mini MAC 44B series


5 mm



Replaces Nordson

771458

T7K14F8S



MB2 and slim, code P1 High speed Festo



Replaces Nordson

1123910

T11B39A0S

Read the valve label to identify it. IA guns have one valve per module, CA guns one valve for all modules, PA guns one valve per group of modules.


Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.




CODE FIELD 10, HYDRAULIC CONNECTOR: MESH LETTER PLUS FITTING ANGLE

Select Your Inline Filter


Gun Identification and Configuration Guide



Straight (digit 0)



45 degree (digit 4)



90 degree (digit 9)

Saturn ring color shows the mesh:

● Red 50 mesh (E)

● Yellow 100 mesh (F)

● Purple 200 mesh (G)



E0

50 mesh, red ring

Replaces Nordson 1007033

T10P70C3S



E4

50 mesh, red ring

Replaces Nordson 1007233

T10P72C3S



E9

50 mesh, red ring

Replaces Nordson 1007230

T10P72C0S



F0

100 mesh, yellow ring

Replaces Nordson 1007034

T10P70C4S



F4

100 mesh, yellow ring

Replaces Nordson 1007234

T10P72C4S



F9

100 mesh, yellow ring

Replaces Nordson 1007231

T10P72C1S



G0

200 mesh, purple ring

Replaces Nordson 1007035

T10P70C5S



G4

200 mesh, purple ring

Replaces Nordson 1007235

T10P72C5S



G9

200 mesh, purple ring

Replaces Nordson 1007232

T10P72C2S

The Saturn color code is the property of Nordson Corporation and is shown for identification reference only.


Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



CODE FIELD 10 ON SLIM LINE GUNS: MESH LETTER PLUS ADAPTER ANGLE

Slim Line Integrated Filter

Gun Identification and Configuration Guide

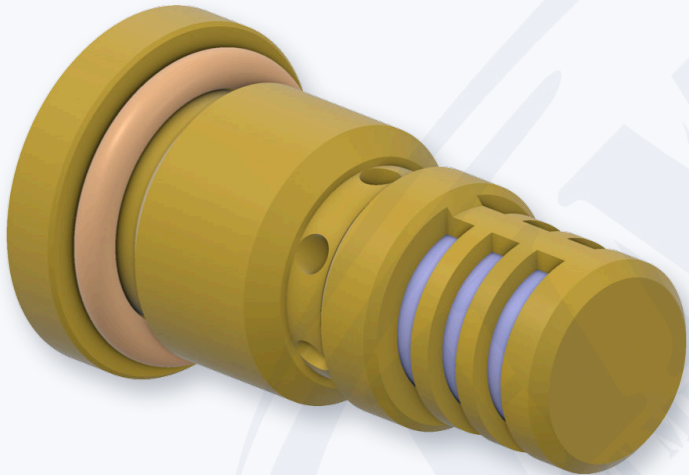

Slim line guns do not take the inline filter. The filter element threads into the gun on an angle adapter: the letter in code field 10 is the mesh, the digit is the adapter angle (0 straight, 4 45 degree, 9 90 degree). Example: F4 is a 100 mesh element on the 45 degree adapter. Replace the element when you change the adhesive or on your filter schedule.



E

50 mesh filter element, 5 pack

Replaces Nordson 1123661

T11B36H1S



F

100 mesh filter element, 5 pack

Replaces Nordson 1123662

T11B36H2S



G

200 mesh filter element, 5 pack

Replaces Nordson 1123663

T11B36H3S

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Select Your Cordset



T, standard 6 pin

Mates with the 6 pin applicator end of packaging hoses. Gun heater 1 and 2, gun RTD 3, RTD common 5, ground. Pin 4 not used.



Most guns

Replaces Nordson 274685
T2K46M5S



Slim line MB2, with heater

Replaces Nordson 1130591
HMS-C-1130591



W, water wash

Round 6 pin plus PE. Mates with the applicator end of washdown hoses. Gun heater 1 and 2, gun RTD 3, RTD common 5, PE ground. Pins 4 and 6 not used. Same connector as Freedom.



Most guns

Replaces Nordson 223804
T2B38P4S



Slim line MB2, with heater

Replaces Nordson 1130868
HMS-C-1130868



F, Freedom

Same round 6 pin plus PE connector as water wash. Mates with a Freedom hose. Gun heater 1 and 2, gun RTD 3, RTD common 5, PE ground. Pins 4 and 6 not used: Nordson Freedom guns use them for gun ID (CID), HMSC guns do not have CID. The solenoid has its own 3 pin plug: S1 solenoid +, S3 solenoid -, S4 ground.

● Gun heater ● Gun sensor ● Shared sensor (RTD common) ● Ground ○ Not used

Gun side connectors, as seen looking into the gun connector: the mirror image of the hose applicator end (see the hose chapter).

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.




CODE FIELD 8

How to Determine Cordset Position

Gun Identification and Configuration Guide

LB: cordset left of the bracket

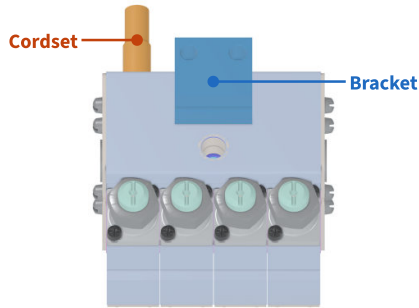


H200
BCM

Modules, nearest you


Replaces Nordson 8514708, solenoid not shown

RB: cordset right of the bracket

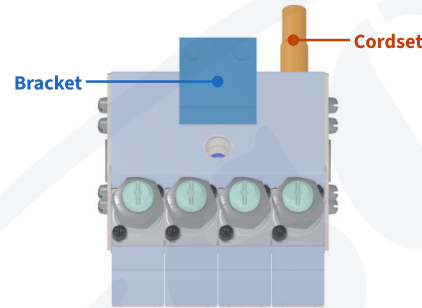

Modules, nearest you


Replaces Nordson 8504867



MB2

Modules, nearest you

Replaces Nordson 8530169, solenoid not shown

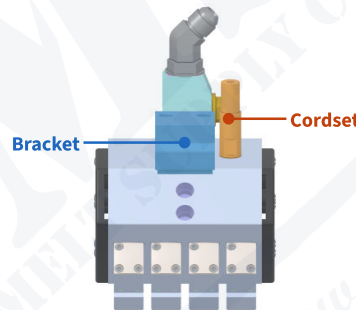

Modules, nearest you

Replaces Nordson 8530475, solenoid not shown

How to look at the gun

Stand in front of the gun, facing the modules, and look down on the top of the gun. The **bracket** is the mounting clamp on top (blue in the pictures). The cordset (orange) leaves the back of the gun to one side of it.

LB: left of the bracket. **RB:** right of the bracket.

MB2 codes RS and LS: on the original gun the cordset comes out of the side cover on that side. The HMSC replacement is built with the cordset on the same side of the bracket: RS as RB, LS as LB.

Single module guns

All H200 single module guns (BCS) are BA: the cordset exits straight out the back, behind the bracket.

All slim line guns are TS: the cordset exits the top side.

1. Face the modules and look down on the top of the gun, at the bracket (the mounting clamp).
2. Find where the cordset leaves the back of the gun: left of the bracket (LB) or right of the bracket (RB).
3. Write that code in field 8. Body pages show which positions each released body is built for.

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



TWELVE FIELDS, LEFT TO RIGHT, SEPARATED BY DASHES

The Configuration Code

Gun Identification and Configuration Guide

BCS G. Group	CBST 1. Module type	STD 2. Orifice	04 3. Modules	A 4. Voltage	CA 5. Air type	022-038-022 6. Spacing	T 7. Cordset type	RB 8. Cordset position	XXXX 9. Solenoid	N0 10. Hydraulic connector	3 11. Ports
------------------------	-------------------------------	--------------------------	-------------------------	------------------------	--------------------------	----------------------------------	-----------------------------	----------------------------------	----------------------------	--------------------------------------	-----------------------

Write the fields in this order, separated by dashes. Module spacing has one 3 digit group per gap between modules (a 4 module gun has 3 groups). A single module gun uses 000.

H200, 4 module

BCM	CBST	STD	04	A	CA	022-038-022	T	RB	XXXX	N0	3
------------	-------------	------------	-----------	----------	-----------	--------------------	----------	-----------	-------------	-----------	----------

BCM-CBST-STD-04-A-CA-022-038-022-T-RB-XXXX-N0-3

H200 multi module gun, standard modules, 240 V, common air, 22-38-22 mm, standard cordset right of the bracket, no solenoid, no filter straight, 3 ports

MB2, 3 module

MB2	NC	012	03	A	CA	016-016	F	LB	SP	F4	3
------------	-----------	------------	-----------	----------	-----------	----------------	----------	-----------	-----------	-----------	----------

MB2-NC-012-03-A-CA-016-016-F-LB-SP-F4-3

MB2 gun, NC .012 modules, 240 V, common air, 16-16 mm, Freedom cordset left of the bracket, high speed MAC, 100 mesh 45 degree, 3 ports

Slim line

MB2	NC	012	01	A	IA	000	F	TS	SP	F4	1
------------	-----------	------------	-----------	----------	-----------	------------	----------	-----------	-----------	-----------	----------

MB2-NC-012-01-A-IA-000-F-TS-SP-F4-1

Slim line gun, one NC .012 module, 240 V, independent air, Freedom cordset top side, high speed MAC, 100 mesh 45 degree, 1 port

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



FILL IN EACH BOX FROM THE GUN, THEN ORDER BY CODE

Build Your Own Configuration Code

Gun Identification and Configuration Guide

G Group BCS, BCM, MB2, BCS-MB2	1 Module type CBST, SLBS / SLBA, SURS / SURA, CBRC / CBZC, CBRA, BEL, NC	2 Orifice STD, 008 to 040	3 Modules 01, 02 to 05	4 Voltage A, B	5 Air type CA, IA, PA
6 Spacing 000, 022, 022-038-022	7 Cordset type T, W, F	8 Cordset position BA, RB / LB, RS / LS, TS	9 Solenoid XXXX, 3A1A, 3A0B, 4A1A, SP, SD, P1, XX	10 Hydraulic connector N, E / F / G, 0 / 4 / 9	11 Ports 1, 3, 5

Configuration code: _____



Use the online configurator


Build the code from drop down menus and get the HMSC part number and bill of materials: www.hotmeltsupplyco.com/tools. Not every combination is stocked. Custom configurations are available: call 1-888-202-1788.

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



H200 Standard Gun Bodies

1 module



body 38.1 mm

1 module · CA · 000

Cordset back · 1 port

BA HMS-BC-100100000

HEATER

240 V HMS-HNA-34660 1/2 x 1.20 in, 147 W

200 V HMS-HNB-34626 1/2 x 1.20 in, 147 W

22



body 44.4 mm

2 modules · CA · 022

Cordset right of bracket · 3 ports


RB HMS-BC-200100000

HEATER

240 V HMS-HNA-34662 1/2 x 1.50 in, 200 W

200 V HMS-HNB-34628 1/2 x 1.50 in, 200 W

25



body 47.4 mm

2 modules · CA · 025

Cordset right of bracket · 3 ports

RB HMS-BC-200200000

HEATER

240 V HMS-HNA-34662 1/2 x 1.50 in, 200 W

200 V HMS-HNB-34628 1/2 x 1.50 in, 200 W

30



body 52.4 mm

2 modules · CA · 030

Cordset right of bracket · 3 ports


RB HMS-BC-200300000

HEATER

240 V HMS-HNA-34662 1/2 x 1.50 in, 200 W

200 V HMS-HNB-34628 1/2 x 1.50 in, 200 W

38



body 60.4 mm

2 modules · CA · 038

Cordset right of bracket · 3 ports


RB HMS-BC-200400000

HEATER

240 V HMS-HNA-34663 1/2 x 2.00 in, 200 W

200 V HMS-HNB-34629 1/2 x 2.00 in, 200 W

40



body 62.4 mm

2 modules · CA · 040

Cordset left of bracket · 3 ports

LB HMS-BC-200500000

HEATER


240 V HMS-HNA-34663 1/2 x 2.00 in, 200 W

200 V HMS-HNB-34629 1/2 x 2.00 in, 200 W

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



H200 Standard Gun Bodies



2 modules · CA · 051


Cordset right of bracket · 3 ports

RB HMS-BC-200600000

HEATER

240 V HMS-HNA-34664 1/2 x 2.44 in, 250 W

200 V HMS-HNB-34630 1/2 x 2.44 in, 250 W



2 modules · CA · 059


Cordset right of bracket · 3 ports

RB HMS-BC-200700000

HEATER

240 V HMS-HNA-34672 1/2 x 2.75 in, 250 W

200 V HMS-HNB-34633 1/2 x 2.75 in, 250 W



2 modules · CA · 075


Cordset left of bracket · 3 ports

LB HMS-BC-200800000

HEATER

240 V HMS-HNA-34673 1/2 x 3.18 in, 250 W

200 V HMS-HNB-34634 1/2 x 3.18 in, 250 W



2 modules · CA · 076


Cordset right of bracket · 3 ports

RB HMS-BC-200900000

HEATER

240 V HMS-HNA-34673 1/2 x 3.18 in, 250 W

200 V HMS-HNB-34634 1/2 x 3.18 in, 250 W



2 modules · CA · 090


Cordset left of bracket · 3 ports

LB HMS-BC-201000000

HEATER

240 V HMS-HNA-34676 1/2 x 4.13 in, 300 W

200 V HMS-HNB-34637 1/2 x 4.13 in, 300 W

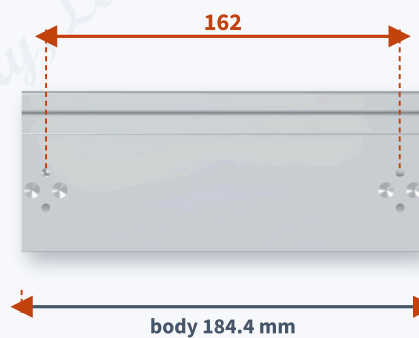

2 modules · CA · 162

Cordset right of bracket · 3 or 5 ports

RB HMS-BC-201100000

HEATER


240 V HMS-HNA-34659 1/2 x 6.50 in, 400 W

200 V HMS-HNB-34644 1/2 x 6.50 in, 400 W

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



H200 Standard Gun Bodies



2 modules • IA • 022

Cordset left of bracket, right of bracket • 3 ports


RB HMS-BC-201400000

LB HMS-BC-201300000

HEATER

240 V HMS-HNA-34662 1/2 x 1.50 in, 200 W

200 V HMS-HNB-34628 1/2 x 1.50 in, 200 W



2 modules • IA • 025

Cordset left of bracket, right of bracket • 3 ports


RB HMS-BC-201600000

LB HMS-BC-201500000

HEATER

240 V HMS-HNA-34662 1/2 x 1.50 in, 200 W

200 V HMS-HNB-34628 1/2 x 1.50 in, 200 W



2 modules • IA • 028

Cordset left of bracket • 3 ports

LB HMS-BC-201700000

HEATER

240 V HMS-HNA-34662 1/2 x 1.50 in, 200 W

200 V HMS-HNB-34628 1/2 x 1.50 in, 200 W



2 modules • IA • 035

Cordset left of bracket, right of bracket • 3 ports

RB HMS-BC-201900000

LB HMS-BC-201800000

HEATER

240 V HMS-HNA-34662 1/2 x 1.50 in, 200 W

200 V HMS-HNB-34628 1/2 x 1.50 in, 200 W



2 modules • IA • 038

Cordset left of bracket, right of bracket • 3 ports


RB HMS-BC-202100000

LB HMS-BC-202000000

HEATER

240 V HMS-HNA-34663 1/2 x 2.00 in, 200 W

200 V HMS-HNB-34629 1/2 x 2.00 in, 200 W



2 modules • IA • 042

Cordset left of bracket • 3 ports

LB HMS-BC-202200000

HEATER


240 V HMS-HNA-34663 1/2 x 2.00 in, 200 W

200 V HMS-HNB-34629 1/2 x 2.00 in, 200 W

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



H200 Standard Gun Bodies



3 modules • CA • 022-022


Cordset right of bracket • 3 ports

RB HMS-BC-300100000

HEATER

240 V HMS-HNA-34663 1/2 x 2.00 in, 200 W

200 V HMS-HNB-34629 1/2 x 2.00 in, 200 W



3 modules • IA • 022-022


Cordset right of bracket • 3 ports

RB HMS-BC-300200000

HEATER

240 V HMS-HNA-34663 1/2 x 2.00 in, 200 W

200 V HMS-HNB-34629 1/2 x 2.00 in, 200 W



4 modules • CA • 022-022-022

Cordset left of bracket, right of bracket • 3 ports


RB HMS-BC-400200000

LB HMS-BC-400100000

HEATER

240 V HMS-HNA-34673 1/2 x 3.18 in, 250 W

200 V HMS-HNB-34634 1/2 x 3.18 in, 250 W



4 modules • CA • 022-025-022


Cordset left of bracket • 3 ports

LB HMS-BC-400300000

HEATER

240 V HMS-HNA-34673 1/2 x 3.18 in, 250 W

200 V HMS-HNB-34634 1/2 x 3.18 in, 250 W



4 modules • CA • 022-038-022


Cordset right of bracket • 3 ports

RB HMS-BC-400400000

HEATER

240 V HMS-HNA-34675 1/2 x 3.75 in, 280 W

200 V HMS-HNB-34635 1/2 x 3.75 in, 280 W



4 modules • CA • 038-038-038

Cordset right of bracket • 3 ports

RB HMS-BC-400500000

HEATER


240 V HMS-HNA-35576 1/2 x 5.00 in, 300 W

200 V HMS-HNB-34639 1/2 x 5.00 in, 300 W

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



H200 Standard Gun Bodies

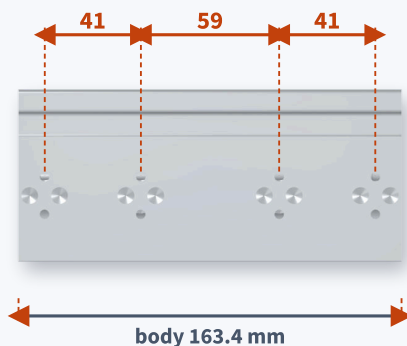

4 modules • CA • 041-059-041


Cordset left of bracket • 3 ports

LB HMS-BC-400600000

HEATER

240 V HMS-HNA-34677 1/2 x 5.50 in, 350 W

200 V HMS-HNB-34640 1/2 x 5.50 in, 350 W

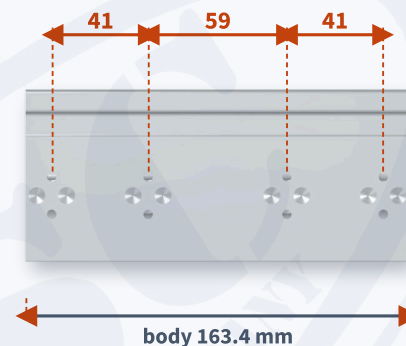

4 modules • CA • 041-059-041


Cordset right of bracket • 5 ports

RB HMS-BC-400700000

HEATER

240 V HMS-HNA-34677 1/2 x 5.50 in, 350 W

200 V HMS-HNB-34640 1/2 x 5.50 in, 350 W



4 modules • IA • 022-022-022


Cordset right of bracket • 3 ports

RB HMS-BC-400800000

HEATER

240 V HMS-HNA-34673 1/2 x 3.18 in, 250 W

200 V HMS-HNB-34634 1/2 x 3.18 in, 250 W



4 modules • IA • 030-030-030


Cordset right of bracket • 3 ports

RB HMS-BC-400900000

HEATER

240 V HMS-HNA-34676 1/2 x 4.13 in, 300 W

200 V HMS-HNB-34637 1/2 x 4.13 in, 300 W



4 modules • PA • 022-022-022


Cordset right of bracket • 3 ports

RB HMS-BC-401000000

HEATER

240 V HMS-HNA-34673 1/2 x 3.18 in, 250 W

200 V HMS-HNB-34634 1/2 x 3.18 in, 250 W



4 modules • PA • 025-025-025

Cordset left of bracket • 3 ports

LB HMS-BC-401100000

HEATER


240 V HMS-HNA-34673 1/2 x 3.18 in, 250 W

200 V HMS-HNB-34634 1/2 x 3.18 in, 250 W

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



H200 Standard Gun Bodies




5 modules · CA · 022-022-022-022

Cordset right of bracket · 3 ports

RB HMS-BC-500100000

HEATER

240 V	HMS-HNA-34675	1/2 x 3.75 in, 280 W
200 V	HMS-HNB-34635	1/2 x 3.75 in, 280 W



5 modules · PA · 022-022-022-022

Cordset right of bracket · 3 ports

RB HMS-BC-500200000

HEATER

240 V	HMS-HNA-34675	1/2 x 3.75 in, 280 W
200 V	HMS-HNB-34635	1/2 x 3.75 in, 280 W

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



MB2 Standard Gun Bodies

1 module



body 18 mm

Slim line • 1 module • IA • 000

Cordset top side (TS) • 1 port

**HEATER AND CORDSET ASSEMBLY
(SOLD COMPLETE)**

T standard	HMS-C-1130591
W washdown	HMS-C-1130868

1 module



body 38.1 mm

1 module • IA • 000

Cordset left of bracket, right of bracket • 1 port

RB HMS-MB-100200000


LB HMS-MB-100100000

HEATER

240 V HMS-HNA-28123 3/8 x 1.28 in, 150 W

200 V HMS-HNB-20406 3/8 x 1.28 in, 150 W

16



body 38.1 mm

2 modules • CA • 016

Cordset left of bracket, right of bracket • 3 ports

RB HMS-MB-200200000


LB HMS-MB-200100000

HEATER

240 V HMS-HNA-28123 3/8 x 1.28 in, 150 W

200 V HMS-HNB-20406 3/8 x 1.28 in, 150 W

22



body 44.1 mm

2 modules • CA • 022

Cordset right of bracket • 3 ports


RB HMS-MB-200300000

HEATER

240 V HMS-HNA-28123 3/8 x 1.28 in, 150 W

200 V HMS-HNB-20406 3/8 x 1.28 in, 150 W

25



body 47.1 mm

2 modules • CA • 025

Cordset right of bracket • 3 ports


RB HMS-MB-200400000

HEATER

240 V HMS-HNA-28123 3/8 x 1.28 in, 150 W

200 V HMS-HNB-20406 3/8 x 1.28 in, 150 W

16



body 38.1 mm

2 modules • IA • 016

Cordset left of bracket, right of bracket • 3 ports

RB HMS-MB-200600000

LB HMS-MB-200500000

HEATER


240 V HMS-HNA-28123 3/8 x 1.28 in, 150 W

200 V HMS-HNB-20406 3/8 x 1.28 in, 150 W

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



MB2 Standard Gun Bodies



2 modules • IA • 022

Cordset left of bracket, right of bracket • 3 ports


RB HMS-MB-200800000

LB HMS-MB-200700000

HEATER

240 V HMS-HNA-28123 3/8 x 1.28 in, 150 W

200 V HMS-HNB-20406 3/8 x 1.28 in, 150 W



2 modules • IA • 032


Cordset left of bracket • 3 ports

LB HMS-MB-200900000

HEATER

240 V HMS-HNA-28123 3/8 x 1.28 in, 150 W

200 V HMS-HNB-20406 3/8 x 1.28 in, 150 W



2 modules • IA • 043


Cordset right of bracket • 3 ports

RB HMS-MB-201000000

HEATER

240 V HMS-HNA-28841 3/8 x 1.50 in, 200 W

200 V HMS-HNB-20401 3/8 x 1.50 in, 200 W



3 modules • CA • 016-016


Cordset left of bracket • 3 ports

LB HMS-MB-300100000

HEATER

240 V HMS-HNA-28841 3/8 x 1.50 in, 200 W

200 V HMS-HNB-20401 3/8 x 1.50 in, 200 W



3 modules • IA • 020-020


Cordset left of bracket • 3 ports

LB HMS-MB-300200000

HEATER

240 V HMS-HNA-28841 3/8 x 1.50 in, 200 W

200 V HMS-HNB-20401 3/8 x 1.50 in, 200 W



3 modules • IA • 025-030

Cordset left of bracket • 3 ports

LB HMS-MB-300300000

HEATER


240 V HMS-HNA-20682 3/8 x 2.00 in, 200 W

200 V HMS-HNB-20291 3/8 x 2.00 in, 200 W


Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.




MB2 Standard Gun Bodies

**3 modules • IA • 035-035**


Cordset left of bracket, right of bracket • 3 ports

RB HMS-MB-300500000**LB** HMS-MB-300400000**HEATER****240 V** HMS-HNA-29311 3/8 x 2.75 in, 250 W**200 V** HMS-HNB-20296 3/8 x 2.75 in, 250 W**4 modules • CA • 020-020-020**


Cordset right of bracket • 3 ports

RB HMS-MB-400100000**HEATER****240 V** HMS-HNA-21662 3/8 x 2.44 in, 250 W**200 V** HMS-HNB-20294 3/8 x 2.44 in, 250 W**4 modules • CA • 022-022-022**


Cordset left of bracket • 3 ports

LB HMS-MB-400200000**HEATER****240 V** HMS-HNA-29311 3/8 x 2.75 in, 250 W**200 V** HMS-HNB-20296 3/8 x 2.75 in, 250 W**4 modules • IA • 016-029-032**

Cordset left of bracket • 3 ports

LB HMS-MB-400300000**HEATER****240 V** HMS-HNA-29387 3/8 x 3.18 in, 250 W**200 V** HMS-HNB-20293 3/8 x 3.18 in, 250 W**4 modules • IA • 032-029-016**

Cordset left of bracket • 3 ports

LB HMS-MB-400400000**HEATER****240 V** HMS-HNA-29387 3/8 x 3.18 in, 250 W**200 V** HMS-HNB-20293 3/8 x 3.18 in, 250 W**4 modules • PA • 016-016-016**


Cordset right of bracket • 3 ports

RB HMS-MB-400500000**HEATER****240 V** HMS-HNA-20682 3/8 x 2.00 in, 200 W**200 V** HMS-HNB-20291 3/8 x 2.00 in, 200 W

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



MB2 Standard Gun Bodies



4 modules · PA · 018-018-018


Cordset right of bracket · 3 ports

RB HMS-MB-400600000

HEATER

240 V HMS-HNA-21662 3/8 x 2.44 in, 250 W

200 V HMS-HNB-20294 3/8 x 2.44 in, 250 W



4 modules · PA · 022-025-022


Cordset right of bracket · 3 ports

RB HMS-MB-400700000

HEATER

240 V HMS-HNA-29311 3/8 x 2.75 in, 250 W

200 V HMS-HNB-20296 3/8 x 2.75 in, 250 W



6 modules · IA · 016-016-016-016

Cordset left of bracket · 3 ports

LB HMS-MB-600100000

HEATER

240 V HMS-HNA-29387 3/8 x 3.18 in, 250 W

200 V HMS-HNB-20293 3/8 x 3.18 in, 250 W

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



RELEASED CONFIGURATIONS, BUILT FROM STOCKED SUBASSEMBLIES

Quick Ship - Preconfigured Guns

Gun Identification and Configuration Guide

These guns are built to released HMSC drawings from stocked subassemblies, so they ship quickly. Order by the Nordson number, the HMSC configured part number or the configuration code. Each gun lists its complete subassemblies, the same part numbers you order for service, and the cordset pinout. Scan the code on a gun for its page on www.hotmeltsupplyco.com.

What every gun includes

- Gun body and the correct heater for that body and voltage
- Modules, solenoid valves and cordset
- Inline filter, when the code calls for one
- H200 guns: the HMSC parts kit (clamp plates, insulator, plugs, wiring) and side cover kit
- MB2 and slim line guns: mounting hardware and covers are included with the body

Slim line guns use a heater and cordset assembly sold complete. "Call" means the part is built to order: call 1-888-202-1788.

Reading an HMSC gun part number

HMS-BC- 4 1 02 1 0 1 23



Digit	Meaning
BC / MB	H200 gun (BC) or MB2 and slim line gun (MB)
Modules	Number of modules
Cordset and voltage	1 T 240 V, 2 W 240 V, 3 T 200 V, 4 W 200 V, 5 F 240 V, 6 F 200 V
Body (2 digits)	Body number: the same digits as the body part numbers on the body pages
Module class	1 standard ball and seat, 2 NC ² / NC needle, 3 zero cavity
Orifice	0 STD, 1 .008, 2 .012, 3 .016, 4 .020, 5 .032, 6 .040
Solenoid	0 none (XXXX or XX), 1 3A1A, 2 SP, 3 SD, 4 P1, 5 3A0B, 6 4A1A
Filter (2 digits)	Mesh: 0 none, 1 50, 2 100, 3 200. Fitting: 0 straight, 2 45°, 3 90°

Example: HMS-BC-410210123 is an H200 gun, 4 modules, cordset T 240 V, body 02 (HMS-BC-400200000), standard modules, standard orifice, 3A1A solenoid, 100 mesh filter on a 90° fitting.

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



DIRECT REPLACEMENT FOR NORDSON

8503597, 8503629

HMS-BC-110121000

BCS-CBRC-008-01-A-CA-000-T-BA-XXXX-N0-1

Also built as BCS-SURS-008-01-A-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000


Modules HMS-M-1052928-F200

Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660

Cordset T2K46M5S

Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON

8503598, 8503630

HMS-BC-110122000

BCS-CBRC-012-01-A-CA-000-T-BA-XXXX-N0-1

Also built as BCS-SURS-012-01-A-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000



Modules HMS-M-1052929-F100

Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660

Cordset T2K46M5S

Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON

8503635, 8503980

HMS-BC-120122000

BCS-CBRC-012-01-A-CA-000-W-BA-XXXX-N0-1

Also built as BCS-SURS-012-01-A-CA-000-W-BA-XXXX-N0-1

Body HMS-BC-100100000


Modules HMS-M-1052929-F100

Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660

Cordset T2B38P4S

Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON

8503599, 8503631

HMS-BC-110123000

BCS-CBRC-016-01-A-CA-000-T-BA-XXXX-N0-1

Also built as BCS-SURS-016-01-A-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000


Modules HMS-M-1052931-F100

Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660

Cordset T2K46M5S

Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON

8504691

HMS-BC-120123000

BCS-CBRC-016-01-A-CA-000-W-BA-XXXX-N0-1

Body HMS-BC-100100000



Modules HMS-M-1052931-F100

Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660

Cordset T2B38P4S

Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON

8503600

HMS-BC-110124000

BCS-CBRC-020-01-A-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000

Modules HMS-M-1052932-F100

Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660

Cordset T2K46M5S

Cover kit HMS-0005-KIT-01




Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8504473, 8503717, 8528797

HMS-BC-110110122

BCS-CBST-STD-01-A-CA-000-T-BA-3A1A-F4-1

Also built as BCS-SLBS-STD-01-A-CA-000-T-BA-3A1A-F4-1

Body HMS-BC-100100000

Modules T10F29B5S

Cordset T2K46M5S

Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660


Solenoid HMS-0005-KIT-04

Filter T10P72C4S

Cover kit HMS-0005-KIT-01



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8504476

HMS-BC-110110123

BCS-CBST-STD-01-A-CA-000-T-BA-3A1A-F9-1

Body HMS-BC-100100000

Modules T10F29B5S

Cordset T2K46M5S


Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660

Solenoid HMS-0005-KIT-04

Filter T10P72C1S

Cover kit HMS-0005-KIT-01



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8504468, 8503700

HMS-BC-110110103

BCS-CBST-STD-01-A-CA-000-T-BA-3A1A-N9-1

Also built as BCS-SLBS-STD-01-A-CA-000-T-BA-3A1A-N9-1

Body HMS-BC-100100000

Modules T10F29B5S

Cordset T2K46M5S

Cover kit HMS-0005-KIT-01


Heater HMS-HNA-34660

Solenoid HMS-0005-KIT-04

Parts kit HMS-0005-KIT-03



W cordset, 6 pin +
PE



DIRECT REPLACEMENT FOR NORDSON

8503640, 8503761

HMS-BC-120110000

BCS-CBST-STD-01-A-CA-000-W-BA-XXXX-N0-1

Also built as BCS-SLBS-STD-01-A-CA-000-W-BA-XXXX-N0-1

Body HMS-BC-100100000

Modules T10F29B5S

Parts kit HMS-0005-KIT-03


Heater HMS-HNA-34660

Cordset T2B38P4S

Cover kit HMS-0005-KIT-01



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8503622

HMS-BC-110131000

BCS-CBZC-008-01-A-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000


Modules HMS-M-1052928-F200

Parts kit HMS-0005-KIT-03


Heater HMS-HNA-34660

Cordset T2K46M5S

Cover kit HMS-0005-KIT-01



W cordset, 6 pin +
PE



DIRECT REPLACEMENT FOR NORDSON

8503628

HMS-BC-120131000

BCS-CBZC-008-01-A-CA-000-W-BA-XXXX-N0-1

Body HMS-BC-100100000

Modules HMS-M-1052928-F200

Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660

Cordset T2B38P4S


Cover kit HMS-0005-KIT-01



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



DIRECT REPLACEMENT FOR NORDSON


8504891

HMS-BC-130131000

BCS-CBZC-008-01-B-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000
Modules HMS-M-1052928-F200
Parts kit HMS-0005-KIT-03

Heater HMS-HNB-34626
Cordset T2K46M5S
Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON


8503623

HMS-BC-110132000

BCS-CBZC-012-01-A-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000
Modules HMS-M-1052929-F100
Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660
Cordset T2K46M5S
Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON


8503627

HMS-BC-120132000

BCS-CBZC-012-01-A-CA-000-W-BA-XXXX-N0-1

Body HMS-BC-100100000
Modules HMS-M-1052929-F100
Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660
Cordset T2B38P4S
Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON


8503624

HMS-BC-110133000

BCS-CBZC-016-01-A-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000
Modules HMS-M-1052931-F100
Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660
Cordset T2K46M5S
Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON



8505060

HMS-BC-110134100

BCS-CBZC-020-01-A-CA-000-T-BA-3A1A-N0-1

Body HMS-BC-100100000
Modules HMS-M-1052932-F100
Cordset T2K46M5S
Cover kit HMS-0005-KIT-01

Heater HMS-HNA-34660
Solenoid HMS-0005-KIT-04
Parts kit HMS-0005-KIT-03



DIRECT REPLACEMENT FOR NORDSON

8503621

HMS-BC-110134000

BCS-CBZC-020-01-A-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000
Modules HMS-M-1052932-F100
Parts kit HMS-0005-KIT-03



Heater HMS-HNA-34660
Cordset T2K46M5S
Cover kit HMS-0005-KIT-01



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



DIRECT REPLACEMENT FOR NORDSON


8503625

HMS-BC-110135000

BCS-CBZC-032-01-A-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000
Modules HMS-M-1056127-F100
Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660
Cordset T2K46M5S
Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON



8503626

HMS-BC-110136000

BCS-CBZC-040-01-A-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000
Modules HMS-M-1056128
Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660
Cordset T2K46M5S
Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON


8518806

HMS-BC-110110520

BCS-SLBS-STD-01-A-CA-000-T-BA-3A0B-F0-1

Body HMS-BC-100100000
Modules T10F29B5S
Cordset T2K46M5S
Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660
Solenoid HMS-0005-KIT-04
Filter T10P70C4S
Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON


8503714, 8532535

HMS-BC-110110120

BCS-SLBS-STD-01-A-CA-000-T-BA-3A1A-F0-1

Body HMS-BC-100100000
Modules T10F29B5S
Cordset T2K46M5S
Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660
Solenoid HMS-0005-KIT-04
Filter T10P70C4S
Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON



8504454

HMS-BC-110110100

BCS-SLBS-STD-01-A-CA-000-T-BA-3A1A-N0-1

Body HMS-BC-100100000
Modules T10F29B5S
Cordset T2K46M5S
Cover kit HMS-0005-KIT-01

Heater HMS-HNA-34660
Solenoid HMS-0005-KIT-04
Parts kit HMS-0005-KIT-03



DIRECT REPLACEMENT FOR NORDSON

8504467

HMS-BC-110110102

BCS-SLBS-STD-01-A-CA-000-T-BA-3A1A-N4-1

Body HMS-BC-100100000
Modules T10F29B5S
Cordset T2K46M5S
Cover kit HMS-0005-KIT-01


Heater HMS-HNA-34660
Solenoid HMS-0005-KIT-04
Parts kit HMS-0005-KIT-03



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



DIRECT REPLACEMENT FOR NORDSON


8503691

HMS-BC-110110030

BCS-SLBS-STD-01-A-CA-000-T-BA-XXXX-G0-1

Body HMS-BC-100100000
Modules T10F29B5S
Filter T10P70C5S
Cover kit HMS-0005-KIT-01

Heater HMS-HNA-34660
Cordset T2K46M5S
Parts kit HMS-0005-KIT-03



DIRECT REPLACEMENT FOR NORDSON


8503686

HMS-BC-110110000

BCS-SLBS-STD-01-A-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000
Modules T10F29B5S
Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660
Cordset T2K46M5S
Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON


8503795

HMS-BC-120110123

BCS-SLBS-STD-01-A-CA-000-W-BA-3A1A-F9-1

Body HMS-BC-100100000
Modules T10F29B5S
Cordset T2B38P4S
Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660
Solenoid HMS-0005-KIT-04
Filter T10P72C1S
Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON


8503813

HMS-BC-130110122

BCS-SLBS-STD-01-B-CA-000-T-BA-3A1A-F4-1

Body HMS-BC-100100000
Modules T10F29B5S
Cordset T2K46M5S
Parts kit HMS-0005-KIT-03

Heater HMS-HNB-34626
Solenoid HMS-0005-KIT-04
Filter T10P72C4S
Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON



8503639

HMS-BC-130110000

BCS-SLBS-STD-01-B-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000
Modules T10F29B5S
Parts kit HMS-0005-KIT-03

Heater HMS-HNB-34626
Cordset T2K46M5S
Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON

8507503

HMS-BC-110121122

BCS-SURS-008-01-A-CA-000-T-BA-3A1A-F4-1

Body HMS-BC-100100000
Modules HMS-M-1052928-F200
Cordset T2K46M5S
Parts kit HMS-0005-KIT-03



Heater HMS-HNA-34660
Solenoid HMS-0005-KIT-04
Filter T10P72C4S
Cover kit HMS-0005-KIT-01



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns




DIRECT REPLACEMENT FOR NORDSON

8510319**HMS-BC-110121123**

BCS-SURS-008-01-A-CA-000-T-BA-3A1A-F9-1

Body HMS-BC-100100000
Modules HMS-M-1052928-F200
Cordset T2K46M5S
Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660
Solenoid HMS-0005-KIT-04
Filter T10P72C1S
Cover kit HMS-0005-KIT-01





DIRECT REPLACEMENT FOR NORDSON

8503880**HMS-BC-120121100**

BCS-SURS-008-01-A-CA-000-W-BA-3A1A-N0-1

Body HMS-BC-100100000
Modules HMS-M-1052928-F200
Cordset T2B38P4S
Cover kit HMS-0005-KIT-01

Heater HMS-HNA-34660
Solenoid HMS-0005-KIT-04
Parts kit HMS-0005-KIT-03





DIRECT REPLACEMENT FOR NORDSON

8503892**HMS-BC-130121000**

BCS-SURS-008-01-B-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000
Modules HMS-M-1052928-F200
Parts kit HMS-0005-KIT-03

Heater HMS-HNB-34626
Cordset T2K46M5S
Cover kit HMS-0005-KIT-01




DIRECT REPLACEMENT FOR NORDSON

8503978**HMS-BC-110122122**

BCS-SURS-012-01-A-CA-000-T-BA-3A1A-F4-1

Body HMS-BC-100100000
Modules HMS-M-1052929-F100
Cordset T2K46M5S
Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660
Solenoid HMS-0005-KIT-04
Filter T10P72C4S
Cover kit HMS-0005-KIT-01





DIRECT REPLACEMENT FOR NORDSON

8514540**HMS-BC-110122132**

BCS-SURS-012-01-A-CA-000-T-BA-3A1A-G4-1

Body HMS-BC-100100000
Modules HMS-M-1052929-F100
Cordset T2K46M5S
Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660
Solenoid HMS-0005-KIT-04
Filter T10P72C5S
Cover kit HMS-0005-KIT-01



DIRECT REPLACEMENT FOR NORDSON

8503997**HMS-BC-120122123**

BCS-SURS-012-01-A-CA-000-W-BA-3A1A-F9-1

Body HMS-BC-100100000
Modules HMS-M-1052929-F100
Cordset T2B38P4S
Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660
Solenoid HMS-0005-KIT-04
Filter T10P72C1S
Cover kit HMS-0005-KIT-01




Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8503998**HMS-BC-130122000**


BCS-SURS-012-01-B-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000
Modules HMS-M-1052929-F100
Parts kit HMS-0005-KIT-03

Heater HMS-HNB-34626
Cordset T2K46M5S
Cover kit HMS-0005-KIT-01



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8504064**HMS-BC-110123100**


BCS-SURS-016-01-A-CA-000-T-BA-3A1A-N0-1

Body HMS-BC-100100000
Modules HMS-M-1052931-F100
Cordset T2K46M5S
Cover kit HMS-0005-KIT-01

Heater HMS-HNA-34660
Solenoid HMS-0005-KIT-04
Parts kit HMS-0005-KIT-03



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8504058**HMS-BC-130123000**


BCS-SURS-016-01-B-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000
Modules HMS-M-1052931-F100
Parts kit HMS-0005-KIT-03

Heater HMS-HNB-34626
Cordset T2K46M5S
Cover kit HMS-0005-KIT-01



T cordset, 6 pin




DIRECT REPLACEMENT FOR NORDSON

8504171**HMS-BC-110124123**

BCS-SURS-020-01-A-CA-000-T-BA-3A1A-F9-1

Body HMS-BC-100100000
Modules HMS-M-1052932-F100
Cordset T2K46M5S
Parts kit HMS-0005-KIT-03

Heater HMS-HNA-34660
Solenoid HMS-0005-KIT-04
Filter T10P72C1S
Cover kit HMS-0005-KIT-01

W cordset, 6 pin +
PE

DIRECT REPLACEMENT FOR NORDSON

8504178**HMS-BC-120124100**


BCS-SURS-020-01-A-CA-000-W-BA-3A1A-N0-1

Body HMS-BC-100100000
Modules HMS-M-1052932-F100
Cordset T2B38P4S
Cover kit HMS-0005-KIT-01

Heater HMS-HNA-34660
Solenoid HMS-0005-KIT-04
Parts kit HMS-0005-KIT-03



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8504220**HMS-BC-130124000**

BCS-SURS-020-01-B-CA-000-T-BA-XXXX-N0-1

Body HMS-BC-100100000
Modules HMS-M-1052932-F100
Parts kit HMS-0005-KIT-03

Heater HMS-HNB-34626
Cordset T2K46M5S
Cover kit HMS-0005-KIT-01




Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8532174

HMS-BC-110125123

BCS-SURS-032-01-A-CA-000-T-BA-3A1A-F9-1

Body HMS-BC-100100000
Modules HMS-M-1056127-F100
Cordset T2K46M5S
Parts kit HMS-0005-KIT-03


Heater HMS-HNA-34660
Solenoid HMS-0005-KIT-04
Filter T10P72C1S
Cover kit HMS-0005-KIT-01



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns




DIRECT REPLACEMENT FOR NORDSON

8505905**HMS-BC-210121000**

BCM-CBRC-008-02-A-CA-022-T-RB-XXXX-N0-3

Body HMS-BC-200100000
Modules 2 x HMS-M-1052928-F200
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34662
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02





DIRECT REPLACEMENT FOR NORDSON

8505279**HMS-BC-210122000**

BCM-CBRC-012-02-A-CA-022-T-RB-XXXX-N0-3

Body HMS-BC-200100000
Modules 2 x HMS-M-1052929-F100
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34662
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02




DIRECT REPLACEMENT FOR NORDSON

8505945**HMS-BC-210222000**

BCM-CBRC-012-02-A-CA-025-T-RB-XXXX-N0-3

Body HMS-BC-200200000
Modules 2 x HMS-M-1052929-F100
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34662
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02




DIRECT REPLACEMENT FOR NORDSON

8505928**HMS-BC-310122000**

BCM-CBRC-012-03-A-CA-022-022-T-RB-XXXX-N0-3

Body HMS-BC-300100000
Modules 3 x HMS-M-1052929-F100
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34663
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02





DIRECT REPLACEMENT FOR NORDSON

8505952**HMS-BC-410422000**

BCM-CBRC-012-04-A-CA-022-038-022-T-RB-XXXX-N0-3

Body HMS-BC-400400000
Modules 4 x HMS-M-1052929-F100
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34675
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8505943**HMS-BC-210123000**

BCM-CBRC-016-02-A-CA-022-T-RB-XXXX-N0-3

Body HMS-BC-200100000
Modules 2 x HMS-M-1052931-F100
Parts kit HMS-0005-KIT-05


Heater HMS-HNA-34662
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns




DIRECT REPLACEMENT FOR NORDSON

8505954**HMS-BC-210423000**

BCM-CBRC-016-02-A-CA-038-T-RB-XXXX-N0-3

Body HMS-BC-200400000
Modules 2 x HMS-M-1052931-F100
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34663
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02




DIRECT REPLACEMENT FOR NORDSON

8505913**HMS-BC-211423000**

BCM-CBRC-016-02-A-IA-022-T-RB-XXXX-N0-3

Body HMS-BC-201400000
Modules 2 x HMS-M-1052931-F100
Parts kit HMS-0005-KIT-07

Heater HMS-HNA-34662
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02




DIRECT REPLACEMENT FOR NORDSON

8505955**HMS-BC-310123000**

BCM-CBRC-016-03-A-CA-022-022-T-RB-XXXX-N0-3

Body HMS-BC-300100000
Modules 3 x HMS-M-1052931-F100
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34663
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02




DIRECT REPLACEMENT FOR NORDSON

8505912**HMS-BC-410524000**

BCM-CBRC-020-04-A-CA-038-038-038-T-RB-XXXX-N0-3

Body HMS-BC-400500000
Modules 4 x HMS-M-1052932-F100
Parts kit HMS-0005-KIT-06

Heater HMS-HNA-35576
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON


8504842, 8504849**HMS-BC-210110000**

BCM-CBST-STD-02-A-CA-022-T-RB-XXXX-N0-3

Also built as BCM-SLBS-STD-02-A-CA-022-T-RB-XXXX-N0-3

Body HMS-BC-200100000
Modules 2 x T10F29B5S
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34662
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8505883**HMS-BC-220110000**

BCM-CBST-STD-02-A-CA-022-W-RB-XXXX-N0-3

Body HMS-BC-200100000
Modules 2 x T10F29B5S
Parts kit HMS-0005-KIT-05



Heater HMS-HNA-34662
Cordset T2B38P4S
Cover kit HMS-0005-KIT-02



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns




DIRECT REPLACEMENT FOR NORDSON

8505257**HMS-BC-210210000**

BCM-CBST-STD-02-A-CA-025-T-RB-XXXX-N0-3

Body HMS-BC-200200000
Modules 2 x T10F29B5S
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34662
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02




DIRECT REPLACEMENT FOR NORDSON

8505957**HMS-BC-210310000**

BCM-CBST-STD-02-A-CA-030-T-RB-XXXX-N0-3

Body HMS-BC-200300000
Modules 2 x T10F29B5S
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34662
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON


8504843, 8504855**HMS-BC-210410000**

BCM-CBST-STD-02-A-CA-038-T-RB-XXXX-N0-3

Also built as BCM-SLBS-STD-02-A-CA-038-T-RB-XXXX-N0-3

Body HMS-BC-200400000
Modules 2 x T10F29B5S
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34663
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02




DIRECT REPLACEMENT FOR NORDSON

8505930**HMS-BC-220710000**

BCM-CBST-STD-02-A-CA-059-W-RB-XXXX-N0-3

Body HMS-BC-200700000
Modules 2 x T10F29B5S
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34672
Cordset T2B38P4S
Cover kit HMS-0005-KIT-02




DIRECT REPLACEMENT FOR NORDSON

8505929**HMS-BC-210910000**

BCM-CBST-STD-02-A-CA-076-T-RB-XXXX-N0-3

Body HMS-BC-200900000
Modules 2 x T10F29B5S
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34673
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8519298**HMS-BC-211010123**

BCM-CBST-STD-02-A-CA-090-T-LB-3A1A-F9-3

Body HMS-BC-201000000
Modules 2 x T10F29B5S
Cordset T2K46M5S
Parts kit HMS-0005-KIT-05


Heater HMS-HNA-34676
Solenoid HMS-0005-KIT-04
Filter T10P72C1S
Cover kit HMS-0005-KIT-02



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



DIRECT REPLACEMENT FOR NORDSON

8505908, 8505903

HMS-BC-211210000

BCM-CBST-STD-02-A-CA-162-T-RB-XXXX-N0-5

Also built as BCM-SLBS-STD-02-A-CA-162-T-RB-XXXX-N0-5

Body HMS-BC-201200000


Heater HMS-HNA-34659

Modules 2 x T10F29B5S

Cordset T2K46M5S

Parts kit HMS-0005-KIT-06

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8504848

HMS-BC-211410000

BCM-CBST-STD-02-A-IA-022-T-RB-XXXX-N0-3

Body HMS-BC-201400000


Heater HMS-HNA-34662

Modules 2 x T10F29B5S

Cordset T2K46M5S

Parts kit HMS-0005-KIT-07

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8505981

HMS-BC-211610000

BCM-CBST-STD-02-A-IA-025-T-RB-XXXX-N0-3

Body HMS-BC-201600000


Heater HMS-HNA-34662

Modules 2 x T10F29B5S

Cordset T2K46M5S

Parts kit HMS-0005-KIT-07

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8505264, 8504924

HMS-BC-212110000

BCM-CBST-STD-02-A-IA-038-T-RB-XXXX-N0-3

Also built as BCM-SLBS-STD-02-A-IA-038-T-RB-XXXX-N0-3

Body HMS-BC-202100000


Heater HMS-HNA-34663

Modules 2 x T10F29B5S

Cordset T2K46M5S

Parts kit HMS-0005-KIT-07

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8505277

HMS-BC-230710000

BCM-CBST-STD-02-B-CA-059-T-RB-XXXX-N0-3

Body HMS-BC-200700000


Heater HMS-HNB-34633

Modules 2 x T10F29B5S

Cordset T2K46M5S

Parts kit HMS-0005-KIT-05

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8506429

HMS-BC-231110000

BCM-CBST-STD-02-B-CA-162-T-RB-XXXX-N0-3

Body HMS-BC-201100000

Heater HMS-HNB-34644

Modules 2 x T10F29B5S

Cordset T2K46M5S

Parts kit HMS-0005-KIT-06

Cover kit HMS-0005-KIT-02




Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8505901

HMS-BC-310110000


BCM-CBST-STD-03-A-CA-022-022-T-RB-XXXX-N0-3

Body HMS-BC-300100000
Modules 3 x T10F29B5S
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34663
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON


8505911

HMS-BC-310210000


BCM-CBST-STD-03-A-IA-022-022-T-RB-XXXX-N0-3

Body HMS-BC-300200000
Modules 3 x T10F29B5S
Parts kit HMS-0005-KIT-07

Heater HMS-HNA-34663
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8514708

HMS-BC-410110103


BCM-CBST-STD-04-A-CA-022-022-022-T-LB-3A1A-N9-3

Body HMS-BC-400100000
Modules 4 x T10F29B5S
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02

Heater HMS-HNA-34673
Solenoid HMS-0005-KIT-04
Parts kit HMS-0005-KIT-05



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8504867, 8505258

HMS-BC-410210000

BCM-CBST-STD-04-A-CA-022-022-022-T-RB-XXXX-N0-3


Also built as BCM-SLBS-STD-04-A-CA-022-022-022-T-RB-XXXX-N0-3

Body HMS-BC-400200000
Modules 4 x T10F29B5S
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34673
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8504840

HMS-BC-410410000


BCM-CBST-STD-04-A-CA-022-038-022-T-RB-XXXX-N0-3

Body HMS-BC-400400000
Modules 4 x T10F29B5S
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34675
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02



W cordset, 6 pin +
PE



DIRECT REPLACEMENT FOR NORDSON

8505925

HMS-BC-420410000

BCM-CBST-STD-04-A-CA-022-038-022-W-RB-XXXX-N0-3

Body HMS-BC-400400000
Modules 4 x T10F29B5S
Parts kit HMS-0005-KIT-05



Heater HMS-HNA-34675
Cordset T2B38P4S
Cover kit HMS-0005-KIT-02



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



DIRECT REPLACEMENT FOR NORDSON

8516797**HMS-BC-410610103**

BCM-CBST-STD-04-A-CA-041-059-041-T-LB-3A1A-N9-3

Body HMS-BC-400600000

Modules 4 x T10F29B5S


Cordset T2K46M5S

Cover kit HMS-0005-KIT-02

Heater HMS-HNA-34677

Solenoid HMS-0005-KIT-04

Parts kit HMS-0005-KIT-06



DIRECT REPLACEMENT FOR NORDSON

8504851**HMS-BC-410710000**

BCM-CBST-STD-04-A-CA-041-059-041-T-RB-XXXX-N0-5

Body HMS-BC-400700000


Modules 4 x T10F29B5S

Parts kit HMS-0005-KIT-06

Heater HMS-HNA-34677

Cordset T2K46M5S

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8505950**HMS-BC-410810000**

BCM-CBST-STD-04-A-IA-022-022-022-T-RB-XXXX-N0-3

Body HMS-BC-400800000


Modules 4 x T10F29B5S

Parts kit HMS-0005-KIT-07

Heater HMS-HNA-34673

Cordset T2K46M5S

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8505260**HMS-BC-410910000**

BCM-CBST-STD-04-A-IA-030-030-030-T-RB-XXXX-N0-3

Body HMS-BC-400900000


Modules 4 x T10F29B5S

Parts kit HMS-0005-KIT-07

Heater HMS-HNA-34676

Cordset T2K46M5S

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8505278**HMS-BC-430410000**

BCM-CBST-STD-04-B-CA-022-038-022-T-RB-XXXX-N0-3

Body HMS-BC-400400000


Modules 4 x T10F29B5S

Parts kit HMS-0005-KIT-05

Heater HMS-HNB-34635

Cordset T2K46M5S

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8506349**HMS-BC-510110000**

BCM-CBST-STD-05-A-CA-022-022-022-T-RB-XXXX-N0-3

Body HMS-BC-500100000

Modules 5 x T10F29B5S

Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34675

Cordset T2K46M5S


Cover kit HMS-0005-KIT-02



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



DIRECT REPLACEMENT FOR NORDSON


8505914

HMS-BC-210132000

BCM-CBZC-012-02-A-CA-022-T-RB-XXXX-N0-3

Body HMS-BC-200100000
Modules 2 x HMS-M-1052929-F100
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34662
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON


8505904

HMS-BC-210732000

BCM-CBZC-012-02-A-CA-059-T-RB-XXXX-N0-3

Body HMS-BC-200700000
Modules 2 x HMS-M-1052929-F100
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34672
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON



8507355

HMS-BC-221432000

BCM-CBZC-012-02-A-IA-022-W-RB-XXXX-N0-3

Body HMS-BC-201400000
Modules 2 x HMS-M-1052929-F100
Parts kit HMS-0005-KIT-07

Heater HMS-HNA-34662
Cordset T2B38P4S
Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8505946

HMS-BC-210133000

BCM-CBZC-016-02-A-CA-022-T-RB-XXXX-N0-3

Body HMS-BC-200100000
Modules 2 x HMS-M-1052931-F100
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34662
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON



8509276

HMS-BC-210110122

BCM-SLBS-STD-02-A-CA-022-T-RB-3A1A-F4-3

Body HMS-BC-200100000
Modules 2 x T10F29B5S
Cordset T2K46M5S
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34662
Solenoid HMS-0005-KIT-04
Filter T10P72C4S
Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8514647

HMS-BC-210110123

BCM-SLBS-STD-02-A-CA-022-T-RB-3A1A-F9-3

Body HMS-BC-200100000
Modules 2 x T10F29B5S
Cordset T2K46M5S
Parts kit HMS-0005-KIT-05


Heater HMS-HNA-34662
Solenoid HMS-0005-KIT-04
Filter T10P72C1S
Cover kit HMS-0005-KIT-02



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns

W cordset, 6 pin +
PE

DIRECT REPLACEMENT FOR NORDSON

8509277**HMS-BC-220110122**

BCM-SLBS-STD-02-A-CA-022-W-RB-3A1A-F4-3

Body HMS-BC-200100000

Modules 2 x T10F29B5S

Cordset T2B38P4S

Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34662


Solenoid HMS-0005-KIT-04

Filter T10P72C4S

Cover kit HMS-0005-KIT-02



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8504841**HMS-BC-210710000**

BCM-SLBS-STD-02-A-CA-059-T-RB-XXXX-N0-3

Body HMS-BC-200700000

Modules 2 x T10F29B5S

Parts kit HMS-0005-KIT-05


Heater HMS-HNA-34672

Cordset T2K46M5S

Cover kit HMS-0005-KIT-02



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8515851**HMS-BC-210810133**

BCM-SLBS-STD-02-A-CA-075-T-LB-3A1A-G9-3

Body HMS-BC-200800000

Modules 2 x T10F29B5S

Cordset T2K46M5S

Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34673


Solenoid HMS-0005-KIT-04

Filter T10P72C2S

Cover kit HMS-0005-KIT-02



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8515967**HMS-BC-210810103**

BCM-SLBS-STD-02-A-CA-075-T-LB-3A1A-N9-3

Body HMS-BC-200800000

Modules 2 x T10F29B5S

Cordset T2K46M5S

Cover kit HMS-0005-KIT-02


Heater HMS-HNA-34673

Solenoid HMS-0005-KIT-04

Parts kit HMS-0005-KIT-05



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8506782**HMS-BC-211310000**

BCM-SLBS-STD-02-A-IA-022-T-LB-XXXX-N0-3

Body HMS-BC-201300000

Modules 2 x T10F29B5S

Parts kit HMS-0005-KIT-07


Heater HMS-HNA-34662

Cordset T2K46M5S

Cover kit HMS-0005-KIT-02



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8522108**HMS-BC-211410122**

BCM-SLBS-STD-02-A-IA-022-T-RB-3A1A-F4-3

Body HMS-BC-201400000

Modules 2 x T10F29B5S

Cordset T2K46M5S

Parts kit HMS-0005-KIT-07

Heater HMS-HNA-34662

Solenoid 2 x HMS-0005-KIT-04

Filter T10P72C4S


Cover kit HMS-0005-KIT-02



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



DIRECT REPLACEMENT FOR NORDSON

8524305**HMS-BC-211710122**

BCM-SLBS-STD-02-A-IA-028-T-LB-3A1A-F4-3

Body HMS-BC-201700000

Modules 2 x T10F29B5S

Cordset T2K46M5S


Parts kit HMS-0005-KIT-07

Heater HMS-HNA-34662

Solenoid 2 x HMS-0005-KIT-04

Filter T10P72C4S

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8524306**HMS-BC-211710123**

BCM-SLBS-STD-02-A-IA-028-T-LB-3A1A-F9-3

Body HMS-BC-201700000

Modules 2 x T10F29B5S

Cordset T2K46M5S



Parts kit HMS-0005-KIT-07

Heater HMS-HNA-34662

Solenoid 2 x HMS-0005-KIT-04

Filter T10P72C1S

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8523609**HMS-BC-211810122**

BCM-SLBS-STD-02-A-IA-035-T-LB-3A1A-F4-3

Body HMS-BC-201800000

Modules 2 x T10F29B5S

Cordset T2K46M5S


Parts kit HMS-0005-KIT-07

Heater HMS-HNA-34662

Solenoid 2 x HMS-0005-KIT-04

Filter T10P72C4S

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8524307**HMS-BC-211810123**

BCM-SLBS-STD-02-A-IA-035-T-LB-3A1A-F9-3

Body HMS-BC-201800000

Modules 2 x T10F29B5S

Cordset T2K46M5S


Parts kit HMS-0005-KIT-07

Heater HMS-HNA-34662

Solenoid 2 x HMS-0005-KIT-04

Filter T10P72C1S

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8524308**HMS-BC-212210122**

BCM-SLBS-STD-02-A-IA-042-T-LB-3A1A-F4-3

Body HMS-BC-202200000

Modules 2 x T10F29B5S

Cordset T2K46M5S



Parts kit HMS-0005-KIT-07

Heater HMS-HNA-34663

Solenoid 2 x HMS-0005-KIT-04

Filter T10P72C4S

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8522524**HMS-BC-212210123**

BCM-SLBS-STD-02-A-IA-042-T-LB-3A1A-F9-3

Body HMS-BC-202200000

Modules 2 x T10F29B5S

Cordset T2K46M5S

Parts kit HMS-0005-KIT-07

Heater HMS-HNA-34663

Solenoid 2 x HMS-0005-KIT-04

Filter T10P72C1S


Cover kit HMS-0005-KIT-02



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



DIRECT REPLACEMENT FOR NORDSON

8511813

HMS-BC-410210123

BCM-SLBS-STD-04-A-CA-022-022-022-T-RB-3A1A-F9-3

Body HMS-BC-400200000

Modules 4 x T10F29B5S

Cordset T2K46M5S


Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34673

Solenoid HMS-0005-KIT-04

Filter T10P72C1S

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8521716

HMS-BC-410410103

BCM-SLBS-STD-04-A-CA-022-038-022-T-RB-3A1A-N9-3

Body HMS-BC-400400000

Modules 4 x T10F29B5S


Cordset T2K46M5S

Cover kit HMS-0005-KIT-02

Heater HMS-HNA-34675

Solenoid HMS-0005-KIT-04

Parts kit HMS-0005-KIT-05



DIRECT REPLACEMENT FOR NORDSON

8527699

HMS-BC-411010613

BCM-SLBS-STD-04-A-PA-022-022-022-T-RB-4A1A-E9-3

Body HMS-BC-401000000

Modules 4 x T10F29B5S

Cordset T2K46M5S


Parts kit HMS-0005-KIT-07

Heater HMS-HNA-34673

Solenoid 2 x HMS-0005-KIT-04

Filter T10P72C0S

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8527253

HMS-BC-430110123

BCM-SLBS-STD-04-B-CA-022-022-022-T-LB-3A1A-F9-3

Body HMS-BC-400100000

Modules 4 x T10F29B5S

Cordset T2K46M5S


Parts kit HMS-0005-KIT-05

Heater HMS-HNB-34634

Solenoid HMS-0005-KIT-04

Filter T10P72C1S

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8509363

HMS-BC-210122122

BCM-SURS-012-02-A-CA-022-T-RB-3A1A-F4-3

Body HMS-BC-200100000

Modules 2 x HMS-M-1052929-F100

Cordset T2K46M5S


Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34662

Solenoid HMS-0005-KIT-04

Filter T10P72C4S

Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON

8515786

HMS-BC-210122123

BCM-SURS-012-02-A-CA-022-T-RB-3A1A-F9-3

Body HMS-BC-200100000

Modules 2 x HMS-M-1052929-F100

Cordset T2K46M5S

Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34662

Solenoid HMS-0005-KIT-04

Filter T10P72C1S


Cover kit HMS-0005-KIT-02



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



DIRECT REPLACEMENT FOR NORDSON


8518007

HMS-BC-211922100

BCM-SURS-012-02-A-IA-035-T-RB-3A1A-N0-3

Body HMS-BC-201900000
Modules 2 x HMS-M-1052929-F100
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02

Heater HMS-HNA-34662
Solenoid 2 x HMS-0005-KIT-04
Parts kit HMS-0005-KIT-07



DIRECT REPLACEMENT FOR NORDSON



8516296

HMS-BC-410222122

BCM-SURS-012-04-A-CA-022-022-022-T-RB-3A1A-F4-3

Body HMS-BC-400200000
Modules 4 x HMS-M-1052929-F100
Cordset T2K46M5S
Parts kit HMS-0005-KIT-05

Heater HMS-HNA-34673
Solenoid HMS-0005-KIT-04
Filter T10P72C4S
Cover kit HMS-0005-KIT-02



DIRECT REPLACEMENT FOR NORDSON


8517791

HMS-BC-210523102

BCM-SURS-016-02-A-CA-040-T-LB-3A1A-N4-3

Body HMS-BC-200500000
Modules 2 x HMS-M-1052931-F100
Cordset T2K46M5S
Cover kit HMS-0005-KIT-02

Heater HMS-HNA-34663
Solenoid HMS-0005-KIT-04
Parts kit HMS-0005-KIT-05



DIRECT REPLACEMENT FOR NORDSON

8524017

HMS-BC-510223122

BCM-SURS-016-05-A-PA-022-022-022-022-T-RB-3A1A-F4-3

Body HMS-BC-500200000
Modules 5 x HMS-M-1052931-F100
Cordset T2K46M5S
Parts kit HMS-0005-KIT-07

Heater HMS-HNA-34675
Solenoid 3 x HMS-0005-KIT-04
Filter T10P72C4S
Cover kit HMS-0005-KIT-02




Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8518541**HMS-MB-110110322**


MB2-BEL-STD-01-A-IA-000-T-LB-SD-F4-3

Body HMS-MB-100100000
Modules HMS-M-1095703
Cordset T2K46M5S

Heater HMS-HNA-28123
Solenoid T7K14F8S
Filter T10P72C4S



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8518151**HMS-MB-110110222**


MB2-BEL-STD-01-A-IA-000-T-LB-SP-F4-3

Body HMS-MB-100100000
Modules HMS-M-1095703
Cordset T2K46M5S

Heater HMS-HNA-28123
Solenoid T10N58P0S
Filter T10P72C4S



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8527886**HMS-MB-110210220**


MB2-BEL-STD-01-A-IA-000-T-RB-SP-F0-3

Body HMS-MB-100200000
Modules HMS-M-1095703
Cordset T2K46M5S

Heater HMS-HNA-28123
Solenoid T10N58P0S
Filter T10P70C4S



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8527362**HMS-MB-110210222**


MB2-BEL-STD-01-A-IA-000-T-RB-SP-F4-3

Body HMS-MB-100200000
Modules HMS-M-1095703
Cordset T2K46M5S

Heater HMS-HNA-28123
Solenoid T10N58P0S
Filter T10P72C4S



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8526667**HMS-MB-210210222**


MB2-BEL-STD-02-A-CA-016-T-RB-SP-F4-3

Body HMS-MB-200200000
Modules 2 x HMS-M-1095703
Cordset T2K46M5S

Heater HMS-HNA-28123
Solenoid T11B08B6S
Filter T10P72C4S



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8518303**HMS-MB-210610222**

MB2-BEL-STD-02-A-IA-016-T-RB-SP-F4-3

Body HMS-MB-200600000
Modules 2 x HMS-M-1095703
Cordset T2K46M5S


Heater HMS-HNA-28123
Solenoid 2 x T10N58P0S
Filter T10P72C4S



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



DIRECT REPLACEMENT FOR NORDSON


8517930

HMS-MB-210710222

MB2-BEL-STD-02-A-IA-022-T-LB-SP-F4-3

Body HMS-MB-200700000
Modules 2 x HMS-M-1095703
Cordset T2K46M5S

Heater HMS-HNA-28123
Solenoid 2 x T10N58P0S
Filter T10P72C4S



DIRECT REPLACEMENT FOR NORDSON



8530475

HMS-MB-450110222

MB2-BEL-STD-04-A-CA-020-020-020-F-RB-SP-F4-3

Body HMS-MB-400100000
Modules 4 x HMS-M-1095703
Cordset T2B38P4S

Heater HMS-HNA-21662
Solenoid T11B08B6S
Filter T10P72C4S



DIRECT REPLACEMENT FOR NORDSON


8507901

HMS-MB-210621022

MB2-NC-008-02-A-IA-016-T-RB-XX-F4-3

Body HMS-MB-200600000
Modules 2 x HMS-M-1121479
Filter T10P72C4S

Heater HMS-HNA-28123
Cordset T2K46M5S



DIRECT REPLACEMENT FOR NORDSON


8527725

HMS-MB-150122222

MB2-NC-012-01-A-IA-000-F-LB-SP-F4-3

Body HMS-MB-100100000
Modules HMS-M-1121480
Cordset T2B38P4S

Heater HMS-HNA-28123
Solenoid T10N58P0S
Filter T10P72C4S



DIRECT REPLACEMENT FOR NORDSON


8529386

HMS-MB-250122220

MB2-NC-012-02-A-CA-016-F-LS-SP-F0-3

Body HMS-MB-200100000
Modules 2 x HMS-M-1121480
Cordset T2B38P4S

Heater HMS-HNA-28123
Solenoid T11B08B6S
Filter T10P70C4S



DIRECT REPLACEMENT FOR NORDSON

8529387

HMS-MB-250222220

MB2-NC-012-02-A-CA-016-F-RS-SP-F0-3

Body HMS-MB-200200000
Modules 2 x HMS-M-1121480
Cordset T2B38P4S

Heater HMS-HNA-28123
Solenoid T11B08B6S
Filter T10P70C4S




Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



F cordset, 6 pin +
PE



DIRECT REPLACEMENT FOR NORDSON


8530169

HMS-MB-350122222


MB2-NC-012-03-A-CA-016-016-F-LB-SP-F4-3

Body HMS-MB-300100000
Modules 3 x HMS-M-1121480
Cordset T2B38P4S

Heater HMS-HNA-28841
Solenoid T11B08B6S
Filter T10P72C4S



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8528045

HMS-MB-210623222

MB2-NC-016-02-A-IA-016-T-RB-SP-F4-3

Body HMS-MB-200600000
Modules 2 x HMS-M-1121481
Cordset T2K46M5S


Heater HMS-HNA-28123
Solenoid 2 x T10N58P0S
Filter T10P72C4S



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



DIRECT REPLACEMENT FOR NORDSON


8527257, 1121675

HMS-MB-150310222

MB2-BEL-STD-01-A-IA-000-F-TS-SP-F4-1

Body HMS-MB-100300000
Solenoid T10N58P0S
Modules T11B36H2S

Modules HMS-M-1095703
Heater and cordset HMS-C-1130868



DIRECT REPLACEMENT FOR NORDSON


8533139

HMS-MB-110310422

MB2-BEL-STD-01-A-IA-000-T-TS-P1-F4-1

Body HMS-MB-100300000
Solenoid T11B39A0S
Modules T11B36H2S

Modules HMS-M-1095703
Heater and cordset HMS-C-1130591



DIRECT REPLACEMENT FOR NORDSON


8517894, 8517921

HMS-MB-110310322

MB2-BEL-STD-01-A-IA-000-T-TS-SD-F4-1

Body HMS-MB-100300000
Solenoid T7K14F8S
Modules T11B36H2S

Modules HMS-M-1095703
Heater and cordset HMS-C-1130591



DIRECT REPLACEMENT FOR NORDSON


8518963

HMS-MB-110310332

MB2-BEL-STD-01-A-IA-000-T-TS-SD-G4-1

Body HMS-MB-100300000
Solenoid T7K14F8S
Modules T11B36H3S

Modules HMS-M-1095703
Heater and cordset HMS-C-1130591



DIRECT REPLACEMENT FOR NORDSON


8517895, 8517923

HMS-MB-110310222

MB2-BEL-STD-01-A-IA-000-T-TS-SP-F4-1

Body HMS-MB-100300000
Solenoid T10N58P0S
Modules T11B36H2S

Modules HMS-M-1095703
Heater and cordset HMS-C-1130591



DIRECT REPLACEMENT FOR NORDSON

8518149

HMS-MB-110310232

MB2-BEL-STD-01-A-IA-000-T-TS-SP-G4-1

Body HMS-MB-100300000
Solenoid T10N58P0S
Modules T11B36H3S


Modules HMS-M-1095703
Heater and cordset HMS-C-1130591



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.




Quick Ship - Preconfigured Guns

W cordset, 6 pin +
PE

DIRECT REPLACEMENT FOR NORDSON

8534865**HMS-MB-120310420**

MB2-BEL-STD-01-A-IA-000-W-TS-P1-F0-1

Body HMS-MB-100300000
Solenoid T11B39A0S
Modules T11B36H2SModules HMS-M-1095703
Heater and cordset HMS-C-1130868W cordset, 6 pin +
PE


DIRECT REPLACEMENT FOR NORDSON

8517901**HMS-MB-120310222**

MB2-BEL-STD-01-A-IA-000-W-TS-SP-F4-1

Body HMS-MB-100300000
Solenoid T10N58P0S
Modules T11B36H2SModules HMS-M-1095703
Heater and cordset HMS-C-1130868

T cordset, 6 pin




DIRECT REPLACEMENT FOR NORDSON

8529010**HMS-MB-110321332**

MB2-NC-008-01-A-IA-000-T-TS-SD-G4-1

Body HMS-MB-100300000
Solenoid T7K14F8S
Modules T11B36H3SModules HMS-M-1121479
Heater and cordset HMS-C-1130591

T cordset, 6 pin




DIRECT REPLACEMENT FOR NORDSON

8527491**HMS-MB-110321222**

MB2-NC-008-01-A-IA-000-T-TS-SP-F4-1

Body HMS-MB-100300000
Solenoid T10N58P0S
Modules T11B36H2SModules HMS-M-1121479
Heater and cordset HMS-C-1130591

T cordset, 6 pin




DIRECT REPLACEMENT FOR NORDSON

8527356**HMS-MB-110321232**

MB2-NC-008-01-A-IA-000-T-TS-SP-G4-1

Body HMS-MB-100300000
Solenoid T10N58P0S
Modules T11B36H3SModules HMS-M-1121479
Heater and cordset HMS-C-1130591

T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON


8529005**HMS-MB-110321233**

MB2-NC-008-01-A-IA-000-T-TS-SP-G9-1

Body HMS-MB-100300000
Solenoid T10N58P0S
Modules T11B36H3SModules HMS-M-1121479
Heater and cordset HMS-C-1130591**Not finding what you need?** We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns

F cordset, 6 pin +
PE


DIRECT REPLACEMENT FOR NORDSON

8527271**HMS-MB-150322222**

MB2-NC-012-01-A-IA-000-F-TS-SP-F4-1

Body HMS-MB-100300000
Solenoid T10N58P0S
Modules T11B36H2SModules HMS-M-1121480
Heater and cordset HMS-C-1130868

T cordset, 6 pin




DIRECT REPLACEMENT FOR NORDSON

8529304**HMS-MB-110322332**

MB2-NC-012-01-A-IA-000-T-TS-SD-G4-1

Body HMS-MB-100300000
Solenoid T7K14F8S
Modules T11B36H3SModules HMS-M-1121480
Heater and cordset HMS-C-1130591


T cordset, 6 pin




DIRECT REPLACEMENT FOR NORDSON

8527355**HMS-MB-110322222**

MB2-NC-012-01-A-IA-000-T-TS-SP-F4-1

Body HMS-MB-100300000
Solenoid T10N58P0S
Modules T11B36H2SModules HMS-M-1121480
Heater and cordset HMS-C-1130591



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8529257**HMS-MB-110322232**

MB2-NC-012-01-A-IA-000-T-TS-SP-G4-1

Body HMS-MB-100300000
Solenoid T10N58P0S
Modules T11B36H3SModules HMS-M-1121480
Heater and cordset HMS-C-1130591W cordset, 6 pin +
PE


DIRECT REPLACEMENT FOR NORDSON

8527975**HMS-MB-120322222**

MB2-NC-012-01-A-IA-000-W-TS-SP-F4-1

Body HMS-MB-100300000
Solenoid T10N58P0S
Modules T11B36H2SModules HMS-M-1121480
Heater and cordset HMS-C-1130868

T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8527504**HMS-MB-110323222**

MB2-NC-016-01-A-IA-000-T-TS-SP-F4-1


Body HMS-MB-100300000
Solenoid T10N58P0S
Modules T11B36H2SModules HMS-M-1121481
Heater and cordset HMS-C-1130591**Not finding what you need?** We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Quick Ship - Preconfigured Guns



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8527505

HMS-MB-110324222


MB2-NC-020-01-A-IA-000-T-TS-SP-F4-1

Body HMS-MB-100300000
Solenoid T10N58P0S
Modules T11B36H2S

Modules HMS-M-1121482
Heater and cordset HMS-C-1130591



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8528883

HMS-MB-130324222


MB2-NC-020-01-B-IA-000-T-TS-SP-F4-1

Body HMS-MB-100300000
Solenoid T10N58P0S
Modules T11B36H2S

Modules HMS-M-1121482
Heater and cordset HMS-C-1130591



T cordset, 6 pin



DIRECT REPLACEMENT FOR NORDSON

8527494

HMS-MB-110325222

MB2-NC-032-01-A-IA-000-T-TS-SP-F4-1

Body HMS-MB-100300000
Solenoid T10N58P0S
Modules T11B36H2S

Modules HMS-M-1121483
Heater and cordset HMS-C-1130591



Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



AD41 AND AD31 STYLE HANDGUNS

Hand Held Applicators

Gun Identification and Configuration Guide



**AD41 style handgun,
bottom feed**
T3P69F7S
Replaces Nordson 306957
240 V



**AD41 style handgun,
top feed**
T3P69M8S
Replaces Nordson 306988
240 V



**AD41 style handgun,
bottom feed**
T3P69H3S
Replaces Nordson 306963
120 V



**AD41 style handgun,
top feed**
T3P69N0S
Replaces Nordson 306990
120 V



AD31 style handgun
T2K47H5S
Replaces Nordson 274765
240 V



AD31 style handgun
T2K60B8S
Replaces Nordson 276028
120 V



AD31 style handgun
T3P77A2S
Replaces Nordson 307712
115 V



**AD31 swirl spray
handgun, integrated
air valve**
T1P12P6S
Replaces Nordson 101206



AD41 handguns use AD41 hand gun hoses (9 pin round connector and pump start switch). AD31 handguns use AD31 hand gun hoses (flying leads). Match the handgun voltage to the hose and melter. See the hose chapter for hoses and wiring.

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.



Notes

