

Quickly attaches through the latch to Round or WEB SLING

Forged cover on hook body protects the latch against snagging



**RH**

Heat number identification allows full product traceability.

Large throat opening for hooking to large objects.




**OKE**

## SLING HOOK - RH

Stock No.	Model	Grade	Working Load Limit *(Lbs)	Dimensions (Inches)							Weight Each (Lbs.)
				L	B	D	G	H	M	T	
589588	RH-1-10	100	2,200	4.6	0.94	1.4	3.3	2.9	0.31	0.67	0.88
589590	RH-2-10	100	4,400	5.4	1.1	1.6	3.8	3.4	0.39	0.67	1.5
589591	RH-3-10	100	6,600	6.6	1.3	1.9	4.6	4.3	0.47	0.94	3.1
589592	RH-5-10	100	11,000	8.7	1.7	2.9	6.1	5.2	0.65	1.06	7.1

\* Design Factor 5:1 Proof tested and certified.

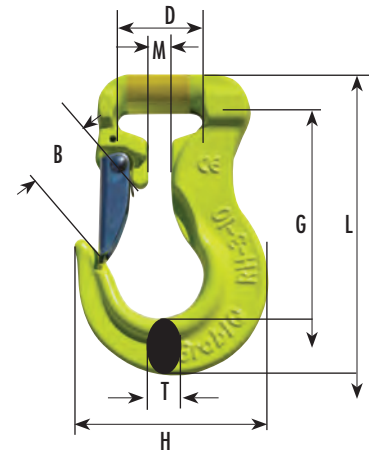


## FOUNDRY HOOKS - OKE (EYE TYPE)

Stock No.	Model	Chain Size In.	Grade	Working Load Limit *(Lbs)	Dimensions (Inches)							Weight Each (Lbs.)
					L	B	E	F	G	H		
589725	OKE-7/8-10	9/32"	100	4,300	4.8	2.5	1.1	0.45	0.79	1.0	1.5	
589725	OKE-7/8-10	5/16"	100	5,700	4.8	2.5	1.1	0.45	0.79	1.0	1.5	
589727	OKE-10-10	3/8"	100	8,800	5.9	3.0	1.3	0.59	1.0	1.1	2.9	
589728	OKE-13-10	1/2"	100	15,000	7.2	3.5	1.7	0.75	1.3	1.5	6.2	
589729	OKE-16-10	5/8"	100	22,600	8.5	4.0	2.2	0.91	1.6	1.8	10.8	
589731	OKE-20-10	3/4"	100	35,300	9.7	4.5	2.4	1.1	1.8	2.4	15.9	
589732	OKE-22-10	7/8"	100	42,700	10.8	4.7	2.5	1.2	2.4	2.8	24.9	
589733	OKE-26-10	1"	100	59,700	11.8	4.4	2.8	1.38	2.5	3.0	35.3	
545467**	OKE-32-8	1 1/4"	80	72,300	15.1	5.7	3.5	1.7	3.0	3.7	67.0	

\* Design Factor 4:1 Proof tested and certified.

\*\* Available only in the traditional Classic yellow color

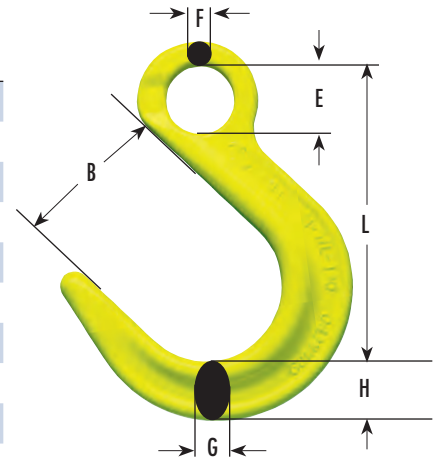

**WESTECH RIGGING SUPPLY**  
Call Toll Free: 800-442-7475

Call Us or Visit Our Stores:  
Monday - Friday, 8:00am - 5:30pm Pacific



Distributed By

Visit Us Online at: [www.WestechRigging.com](http://www.WestechRigging.com)

4140 West 11th Avenue  
Eugene, Oregon 97402

2439 McGilchrist St SE  
Salem, Oregon 97302



SEE WARNINGS AND USE LIMITATIONS ON PAGES 26-36