

Distributed By

WESTECH RIGGING SUPPLY

Visit Us Online at: www.WestechRigging.com

Call Us Toll Free at: 800-442-7475


Call Us or Visit Our Stores: Monday - Friday, 8:00am - 5:30pm Pacific

4140 West 11th Avenue

Eugene, Oregon 97402

2439 McGilchrist St SE

Salem, Oregon 97302

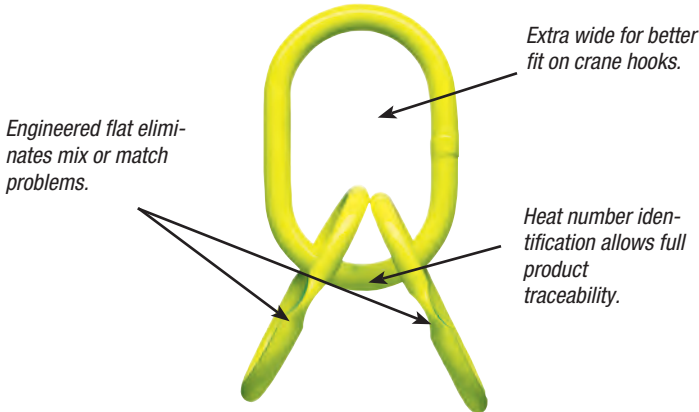

MT

TYPE MT MASTER LINK SELECTION TABLE FOR GRADE 80 ALLOY CHAIN SLINGS WITH 3 OR 4 LEGS

Stock No.	MASTER LINK TRADE SIZE		MODEL	Chain Size 3 OR 4 LEG 60°		Working Load Limit (Lbs)*
	IN	MM		IN	MM	
589630	3/4	19	MT-6-10 **	7/32	6	5,450
589631	7/8	22	MT-8-10 **	9/32"	7	9,100
589631	7/8	22	MT-8-10 **	5/16"	8	11,700
589632	1	25	MT-9-10 **	3/8"	10	18,400
589633	1 1/4	30	MT-10-10 **	1/2"	13	31,200
589634	1 5/8	40	MT-13-10 **	5/8"	16	47,000
589635	2	50	MT-16-10 **	3/4"	20	73,500
589636	2 1/4	55	MT-20-10 **	7/8"	22	88,900
589637	2 1/2	60	MT-22-10	1"	26	123,900
589638	2 3/4	70	MT-26-10	1 1/4"	32	187,800
589639	3 1/4	80	MT-32-10	1 1/4"	32	187,800

* Design factor 4:1

** Subassemblies have engineered flats

TYPE MT MASTER LINK SELECTION TABLE FOR GRADE 100 ALLOY CHAIN SLINGS WITH 3 OR 4 LEGS

Stock No.	MASTER LINK TRADE SIZE		MODEL	Chain Size 3 OR 4 LEG 60°		Working Load Limit (Lbs)*
	IN	MM		IN	MM	
589630	3/4	19	MT-6-10 **	7/32	6	7,000
589631	7/8	22	MT-8-10 **	9/32"	7	11,200
589632	7/8	22	MT-8-10 **	5/16"	8	14,800
589633	1 1/4	30	MT-10-10 **	3/8"	10	22,900
589634	1 5/8	40	MT-13-10 **	1/2"	13	39,000
589635	2	50	MT-16-10 **	5/8"	16	58,700
589636	2 1/4	55	MT-20-10 **	3/4"	20	91,700
589637	2 1/2	60	MT-22-10	7/8"	22	110,900
589638	2 3/4	70	MT-26-10	1"	26	155,100


* Design factor 4:1

** Subassemblies have engineered flats

CLEVIS GRAB HOOKS - GG (CRADLE TYPE)

Stock No.	Model	Chain Size In.	Grade	Working Load Limit *(Lbs)	Dimensions (Inches)		Weight Each (Lbs.)
					L	B	
589685	GG-7-10	9/32"	100	4,300	2.2	0.39	0.66
589687	GG-8-10	5/16"	100	5,700	2.2	0.41	0.88
589688	GG-10-10	3/8"	100	8,800	3.3	0.47	2.0
589689	GG-13-10	1/2"	100	15,000	3.8	0.63	4.0
589690	GG-16-10	5/8"	100	22,600	4.9	0.79	6.8
589692	GG-20-10	3/4"	100	35,300	5.8	1.0	15.4

* Design Factor 4:1 Proof tested and certified.

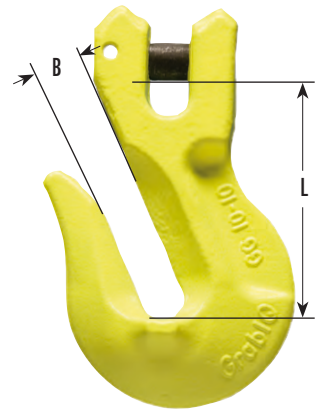


Clevis prevents hook to chain size mismatch.

Deep chain pocket

No reduction of working load limit due to supporting cross bar in saddle of hook.

Heat number identification allows full product traceability.

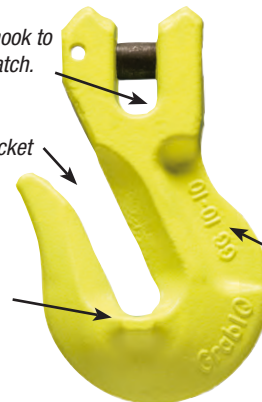

GG



SEE WARNINGS AND USE LIMITATIONS ON PAGES 26-36