

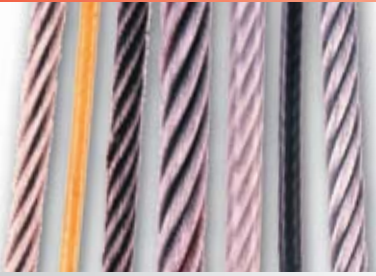


Specialty Wire Rope




19X7 Non-Rotating

Size (in)	Approx. Wt per ft (lbs)	Nominal Breaking Load (lbs)	
		I. P. S.	E. I. P. S.
3/8	0.18	11,520	13,260
7/16	0.26	15,600	17,940
1/2	0.45	19,700	21,600
9/16	0.58	24,800	27,200
5/8	0.71	30,600	33,600
3/4	1.02	43,600	48,000
7/8	1.39	59,000	65,000
1	1.82	76,600	84,400
1 1/8	2.30	96,400	106,200
1 1/4	2.84	118,400	130,200
1 3/8	3.43	142,600	156,800
1 1/2	4.08	168,800	185,600


8X19 Rotation Resistant

Size (in)	Approx. Wt per ft (lbs)	Nominal Breaking Load (lbs)	
		I. P. S.	E. I. P. S.
3/8	0.26	11,520	13,260
7/16	0.36	15,600	17,940
1/2	0.47	20,200	23,200
9/16	0.60	25,600	29,400
5/8	0.73	31,400	36,200
3/4	1.06	45,000	51,800
7/8	1.44	61,000	70,000
1	1.88	79,200	91,000
1 1/8	2.39	99,600	114,600
1 1/4	2.94	112,600	141,000
1 3/8	3.56	147,600	169,800
1 1/2	4.24	174,600	200,000



7X7X7 Galvanized Cablelaid

Size (in)	Approx. Weight (lbs/ft)	Nominal Breaking Load (lbs)		
		Grade A	Grade B	Grade C
5/16	0.135	6,490	7,080	7,670
3/8	0.195	9,350	10,200	11,100
7/16	0.273	12,900	14,100	15,200
1/2	0.346	16,400	17,900	19,400
9/16	0.446	21,100	23,000	24,900
5/8	0.558	26,500	28,900	31,300
3/4	0.786	37,300	40,700	44,100
7/8	1.093	51,800	56,500	61,200
1	1.405	66,600	72,600	78,700
1-1/8	1.781	84,200	91,900	99,500
1-1/4	2.230	105,600	115,200	124,800
1-5/16	2.517	119,000	129,800	140,600
1-3/8	2.668	126,300	137,800	149,300
1-7/16	2.882	133,600	145,700	157,900
1-1/2	3.145	148,800	162,300	175,900



7X7X19 Galvanized Cablelaid

Size (in)	Approx Weight (lbs/ft)	Breaking Load (lbs)		
		Grade A	Grade B	Grade C
3/8	0.195	9,100	9,900	10,800
7/16	0.270	12,700	13,900	15,000
1/2	0.341	16,100	17,600	19,100
9/16	0.440	20,700	22,600	24,500
5/8	0.550	26,000	28,400	30,700
3/4	0.776	36,600	39,900	43,300
7/8	1.079	50,700	55,300	59,900
1	1.387	65,300	71,200	77,200
1-1/8	1.759	82,900	90,400	98,000
1-1/4	2.202	103,600	113,000	122,400
1-5/16	2.486	117,100	127,700	138,400
1-3/8	2.634	124,100	135,400	146,700
1-7/16	2.787	131,200	143,100	155,100
1-1/2	3.105	146,200	159,500	172,800
1-9/16	3.440	162,000	176,700	191,500

