


60' Technora® Rope Personnel Winch

Single user mechanical winch for entering and exiting confined spaces features an internal braking system, including a secondary brake for redundancy. Includes integral mounting bracket for Davit and Tripod installation.

Technora® Rope:

- 8 times stronger than steel
- High temperature resistance (500 degrees F)
- UV-resistant urethane coating
- Negligible creep and elongation
- High chemical resistance

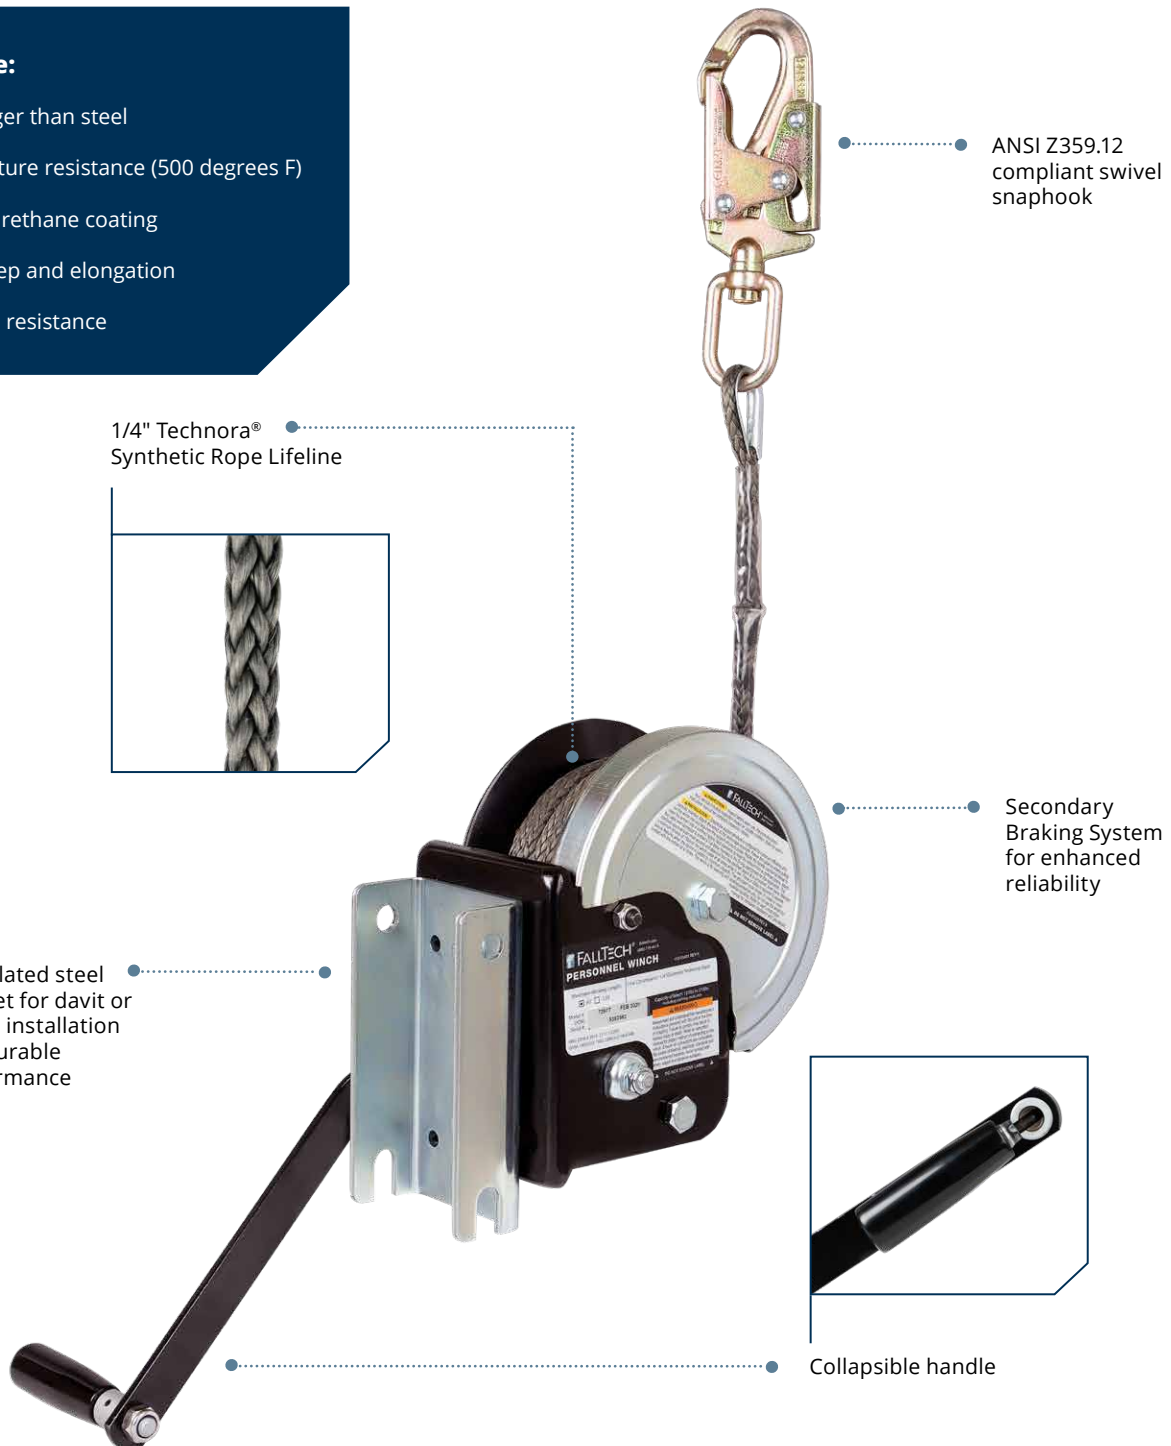

60' Technora® Rope Personnel Winch



Technora® Rope Personnel Winch shown mounted on a Tripod System (7275)



Technora® Rope Personnel Winch mounted on a Davit System (6050128)

Material Specifications	
Lifeline Constituent	1/4" Technora® Synthetic Rope Min. 4,500 lbs. Tensile Strength
Connector	Zinc Plated Alloy Steel Min. 5,000 lbs. Tensile Strength with 3,600 lbs. Gate Strength
Drive and Drum Gears	Alloy Steel
Integral Bracket	Zinc Plated Alloy Steel

Relevant Standards	
ANSI	Z359.4-2013 Z117.1-2016
OSHA	1926.502, 1926.1200 1926.146

Performance Specifications	
Static Strength	3,100 lbs. Minimum
Handle Operation Force	30 lbs. Maximum
User Capacity	130 to 310 lbs. Maximum

Part Numbers & Lengths	
Part No.	7297T
Rope Length	60'