

Aluminum Access Panel Doors

Designed to provide convenient access to mechanical, electrical, and plumbing systems concealed behind walls or ceilings, the Aluminum Access Panel series offers a lightweight, insulated solution that reduces sound transmission and resists moisture. Available in a wide range of sizes, it's the perfect choice for Interior commercial and residential applications.




Screwdriver Latch



Cylinder Lock and Key Latch
 Minimum 2x Keys Included




Rear Side

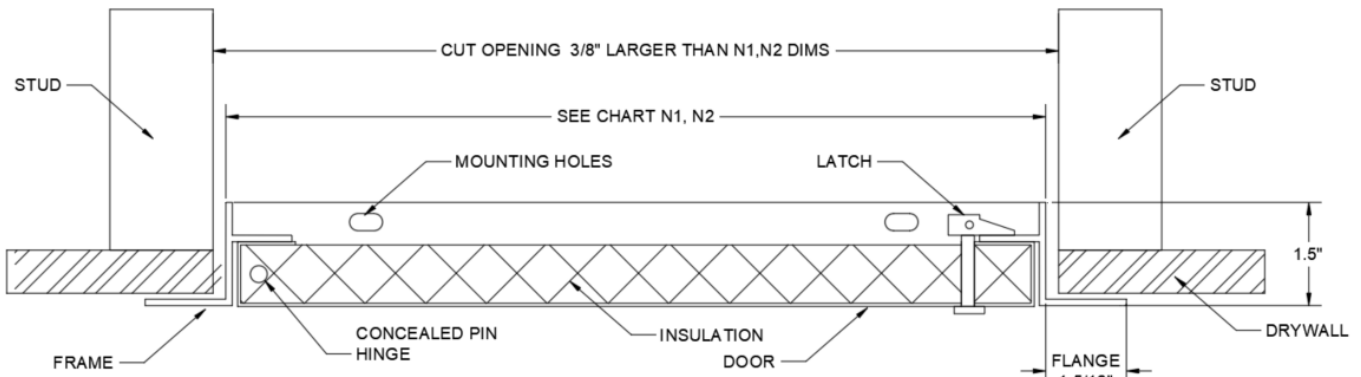

Aluminum Access Panel Doors



Screwdriver Latch

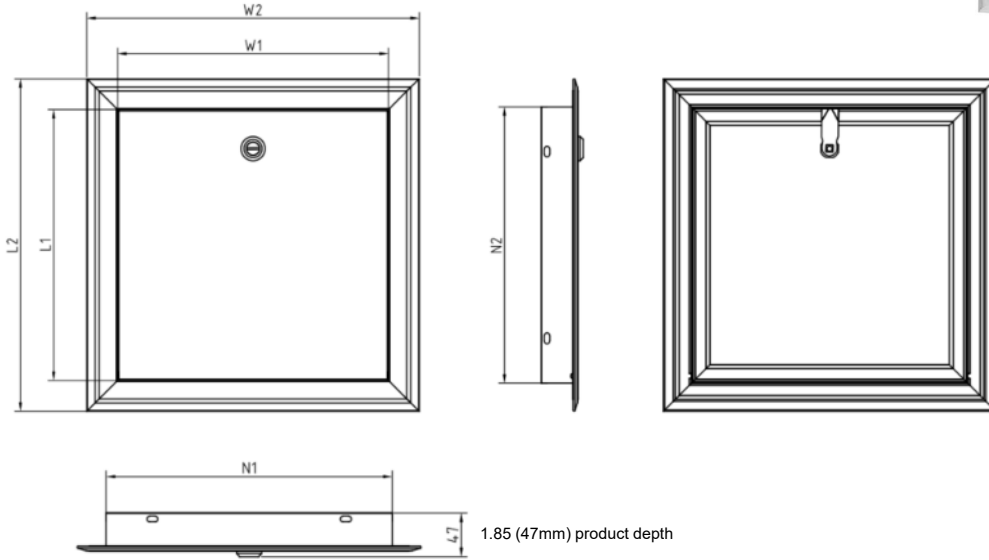

Screw Driver Latch	Dynasty Item #	Nominal Size (in)	Neck Size N1		Neck Size N2		Opening Size W1		Opening Size L1		Overall Size W2		Overall Size L2	
			mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
			AL-2400-12x12	12x12	311	12.24	311	12.24	305	12.01	305	12.01	374	14.72
AL-2400-14x14	14x14	361	14.21	361	14.21	355	13.98	355	13.98	424	16.69	424	16.69	
AL-2400-16x16	16x16	412	16.22	412	16.22	406	15.98	406	15.98	475	18.70	475	18.70	
AL-2400-18x18	18x18	463	18.23	463	18.23	457	17.99	457	17.99	526	20.71	526	20.71	
AL-2400-20x20	20x20	514	20.24	514	20.24	508	20.00	508	20.00	577	22.72	577	22.72	
AL-2400-22x22	22x22	565	22.24	565	22.25	559	22.00	558.8	22.00	627	24.69	627	24.69	
AL-2400-24x24	24x24	615	24.21	615	24.21	609	23.98	609	23.98	678	26.69	678	26.69	
AL-2400-30x30	*30x30	768	30.24	768	30.24	762	30.00	762	30.00	831	32.72	831	32.72	
AL-2400-36x36	*36x36	920	36.22	920	36.22	914	35.98	914	35.98	983	38.70	983	38.70	
AL-2400-24x30	*24x30	616	24.25	768	30.24	610	24.00	762	30.00	679.5	26.75	831	32.72	
AL-2400-24x36	*24x36	618	24.31	924	36.38	610	24.00	914	36.00	679	26.75	984	38.75	


*Items with astrix have 2 latches on door

- Specifications:** For Walls and Ceilings
- Material:** Aluminum: .064" (1.2mm) thk. door and .094" (2.4mm) thk. frame
- Door:** Flush to edge of frame
- Frame:** 1-5/16" mitered aluminum extrusion flange with 1-1/2" deep mounting frame
- Hinges:** Concealed Pin Hinge
- Door Opening Angle:** set to open to 180 degrees
- Insulation:** 3/4" expanded polystyrene (EPS) foil lined insulation, with 3.2 R-value at 75 degrees F mean temperature
- Gasketing:** Closed Cell EVA Foam 1/32" thk. x 3/8" wide
- Latch:** Screwdriver operated cam latch
- Finish:** Mill finish (aka unfinished)
- Fire Rated:** Not Rated
- Keys:** Not Included

Aluminum Access Panel Doors



Cylinder Lock and Key Latch

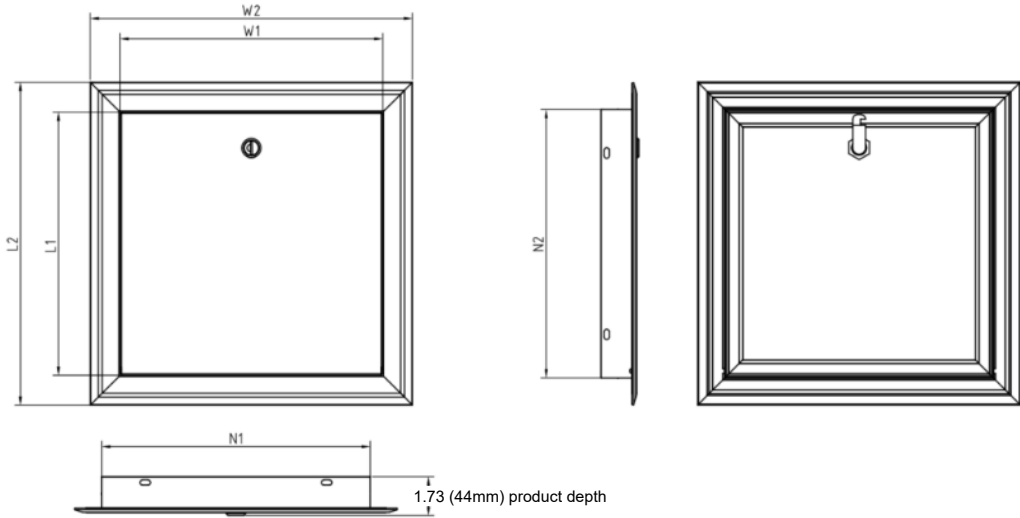

Dynasty Item #	Nominal Size (in)	Neck Size N1		Neck Size N2		Opening Size W1		Opening Size L1		Overall Size W2		Overall Size L2	
		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
AL-2400-12x12-K	12x12	311	12.24	311	12.24	305	12.01	305	12.01	374	14.72	374	14.72
AL-2400-14x14-K	14x14	361	14.21	361	14.21	355	13.98	355	13.98	424	16.69	424	16.69
AL-2400-16x16-K	16x16	412	16.22	412	16.22	406	15.98	406	15.98	475	18.70	475	18.70
AL-2400-18x18-K	18x18	463	18.23	463	18.23	457	17.99	457	17.99	526	20.71	526	20.71
AL-2400-20x20-K	20x20	514	20.24	514	20.24	508	20.00	508	20.00	577	22.72	577	22.72
AL-2400-22x22-K	22x22	565	22.24	565	22.25	559	22.00	558.8	22.00	627	24.69	627	24.69
AL-2400-24x24-K	24x24	615	24.21	615	24.21	609	23.98	609	23.98	678	26.69	678	26.69
AL-2400-30x30-K	*30x30	768	30.24	768	30.24	762	30.00	762	30.00	831	32.72	831	32.72
AL-2400-36x36-K	*36x36	920	36.22	920	36.22	914	35.98	914	35.98	983	38.70	983	38.70
AL-2400-24x30-K	*24x30	616	24.25	768	30.24	610	24.00	762	30.00	679.5	26.75	831	32.72
AL-2400-24x36-K	*24x36	618	24.31	924	36.38	610	24.00	914	36.00	679	26.75	984	38.75



*Items with astrix have 2 latches on door

- Specifications:** For Walls and Ceilings
- Material:** Aluminum: .064" thk. door and .094" thk. frame
- Door:** Flush to edge of frame
- Frame:** 1-5/16" mitered aluminum extrusion flange with 1-1/2" deep mounting frame
- Hinges:** Concealed Pin Hinge
- Door Opening Angle:** set to open to 180 degrees
- Insulation:** 3/4" expanded polystyrene (EPS) foil lined insulation, with 3.2 R-value at 75 degrees F mean temperature
- Gasketing:** Closed Cell EVA Foam 1/32" thk. x 3/8" wide
- Latch:** Cylinder lock & key
- Finish:** Mill finish (aka unfinished)
- Fire Rated:** Not Rated
- Keys:** Included Qty 2 minimum