
OVERLAND VEHICLE SYSTEMS

XD K2 Roof Top Tent Instructions

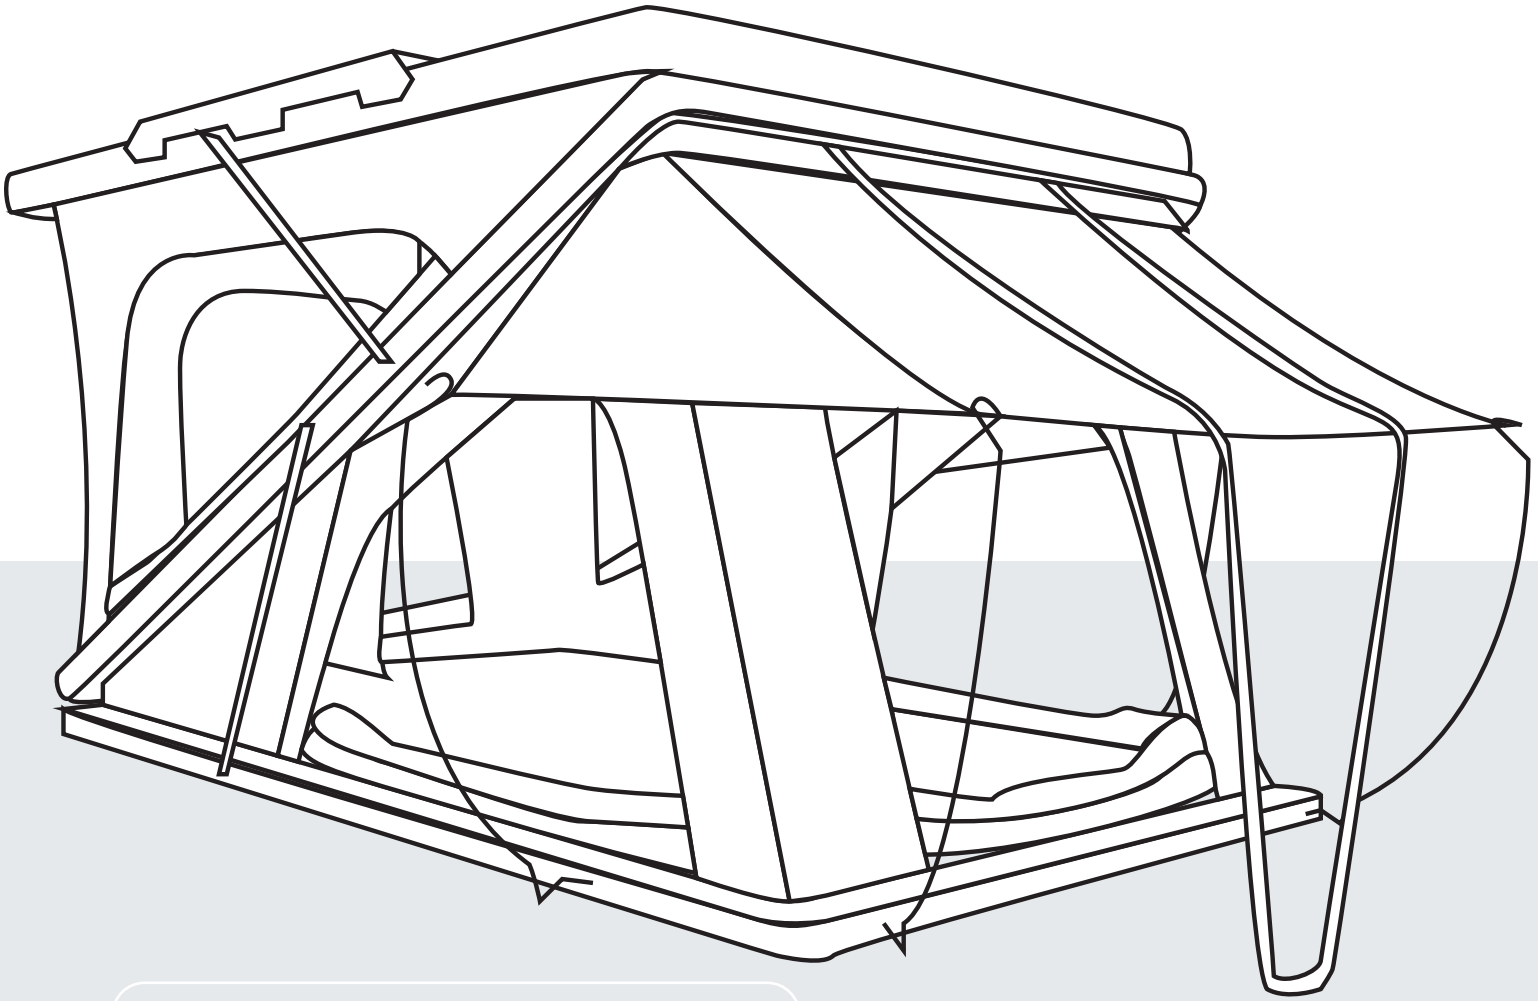

CAREFULLY READ INSTRUCTIONS PRIOR TO THE FIRST USE OF THE XD K2 ROOF TOP TENT

FEBRUARY 2026

GET TO KNOW YOUR XD K2 ROOF TOP TENT

We recommend you check all parts are included prior to first use.

COMPONENTS INCLUDED

4x Extrusion End Cap and Screws
4x Mounting Plate
8x Flat Washers
8x M8 x 1.25 14mm Long Bolt
8x M8 Nylon Lock Nut
1x Ladder
2x Window Rod
1x Spanner

GETTING STARTED

1

Find a flat area to work & open the carton. This will provide a clean surface to work on while tent is being set up. Check that all components are supplied.


ASSEMBLY OF COMPONENTS

2

Place the tent on top of your vehicle rack system, ensuring the mounting tracks are perpendicular to the bars they will mount to, and the tent is centered on the roof rack.


Position the hinge so that the tent will open to the desired side

Slide the 13mm bolts and channel sliders into the mounting tracks. Lift one side of the tent to position one set of bolts and channel sliders on the inner side of the roof rack bar and an additional set on the opposite side. Repeat on all four corners.

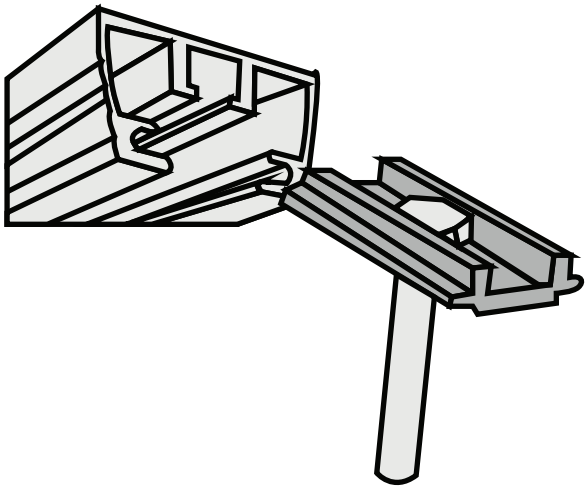


3

At each of the four corners where the rack bars and mounting tracks cross, using a steel mounting plate and nylock nuts to secure the bolts on either side of the bar. Tighten all eight bolts securely with the included nuts and wrench. Check all the mounting bolts and brackets periodically during use.

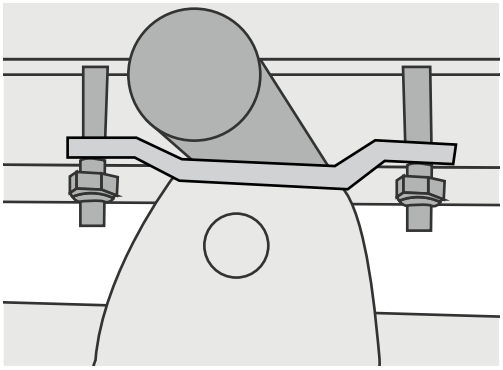

4

After ensuring the tent is positioned correctly and all eight bolts are tightened securely, insert rubber end caps into the ends of the mounting tracks. This may require light taps from a hammer.

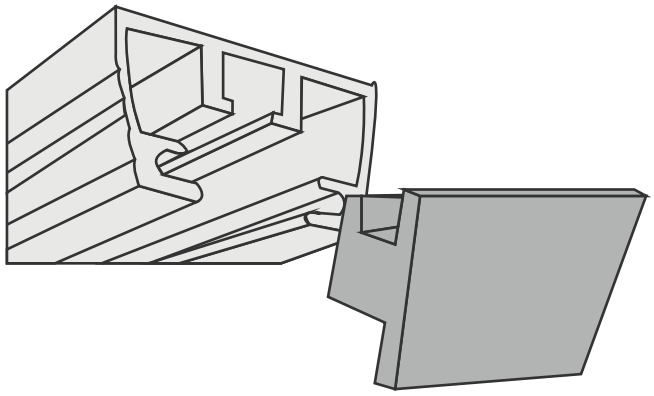

5


• Avoid storing your tent wet. If conditions dictate that you do, open, and dry out as soon as possible to avoid moisture damage.

• The overall height of your vehicle is increased when driving with your roof top tent.

• The center of gravity is altered when the rooftop tent is fitted to your vehicle. Adjust your driving to accommodate this change.


Your Roof Top Tent is located so it will open to the rear of the vehicle.

The minimum spacing between the roof rails is to be 48 inches to ensure that the tent is supported correctly, the weight is evenly distributed

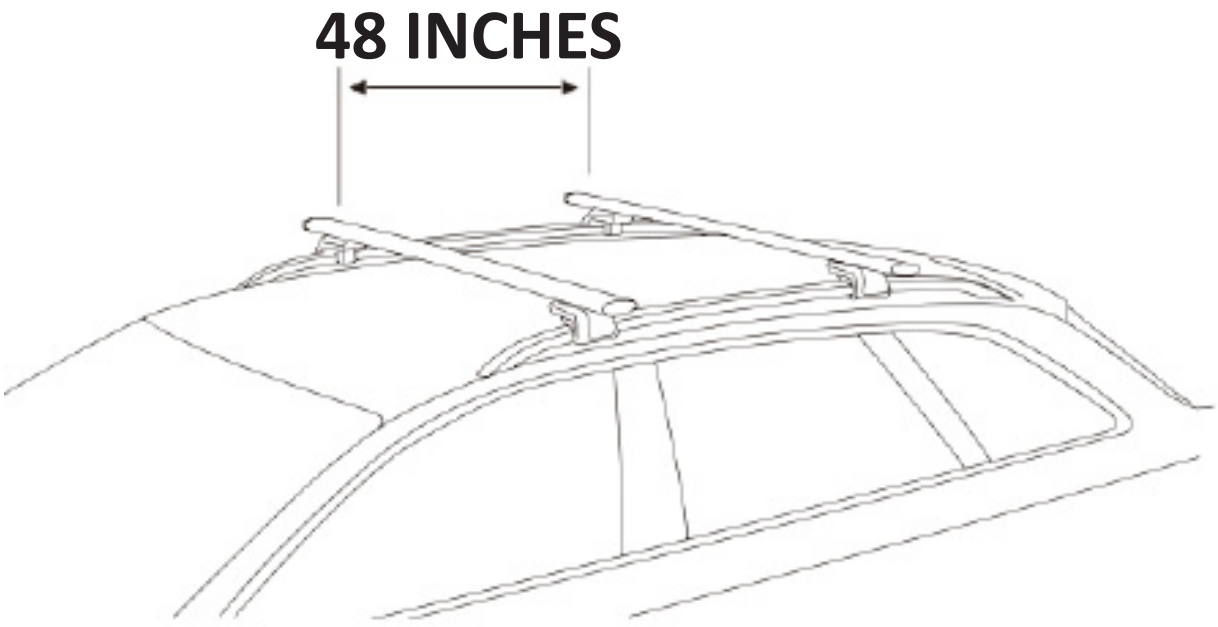



6

Locate the 2 Latches at the Rear of the Tent
Pull each latch downward, releasing its tension, then unhook from the bottom mount

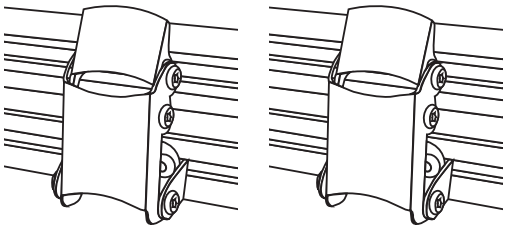



Push up on the ballistic nylon handle upward and the tent will rise up into a clamshell shape on its own.

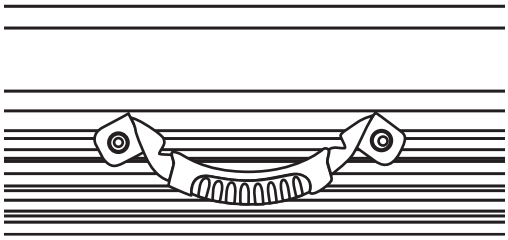

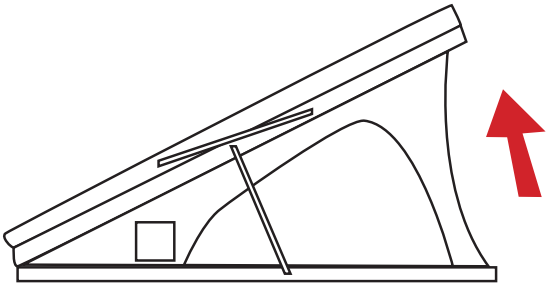


Next, un-do the remaining 2 latches at the front of the tent and push the top frame upward (slightly) and the gas struts will complete the second clamshell shape on its own.

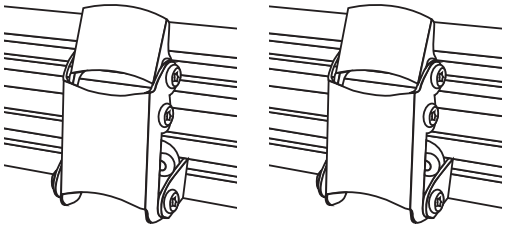

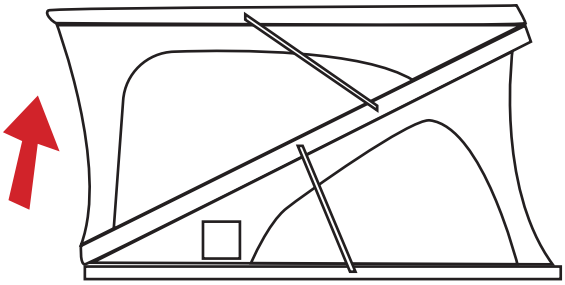

Once the tent is fixed securely to the vehicle's roof rack and the vehicle is positioned with the hand brake applied, attach the ladder, and ensure that it is secure and is locked in position and on an angle of 70 to 75 degrees.

The K2 Roof Top Tent Offers up to 3 Entry points when on a vehicle and up to 4 when on a trailer. Adjust ladder mounts and/or desired entry point accordingly if paired with an awning or other products mounted to the sides of your vehicle's roof.

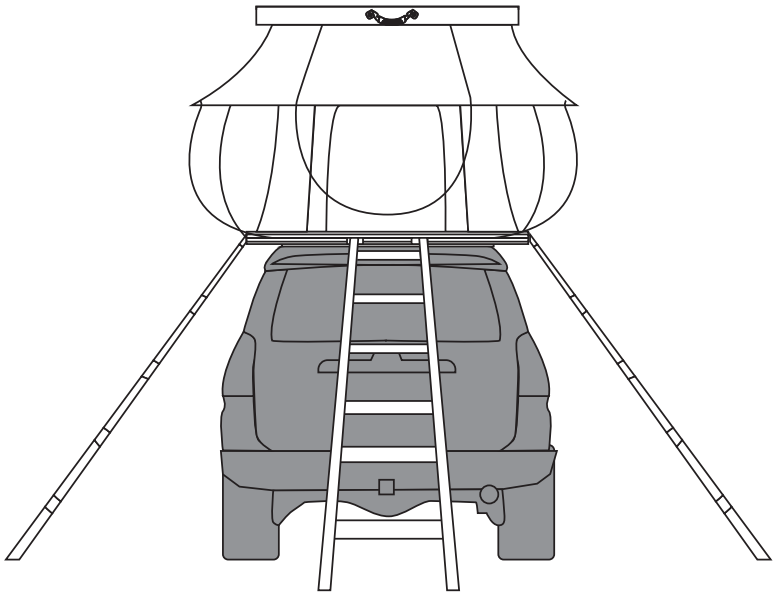

XD K2 Roof Top Tent

SET-UP & CARE INSTRUCTIONS

FEBRUARY 2026

CLEANING

1. Open the tent fully and brush / vacuum inside.
2. Clean the fabric as needed using a mild detergent, warm water, and a soft to medium brush. Rinse fabric of all detergent prior to drying.
3. Dry tent in the sun with all windows open. The tent must be completely dry before storage, or mildew and mold may occur. This is especially necessary after camping in rain or wet conditions.
4. Using a small brush, remove dirt from zippers. Use a silicon spray to keep zippers lubricated.
5. Using a small brush, remove dirt from zippers. Use a silicon spray to keep zippers lubricated.
6. Wash mattress pad and hang dry

CLOSING & STORING

• It is possible to leave sleeping bags and pillows on the mattress if laid flat, however these may need to be removed if it is difficult to close the tent, as this may put excessive pressure on hinges and latches that may cause failures or damage to the tent.

• Exit the tent and detach the flexible awning stays and store.

• Return the external shock cord to the center of the fabric to allow the canvas to be pulled toward the center of the tent.

• Using the storage strap, pull the lid in a downwards direction, as the lid is being pulled down check that the canvas is tucked in and is not trapped between the rubber seal around the edge of the tent body, secure the strap and excess fabric and lock the latches then store the ladder.

WARRANTY

Limited Lifetime Warranty: The XD K2 Clam Shell Pop Up Aluminum Roof Top Tent has 6 Year Fabric and Lifetime Structural. Overland Vehicle Systems warranty includes coverage for products with manufacturer defects in materials and workmanship. Overland Vehicle Systems will not be responsible for incorrect installation on your Vehicles Factory (OEM) or Aftermarket Mounting solution you choose. If upon determination by Overland Vehicle Systems that the Roof Top Tent is defective, Overland Vehicle Systems will replace without charge, with an equivalent Roof Top Tent to the original purchaser according to the instructions supplied with the Roof Top Tent, and not damaged due to abuse, misuse or negligence. This warranty will not cover any labor charges incurred in installation, removal, replacement or repair, transportation cost or any consequential damages, which might be caused by the product. Overland Vehicle Systems shall not be liable in case of; • Improper installation or modification of original product. • Damages resulting from abuse • Improper installation • Any commercial application If the original purchaser finds a defect in material or workmanship, please contact Overland Vehicle Systems Warranty Service, 9830 Norwalk Blvd Suite 130, Santa Fe Springs, CA 90670. Please include proof of purchase or sales receipt. The law in some states may expand or modify this warranty. This warranty supersedes all other warranties, expressed or implied.

⚠ WARNINGS

• THE K2 ROOF TOP TENT HAS BEEN DESIGNED FOR GENERAL CAMPING USE UNDER NORMAL CONDITIONS.

• TO AVOID CHANCES OF PERSONAL INJURY AND PROPERTY DAMAGE, WE HIGHLY RECOMMEND THE K2 ROOF TOP TENT SHOULD NOT BE ERECTED DURING WINDY CONDITIONS AS PERSONAL INJURY AND OR PROPERTY DAMAGE MAY OCCUR.

• DO NOT CUT OR MODIFY THE TENT OR MOUNTING ACCESSORIES.

• DO NOT EXCEED THE VEHICLE MANUFACTURER'S WEIGHT LIMITS.

• PERIODICALLY CHECK THAT ALL NUTS AND BOLTS ARE SECURELY FASTENED TO THE RTT AND YOUR VEHICLE.

• ENSURE THEY ARE TIGHT AND GOOD CONDITION

• DO NOT USE DAMAGED OR EXCESSIVELY WORN
PRODUCTS. CONTACT US IF YOU ARE UNSURE.

• KEEP ALL FLAMES AND HEAT SOURCES AWAY FROM THE FABRIC

•UNDER NO CIRCUMSTANCES SHOULD ANY NAKED FLAME SOURCES BE USED NEAR THE TENT, KEEP FIRES AWAY FROM THE TENT

• KEEP A LOOK OUT FOR ANY AIRBORNE BURNING EMBERS THAT MAY COME IN CONTACT WITH THE TENT. KEEP A FIRE EXTINGUISHER OR BUCKET OF WATER NEAR BY.

• DO NOT OPERATE ANY DEVICES WHICH BURN FUEL INSIDE THE TENT WHILE THE WALLS ARE ATTACHED.

• KEEP EXITS CLEAR

• KEEP AN EYE OUT FOR CHILDREN WHEN TENT IS IN USE

• STOW AWAY TENT BEFORE OPERATING VEHICLE

DO YOU NEED OUR HELP?

CUSTOMER SUPPORT 833-226-4863

SALES@OVERLANDVEHICLESYSTEMS.COM

WANT TO SHOW US YOUR RIG? CHECK OUT OUR SOCIAL!

@overlandvehiclesystems