

# 5262-IG

15 Amp Isolated Ground Duplex Receptacle/Outlet, Industrial Grade, Self-Grounding

Isolated Ground Duplex Receptacle Outlet, Heavy-Duty Industrial Specification Grade, Smooth Face, 15 Amp, 125 Volt, Back and Side Wire, NEMA 5-15R, 2-Pole, 3-Wire, Self-Grounding - Orange

**ROHS Compliant :** Yes

## Technical Information

### AC Horsepower Ratings

**At Rated Voltage :** 1/2 HP

### Electrical Specifications

**Amperage :** 15 A

**Dielectric Voltage :**  
Withstands 3000 V min

**Grounding :** Self-Grounding

**Pole :** 2

**Temperature Rise :** Max 30C  
temperature rise at full rated current

**Voltage :** 125 VAC

**Wire :** 3

### Environmental Specifications

**Flammability :** Rated V-0 per UL 94

**Operating Temperature :** -40° C to 75°C

### Material Specifications

**Body Material :** PBT Polyester Blend

**Color :** Orange

**Face Material :** PBT Polyester Blend

**Grounding Screw :** #8 Hex Head, Triple-Drive Brass

**Line Contacts :** 0.030" Phosphor Bronze

**Strap Material :** Steel (Galvanized G60)

**Terminal Screws :** #8 Triple-Drive Brass

### Mechanical Specifications

**Product ID :** Ratings are permanently part of devices

**Screw Terminal Torque :** 14-18 in-lbs

**Terminal Accom. :** #14-#10 AWG

### Product Features

**Color :** Orange

**Device Type :** Duplex Receptacle Outlet

**Face Material :** PBT Polyester Blend

**Feature :** Smooth Face


**Color :**  Orange

**UPC Code :** 078477052440

**Country Of Origin :** Mexico

**NEMA :**  5-15R

### Available Colors :

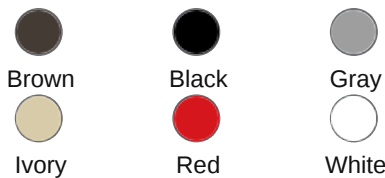

**Terminal ID** : Brass-Hot, Silver-Neutral, Green-Ground

**Termination** : Back and Side Wire

**Function** : Isolated Ground

**Grade** : Heavy-Duty Industrial Specification Grade

**NEMA** : 5-15R

**Termination** : Back and Side Wire

Standards and Certifications

**ANSI** : C-73

**CSA C22.2 No. 42** : File 152105

**NEMA** : WD-1 & WD-6

**NOM** : 057

**UL Fed Spec WC-596** : File E13399

**Warranty** : 10-Year Limited

**SPECIFICATION SUBMITTAL**

|                                            |                                                 |                      |
|--------------------------------------------|-------------------------------------------------|----------------------|
| <b>JOB NAME:</b><br><input type="text"/>   | <b>CATALOG NUMBERS:</b><br><input type="text"/> | <input type="text"/> |
| <b>JOB NUMBER:</b><br><input type="text"/> | <input type="text"/>                            | <input type="text"/> |

**Leviton Manufacturing Co., Inc**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S. T. Monday-Friday): +1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386- 1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

**Visit our Website at:** [www.leviton.com](http://www.leviton.com)

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts](http://www.leviton.com/international/contacts)

© 2024 Leviton Manufacturing Co., Inc.